




REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

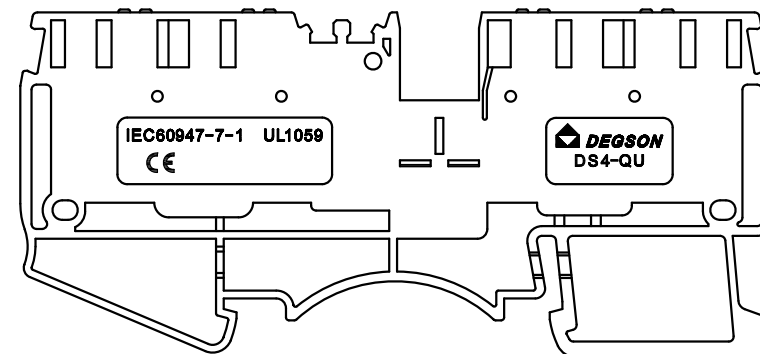

DS4-QU - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey) 6.(Red)
2.(Blue) 7.(Transparent)
3.(Black) 8.(Yellow)
4.(Green) 9.(White)
5.(Orange)

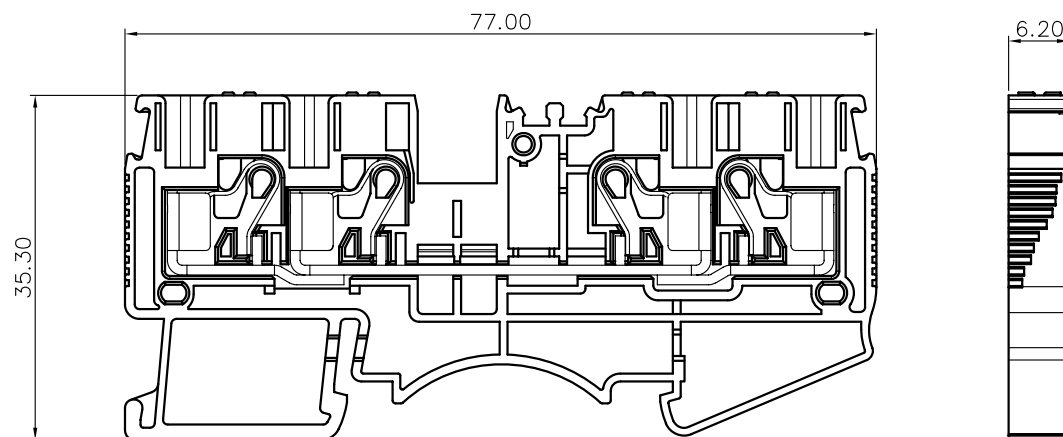

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 28A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Wire range : 24~10AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800 V
Rate current(A)	32 A


- 2.Wire range : 0.2~4mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : 01P
- 3.Stripping length : 10~12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm								
TO	Over	Over	TO	Over	Over	Over	Over		0.1/10	
6	6	10	30	30	60	100	150			
10	10	24	30	60	100	150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DS4-QU-01P-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
	 THIRD ANGLE PROJECTION				MM (INCH)		SHEET	1/1	SCALE
				DO NOT SCALE DRAWING		SCALE		1:1	