
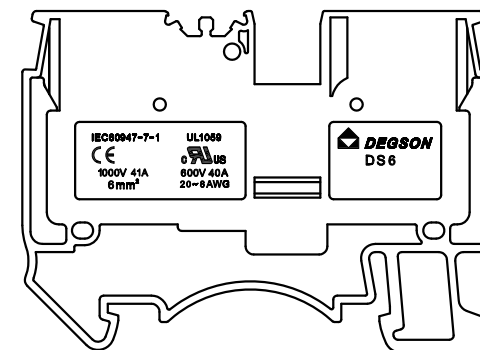
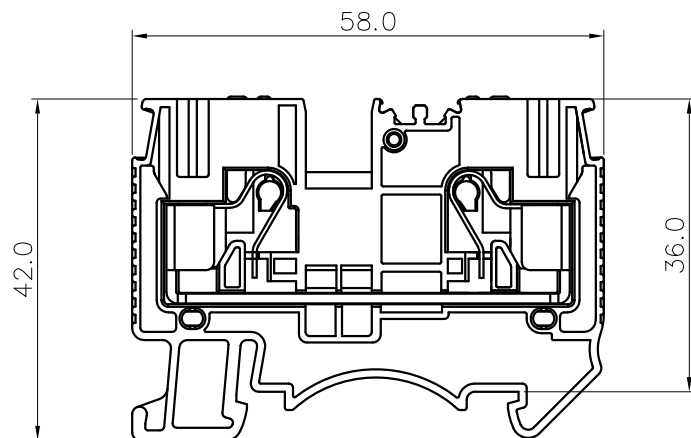


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



DS6 - 01P - 1Y - 00A (H)
(Series No.)(Poles)(Single Pitch) (Color):1.(Grey)
(RoHS)
00A-(Standard)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 40A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Wire range : 20~8AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	1000V
Rate current(A)	41A

2.Wire range : 0.5~6mm²&10mm²(sol)

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.2mm, Poles : N=01P
- 3.Stripping length : 10~12mm
- 4.Operating temperature:-40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm							0.1/10	±2°
TO	Over	TO	TO	Over	Over	Over	Over	TO	TO		
6	6	10	10	30	30	60	60	100	100		
6	10	24	30	60	100	150	150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°			

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DS6-01P-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
	THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING		SHEET	1/1	SCALE