

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密和与经营活动有关的知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.1.6

2

3






4

5

6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

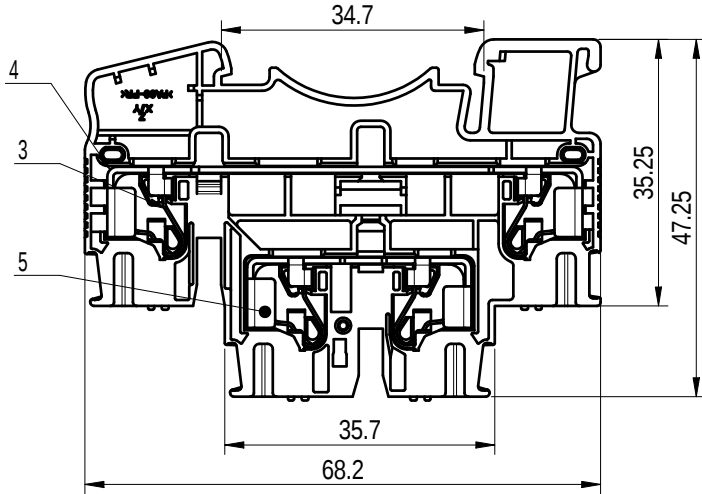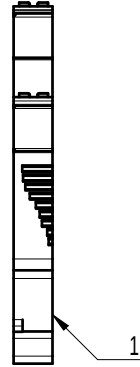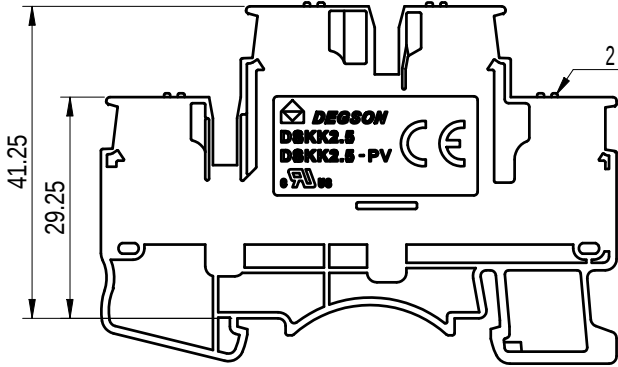

5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	300/20	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		500/22	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		26~12 / 0.2~2.54(Sol)		
间距/Pitch(mm)/线数范围/Poles		5.20/N=01P		
剥线长度/Stripping length(mm)		11~12		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL:		SURFACE/COLOR:	
APPD: 李根芳		MAT NO./REV:		MAT STATUS: 批量	
CHKD: 马恩升		NAME		DSKK2.5-01P-1Y-00A&Z(H)	
DRFT: 胡满敬		DRAWING NO.		DRAWING STATUS	
2022.09.26		200073134		已发布	
2022.09.26		TYPE		SCALE	
A4		CUSTOMER DRAWING		2:1	
(inch)		SHEET		1/1	

01	ECN	Change Wire diameter	胡满敬	2022.09.26
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6