
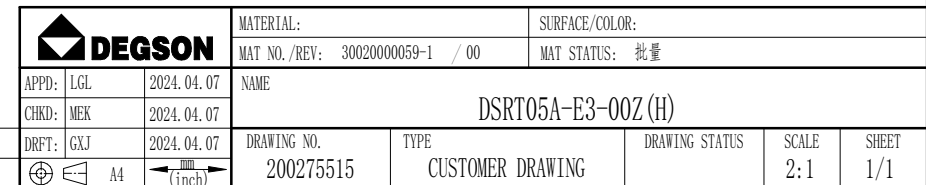


额定电流 /Rated current	12A
额定电压 /Rated voltage	300V
线圈/触点介质耐压 /Coil/Contact dielectric voltage	3000V/S
触点间介质耐压/Dielectric voltage between contact	2500V/S
螺钉扭矩 /Screw torque	1. 0Nm
外连接导线 /External connection wire	20-14 /0.5-2.5W/mm ²
环境温度 /Ambient temperature	-45-+65℃
重点管控符号 /Key controlled symbol	*
符合RoHS环保要求 /Conform to RoHS	
印字为激光打标, 印字内容清晰、无断线等 /Printing for laser marking, printing content is clear, no broken line, etc	
印字面按图中脚位参考 /Seal literal reference according to the foot position in the drawing	

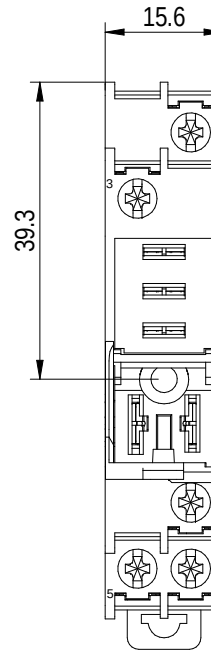

00	/	新图纸下发	GXJ	2024.04.0
REV	ECN	DESCRIPTION	DRFT	DATE