

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.1



2

3

4


5

6

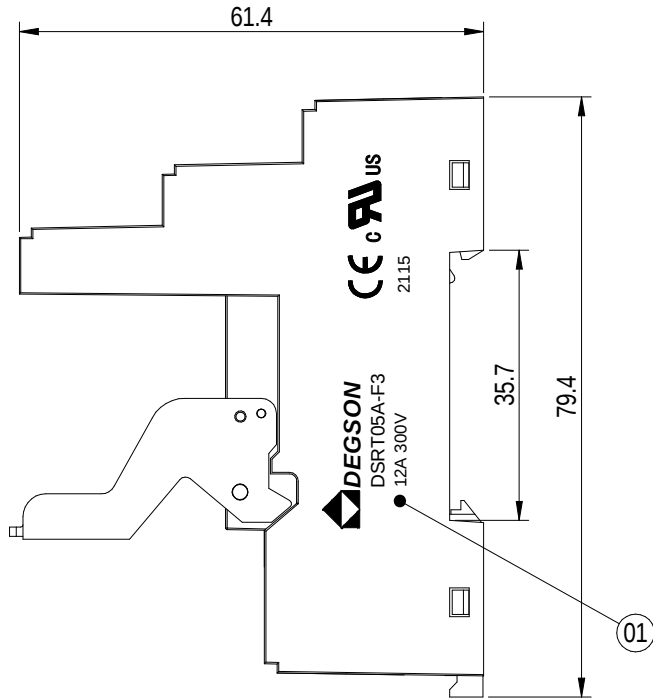

未注公差/General tolerances(mm)														 0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	 ±2'	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		
额定电流/Rated current													12A		
额定电压/Rated voltage													300V		
线圈/触点介质耐压/Coil/Contact dielectric voltage													3000V/S		
触点间介质耐压/Dielectric voltage between contact													2500V/S		
螺钉扭矩/Screw torque													1.0Nm		
外连接导线/External connection wire													20-14/0.5-2.5WC /mm ²		
环境温度/Ambient temperature													-45-+85℃		
重点管控符号/Key controlled symbol													*		
符合RoHS环保要求/Conform to RoHS															
印字为激光打标，印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect															
印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing															

备注：1个产品配有1个附件，如下图所示；
Note: 1 product is equipped with 1 accessory, as shown below;



01		Changed: Current 12A	GXJ	2024.12.16
REV	ECN	DESCRIPTION	DRFT	DATE

			MATERIAL:			SURFACE/COLOR:		
			MAT NO./REV: 30020000061-1 / 00			MAT STATUS: 批量		
APPD:	LGL	2024.12.16	NAME DSRT05A-F3-00Z (H)					
CHKD:	MEK	2024.12.16						
DRFT:	GXJ	2024.12.16						
		A4		DRAWING NO. 200287820	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1	SHEET 1/1