

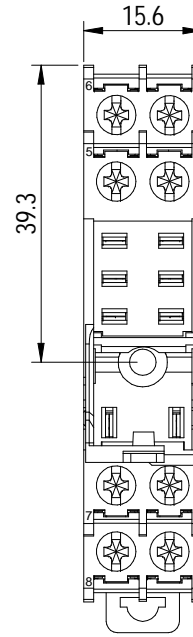


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent. 除专利号外，所有其他内容均受法律保护。未经授权，禁止复制或传播。 除专利号外，所有其他内容均受法律保护。 未经授权，禁止复制或传播。

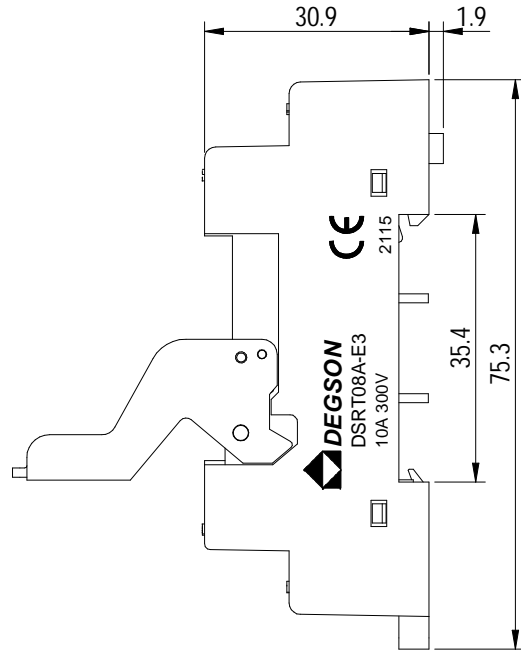

| 公差/General tolerances (mm) |       |       |       |       |       |       |       |       |       |       |       |       |       |        |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0                          | >3    | >6    | >10   | >18   | >30   | >50   | >80   | >120  | >180  | >250  | >315  | >400  | >500  | 0.1/10 |
| ~                          | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ~     | ∠      |
| ±0.12                      | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 | ±2'    |

|  |                                 |
|--|---------------------------------|
| 额定电流/Rated current   | 10A                             |
| 额定电压/Rated voltage   | 300V                            |
| 线圈/触点介电耐压/Coil/Contact dielectric voltage  | 3000V/S                         |
| 触点间介电耐压/Dielectric voltage between contact   | 2500V/S                         |
| 螺钉扭矩/Screw torque  | 1.0Nm                           |
| 外接导线/External connection wire  | 20-14/0.5-2.5WG/mm <sup>2</sup> |
| 环境温度/Ambient temperature   | -40~+65°C                       |
| 重点管控符号/Key controlled symbol   | *                               |
| 符合RoHS环保要求/Conform to RoHS   |                                 |
| 印字为激光打标，印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect |                                 |
| 印字面按图中脚位参考/Seal literal reference according to the foot position in the drawing                |                                 |

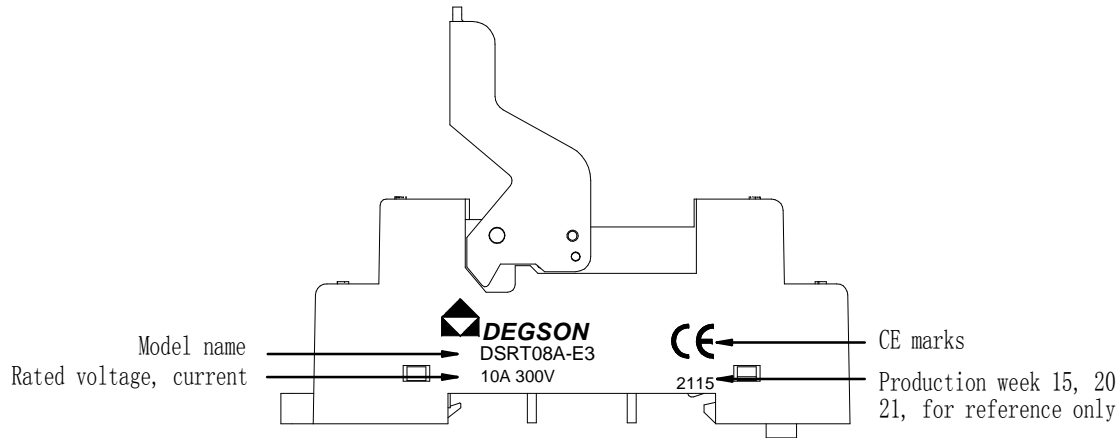

|           |            |                    |                                 |                |                |       |
|-----------|------------|--------------------|---------------------------------|----------------|----------------|-------|
|           |            |                    | MATERIAL:                       |                | SURFACE/COLOR: |       |
|           |            |                    | MAT NO./REV: 30020000060-1 / 00 |                | MAT STATUS: 批量 |       |
| APPD: LGL | 2024.04.07 | NAME               |                                 |                |                |       |
| CHKD: MEK | 2024.04.07 | DSRT08A-E3-00Z (H) |                                 |                |                |       |
| DRFT: GXJ | 2024.04.07 | DRAWING NO.        | TYPE                            | DRAWING STATUS | SCALE          | SHEET |
|           |            | 200275514          | CUSTOMER DRAWING                |                | 2:1            | 1/1   |

| REV | ECN | DESCRIPTION | DRFT | DATE       |
|-----|-----|-------------|------|------------|
| 00  | /   | 新图纸下发       | GXJ  | 2024.04.07 |