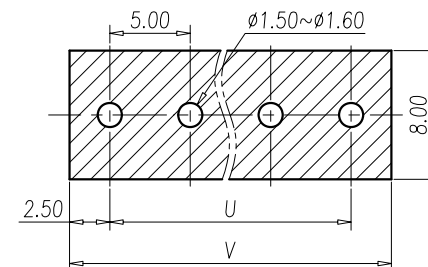
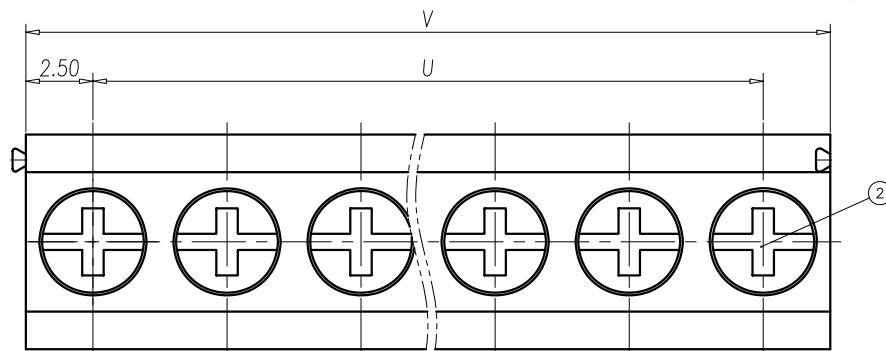


NOTES 2:

1. RoHS compliance
- 2.Strip Length:6~7mm

P.C.B. LAYOUT(REF)




NOTES 1:

UL Standard :

- 1.Rating: 300V 8A
- 2.Insulation Withstands Voltage:
AC 2000V at 1 minute
- 3.Using Temperature Range:
 $-40^{\circ}\text{C} \sim +115^{\circ}\text{C}$
4. Screw Torque Value: $0.5\text{N} \cdot \text{m}$
5. Suitable Electric Wire: AWG 26~14

IEC Standard:

- 1.Rating: 250V 17.5A
2. Rate Impulse Voltage: 4000V
- 3.Insulation Resistance:
500M Ω or more at DC500V
- 4.Using Temperature Range:
 $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$
- 5.Screw Torque Value: $0.5\text{N} \cdot \text{m}$
- 6.Suitable Electric Wire: $0.5 \sim 1.5\text{mm}^2$

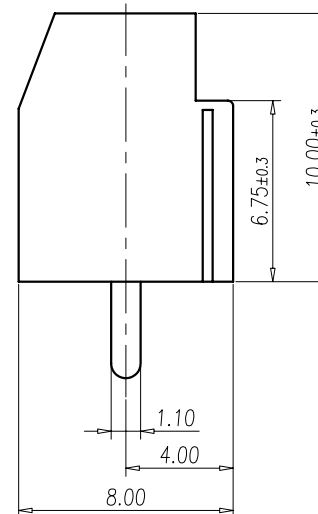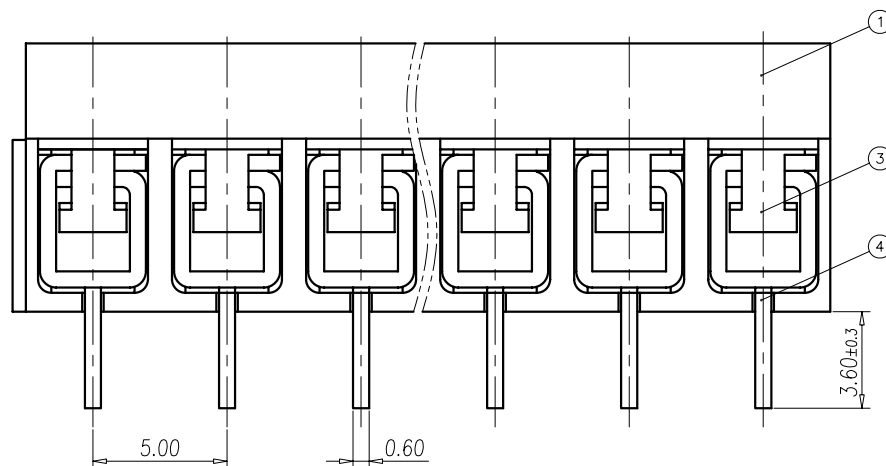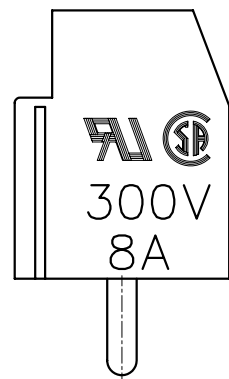

Normal Geometric Tolerancing

—	//	≡	⊥
0 to 100	0.2	0.3	0.2
over 100 to 150	0.3		0.3
over 150	0.5		

Total Pitch Tolerances

Normal Dimension Tolerances	
0~30	±0.20
over 30~53	±0.25
over 53~70	±0.30
over 70~90	±0.35
over 90~115	±0.44
over 115~150	±0.55
over 150~200	±0.70
over 200~250	±0.85
over 250~320	±1.00

P	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
U	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00	90.00
V	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00
P	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	
U	95.00	100.00	105.00	110.00	115.00	120.00	125.00	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	
V	100.00	105.00	110.00	115.00	120.00	125.00	130.00	135.00	140.00	145.00	150.00	155.00	160.00	165.00	170.00	175.00	180.00	

4	SOLDER PIN	COPPER-ALLOY	Tin Plated
3	WIRE PROTECTOR	STEEL	
2	SCREW	STEEL	M2.5/Zn Plated
1	HOUSING	PA	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	HJP	DATE	15.03.06	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	5:1 (:)		
APP.		DATE					
DINKLE ENTERPRISE CO.,LTD				NAME	DT-126VP-XXP		
REV.				CONTENT	NAME	DATE	DWG NO. SP-03-DT126VPX