




Barrier Style Terminal Blocks / DT-49



DT-49-B01X-XX

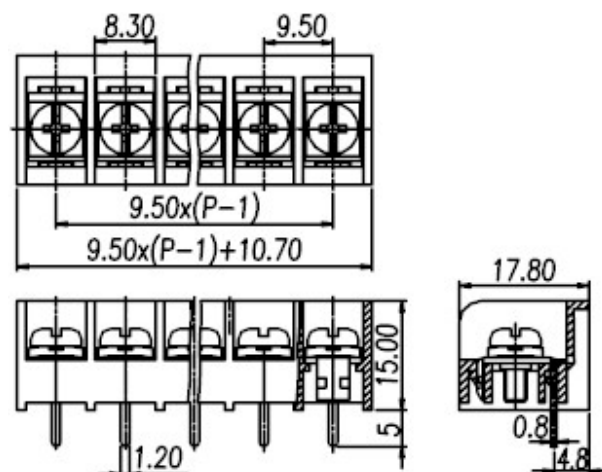

Pitch: 9.50mm

ORDER GUIDE

DT - 49 - 01 -

Pole size: 02~31P

N : Round head screw

W : Screw with washer

A : Mount Ends

B : Barrier Ends

Approval



Materials

Rated voltage	300V
Rated current	25A
Plastic Housing	PA6.6, UL94V-0, Black
Terminal	Brass, 0.8t, Tin plated
Screw	Steel, # 6-32, Nickel plated



Specifications

Working Temperature	-40°C ~ +105°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	500MΩ or more at DC500V
Wire range	22 ~ 12 AWG
Rated Torque Value	10Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw