


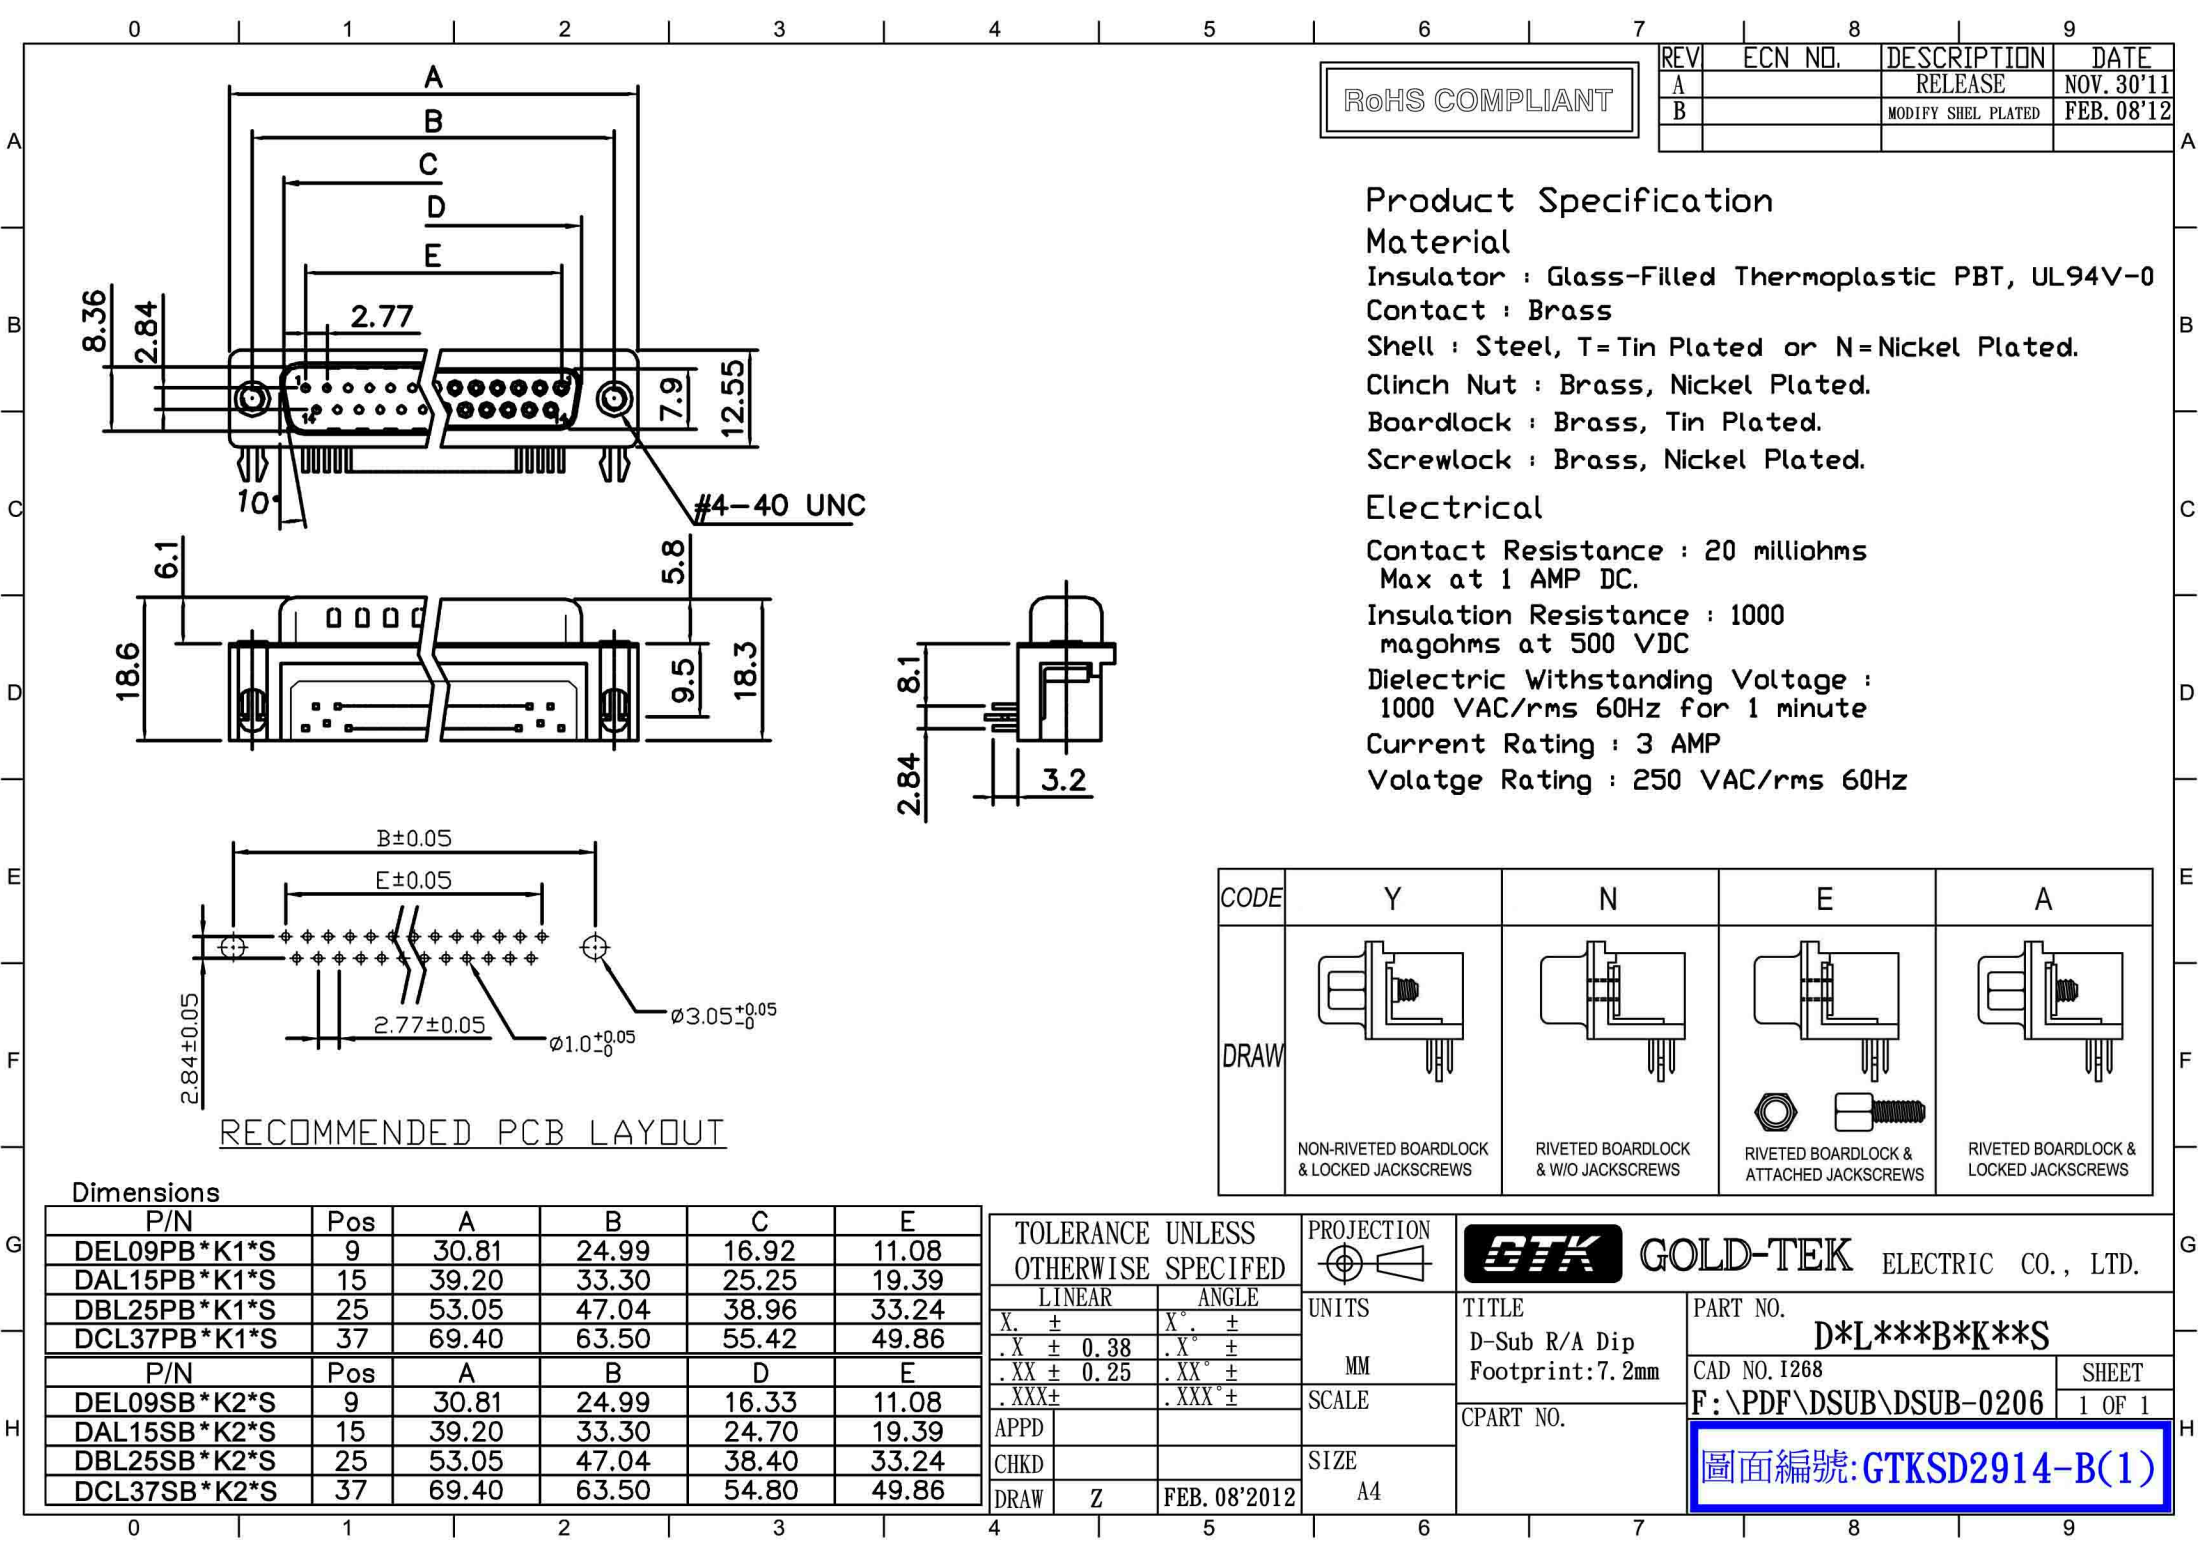

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	NOV. 30'11
B		MODIFY SHEL PLATED	FEB. 08'12

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Brass

Shell : Steel, T= Tin Plated or N= Nickel Plated.

Clinch Nut : Brass, Nickel Plated.

Boardlock : Brass, Tin Plated.

Screwlock : Brass, Nickel Plated.

Electrical

Contact Resistance : 20 milliohms
Max at 1 AMP DC.

Insulation Resistance : 1000
magohms at 500 VDC

Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

CODE	Y	N	E	A
DRAW				
	NON-RIVETED BOARDLOCK & LOCKED JACKSCREWS	RIVETED BOARDLOCK & W/O JACKSCREWS	RIVETED BOARDLOCK & ATTACHED JACKSCREWS	RIVETED BOARDLOCK & LOCKED JACKSCREWS

RECOMMENDED PCB LAYOUT

Dimensions

P/N	Pos	A	B	C	E
DEL09PB*K1*S	9	30.81	24.99	16.92	11.08
DAL15PB*K1*S	15	39.20	33.30	25.25	19.39
DBL25PB*K1*S	25	53.05	47.04	38.96	33.24
DCL37PB*K1*S	37	69.40	63.50	55.42	49.86
P/N	Pos	A	B	D	E
DEL09SB*K2*S	9	30.81	24.99	16.33	11.08
DAL15SB*K2*S	15	39.20	33.30	24.70	19.39
DBL25SB*K2*S	25	53.05	47.04	38.40	33.24
DCL37SB*K2*S	37	69.40	63.50	54.80	49.86

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX±	.XXX° ±
APPD	
CHKD	
DRAW	Z

PROJECTION

UNITS
MM
SCALE
SIZE
A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
D-Sub R/A Dip
Footprint:7.2mm

PART NO.
D*L***B*K**S

CAD NO. I268
F:\PDF\DSUB\DSUB-0206

SHEET
1 OF 1

圖面編號:GTKSD2914-B(1)