


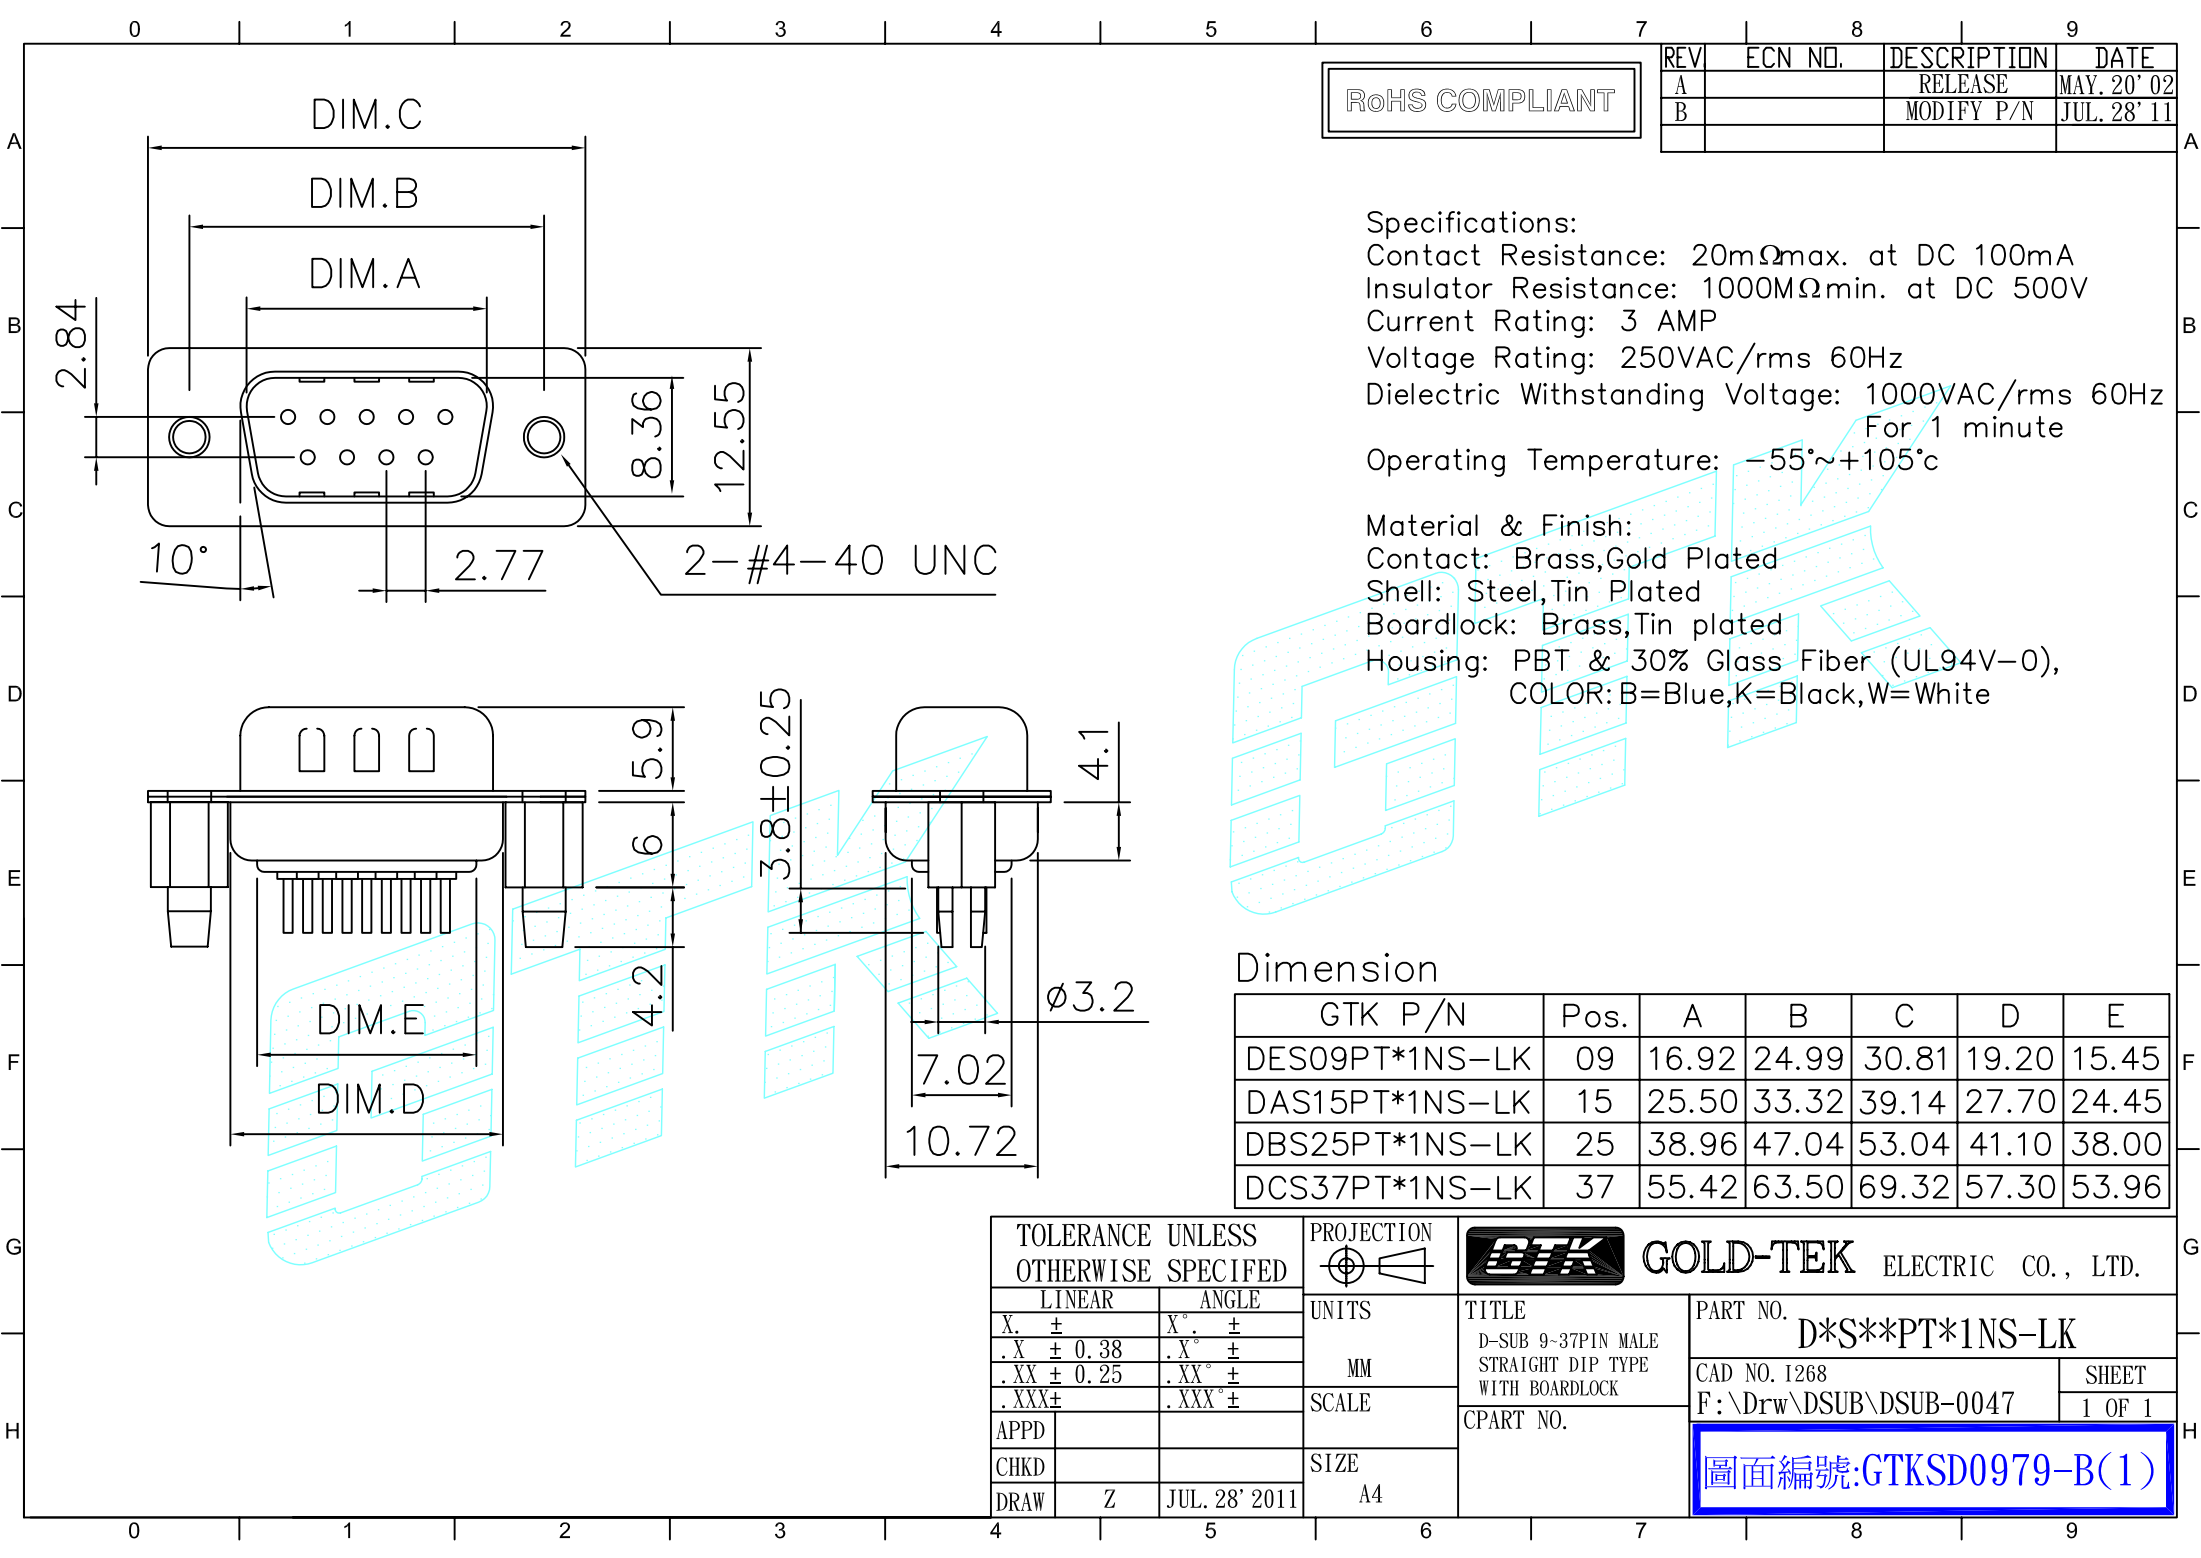

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAY. 20' 02
B		MODIFY P/N	JUL. 28' 11

Specifications:
Contact Resistance: 20mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 3 AMP
Voltage Rating: 250VAC/rms 60Hz
Dielectric Withstanding Voltage: 1000VAC/rms 60Hz For 1 minute
Operating Temperature: -55~+105℃

Material & Finish:
Contact: Brass,Gold Plated
Shell: Steel,Tin Plated
Boardlock: Brass,Tin plated
Housing: PBT & 30% Glass Fiber (UL94V-0),
COLOR: B=Blue,K=Black,W=White

Dimension

GTK P/N	Pos.	A	B	C	D	E
DES09PT*1NS-LK	09	16.92	24.99	30.81	19.20	15.45
DAS15PT*1NS-LK	15	25.50	33.32	39.14	27.70	24.45
DBS25PT*1NS-LK	25	38.96	47.04	53.04	41.10	38.00
DCS37PT*1NS-LK	37	55.42	63.50	69.32	57.30	53.96

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION	 GOLD-TEK ELECTRIC CO., LTD.			
LINEAR		ANGLE		UNITS	TITLE D-SUB 9-37PIN MALE STRAIGHT DIP TYPE WITH BOARDLOCK	PART NO. D*S**PT*1NS-LK	
X. ±	X° ±	SHEET					
.X ± 0.38	.X° ±	1 OF 1					
.XX ± 0.25	.XX° ±						
.XXX±	.XXX° ±		MM	SCALE	CPART NO.		
APPD			SIZE				
CHKD			A4			圖面編號:GTKSD0979-B(1)	
DRAW	Z	JUL. 28' 2011					