

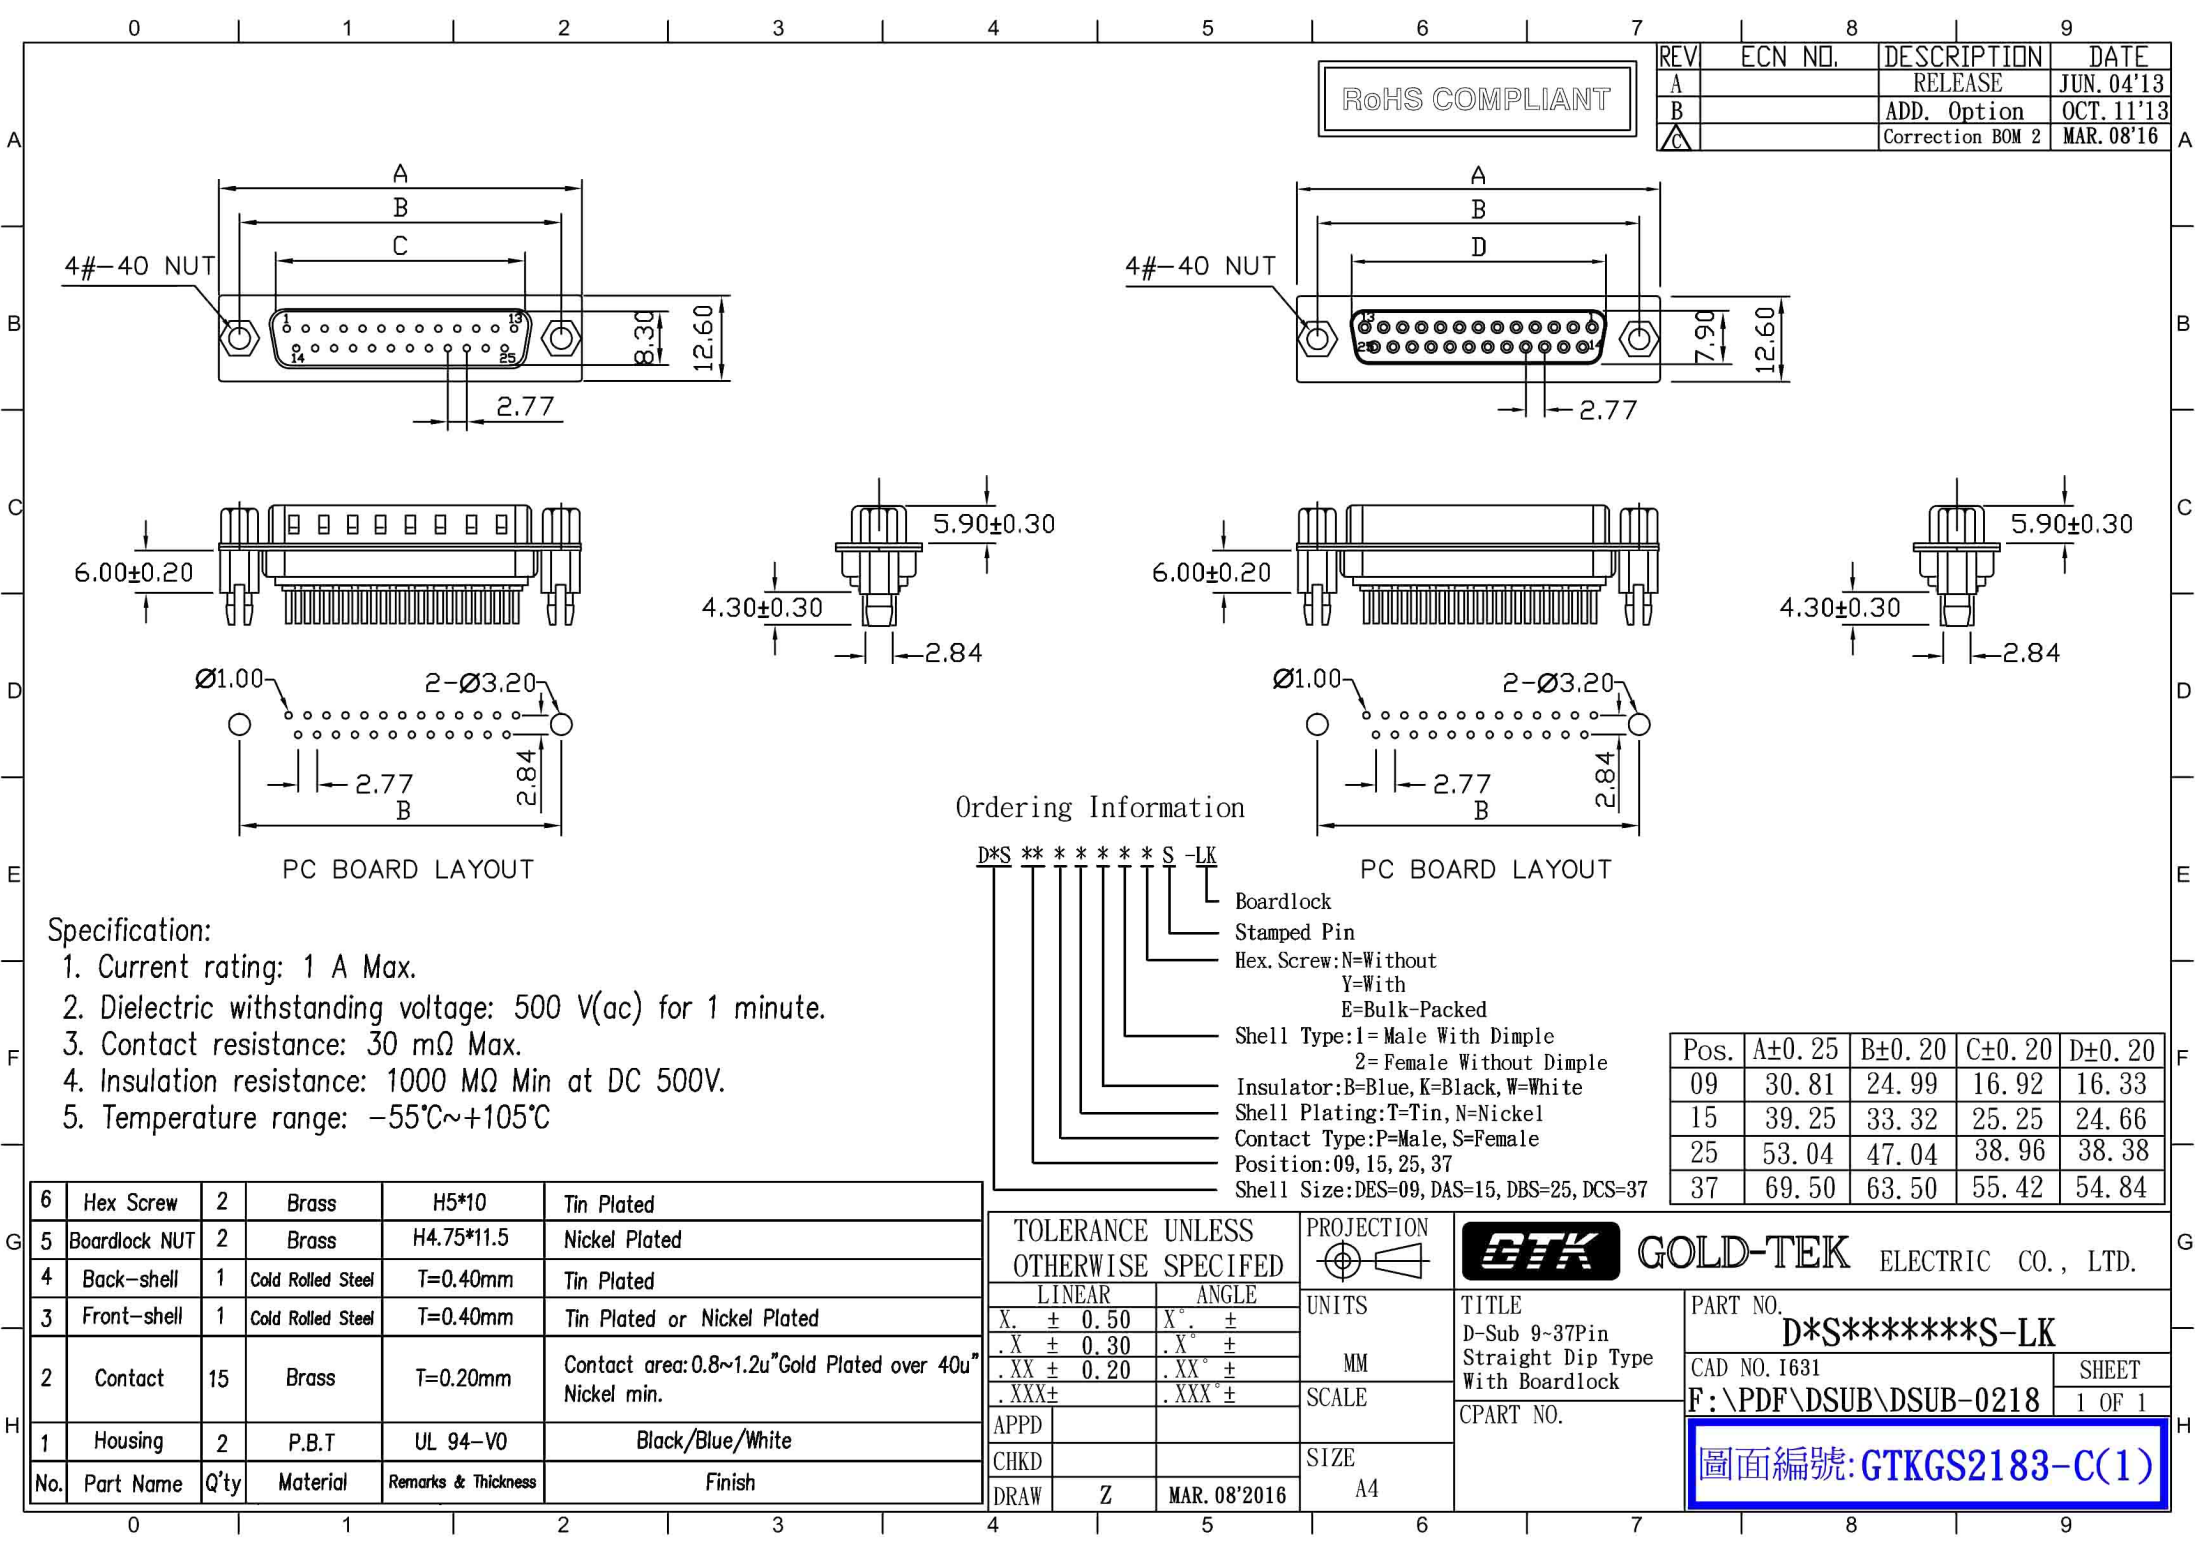
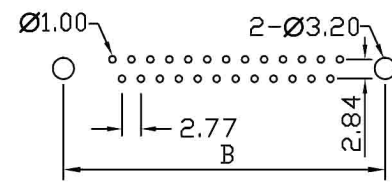
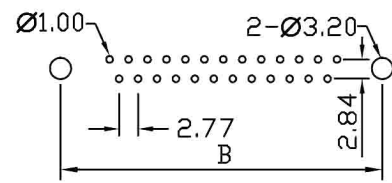
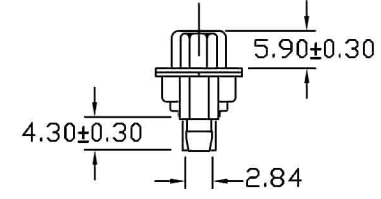
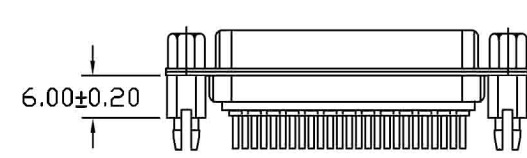
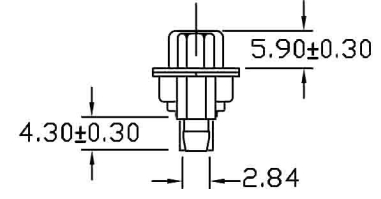
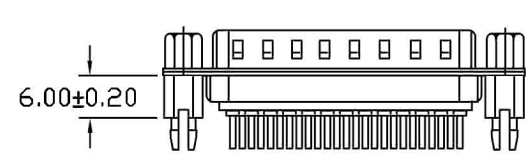


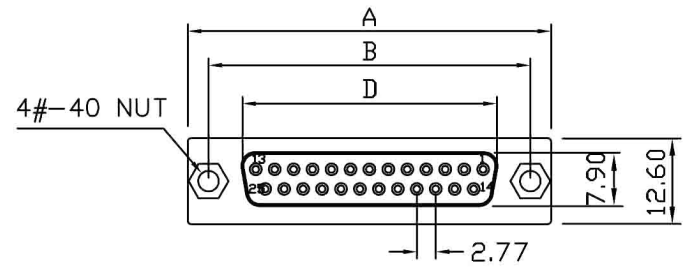

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 04'13
B		ADD. Option	OCT. 11'13
C		Correction BOM 2	MAR. 08'16

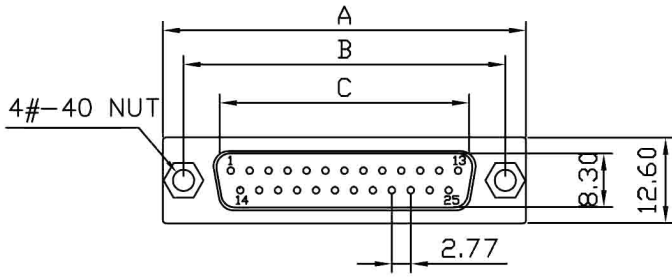

Ordering Information

- D*S ** * * * * S -L K
- Boardlock
 - Stamped Pin
 - Hex. Screw: N=Without, Y=With
 - E=Bulk-Packed
 - Shell Type: 1=Male With Dimple, 2=Female Without Dimple
 - Insulator: B=Blue, K=Black, W=White
 - Shell Plating: T=Tin, N=Nickel
 - Contact Type: P=Male, S=Female
 - Position: 09, 15, 25, 37
 - Shell Size: DES=09, DAS=15, DBS=25, DCS=37

Specification:

- Current rating: 1 A Max.
- Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- Contact resistance: 30 mΩ Max.
- Insulation resistance: 1000 MΩ Min at DC 500V.
- Temperature range: -55°C~+105°C

Pos.	A±0.25	B±0.20	C±0.20	D±0.20
09	30.81	24.99	16.92	16.33
15	39.25	33.32	25.25	24.66
25	53.04	47.04	38.96	38.38
37	69.50	63.50	55.42	54.84

6	Hex Screw	2	Brass	H5*10	Tin Plated
5	Boardlock NUT	2	Brass	H4.75*11.5	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated or Nickel Plated
2	Contact	15	Brass	T=0.20mm	Contact area: 0.8~1.2u" Gold Plated over 40u" Nickel min.
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR		ANGLE
X. ± 0.50	X° ±	
.X ± 0.30	.X° ±	
.XX ± 0.20	.XX° ±	
.XXX ±	.XXX° ±	
APPD		
CHKD		
DRAW	Z	MAR. 08'2016

PROJECTION
UNITS
MM
SCALE
SIZE
A4

GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE: D-Sub 9-37Pin Straight Dip Type With Boardlock

PART NO. D*S*****S-LK

CAD NO. I631

F:\PDF\DSUB\DSUB-0218

SHEET 1 OF 1

圖面編號: GTKGS2183-C(1)