





1. Schematic Diagram.

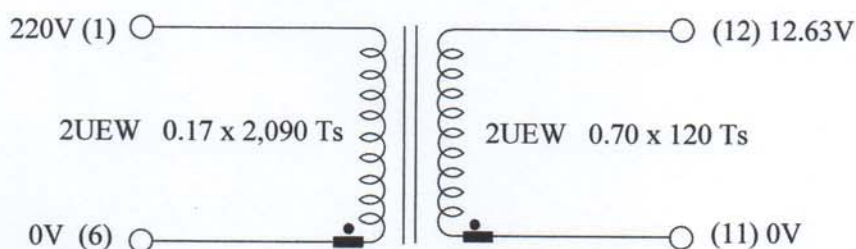

2. Configuration and Dimension.

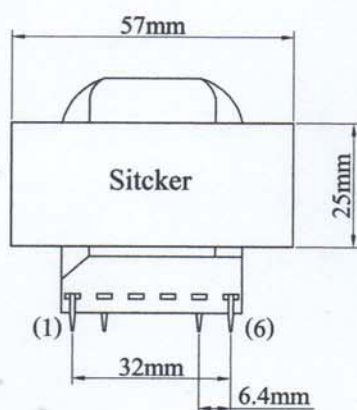

(11-12)=12V/1.5A
EEA : 57252110
DD,MM,YY
(1) 220V (6)

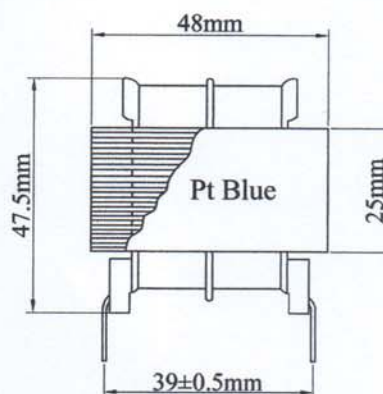

CUT PIN : 2 , 3 , 4 , 5 , 9 , 10

Material		
Item	Material	Description
1	Bobbin	Nylon 57 x 25 2T 12Pin
2	Copper wire	Polyster wire (2UEW 130 DEG.C)
3	Insulation tape	0.025mm (Blue , Yellow)
4	Varnish	Hi-Term BC-359
5	Lamination steel	EI-57-S14 x 0.50mm
6	Solder	60/40 Sn / Pb
7	Insulation Pb	0.18mm

Input and Output Voltage (±3%). Without load.	
Input	Pin 1 and 6 = 220V 50Hz
Output	Pin 11 and 12 = 12.63 VAC
High Potential Test.	
Apply AC 1.5KV 1mA, Coil to Core and Coil to Coil, for 1Munite. and Should not be any abnormality.	
Remaks.	
Print code, date of manafactury. Stack the lamination steel EI-57 one by one.	

EAST ELECTRIC ACCESSORY CO.,LTD

220/2 Saiwadcok Road Tambon Bangprok Amphur Muang Pathoomthanee 12000

Tel : +662 (02) 5811621-4 Fax : +662 (02) 5811620

www.eea-trafo.com E-mail : eea-trafo@hotmail.com

Customer : ELECTRONICS SOURCE	EEA Part No.: 57252110	Prepared by :
Customer Approval by :	Model : 220V-12V/1.5A	Approved by : 2
Position :	Revision : 1	Date : July 19, 2019