

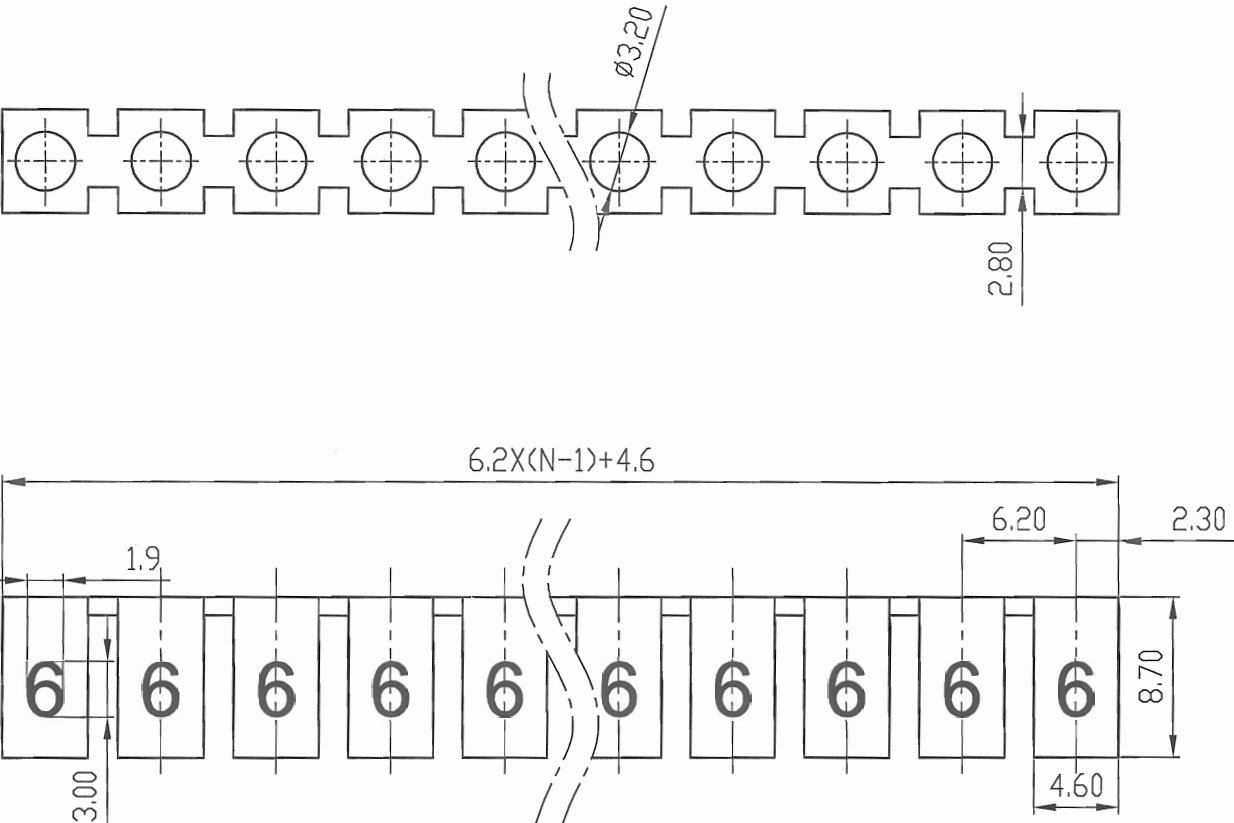


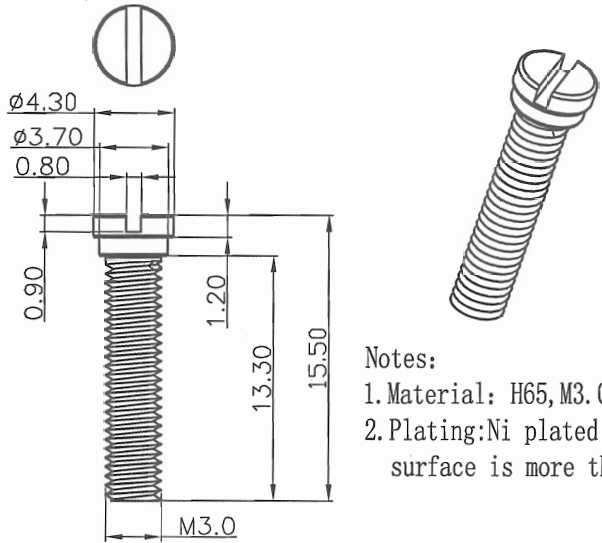


- Notes:
- 1. Pitch: 6.2mm, Poles: 2-10P;
 - 2. Material: T2Y2;
 - 3. Plating: Cu plated at the bottom is more than 2um; Sn plated at the bottom is more than 4um;
 - 4. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	$\pm 0.05/0$



- Notes:
- 1. Material: H65, M3.0;
 - 2. Plating: Ni plated on the surface is more than 2um;

Current carrier and screws should be packed individually, which must be put in the same box
载流体和螺丝分开包装, 必须放于同一内盒

2	FBI10-6 M3"—Screws	S000004610(H)		H65	Ni
1	FBIXX-6 Current carrier	6003BXX060(H)		T2Y2	SnCe
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	← MM CINCH →		 DEGSON ® DEGSON ELECTRONICS CO., LTD 宁波高正电子有限公司		
	TOLERANCES EXCEPT AS NOTED				
	MM				
	.0 ± .00 ± .000 ±				
	ANGLES ± 1°		NAME FBIXX-6		
	G.E :				
	FINISH:				
	SCALE : 1:1				
	THIRD ANGLE PROJECTION				
					
DRAWING NO. FBIXX-6-E01			SIZE A3	REV TO 06/14/11"	
/PART NO.					
DO NOT SCALE DRAWING			SHEET 1	OF 1	