


RoHS Compliant

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	22.11.08	NEW DRAWING	

UL&CSA GRADE:
UL Style.....2651
Rate Temperature.....-20°C to 105°C
Rate Voltage.....Max 300V
Flame Test.....VW-1

CSA Standard.....C22.2 NO.210.2
Rate Temperature.....-20°C to 105°C
Rate Voltage.....Max 300V
Flame Test.....FT1.FT2

Physical Property:
Stranded Conductor
AWG Size.....28AWG
Material of Insulation.....Polyvinyl Chloride(PVC)
Insulation thickness average.....9 mil
Print: PUYER AWM 2651 28AWG E350147 105°C
300V VW-1 -LF-

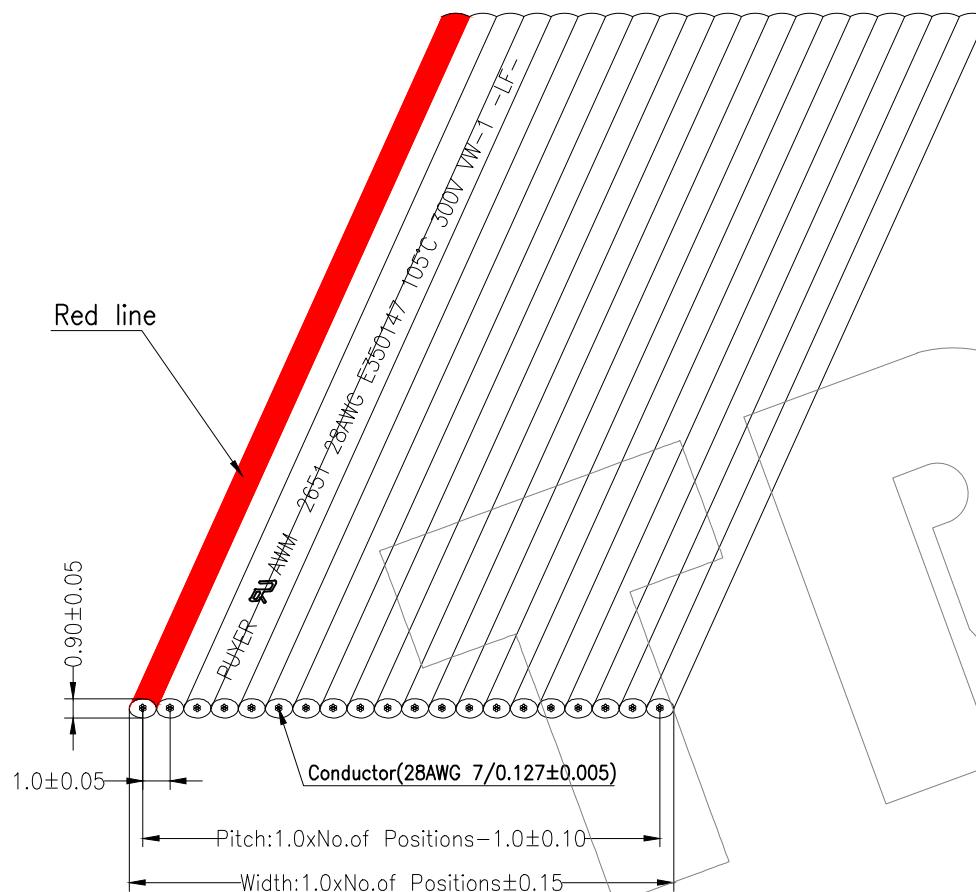

Ordering Information

FC 2 2651 - 28 XX 0305 - 01

Pitch
2=1.0

No.of Pins
4P~64P

Length
0305=30.5m/Reel

tsingre
www.tsingre.com

SHENZHEN TSINGRE TECHNOLOGY CO.,LTD

DRAW	Amy	OPERATION		SCALE	NTS	TITLE: 1.0mm Flat Cable UL2651 28AWG				
		X.X	±0.30	UNIT	mm	PRODUCT CUSTOMER DRAWING				
CHECK	Jose	X.XX	±0.20	SIZE	A4	PART NO.		DOC PART	REVISION	
		X.XXX	±0.10			FC22651-28XX0305-01		001	A0	
APPROVE	David	Angle	±3°	THIRD ANGLE PROJECTION 		CUSTOMER PART NO.		CUSTOMER	SHEET NUMBER	
		DIM	TOL							1 OF 1