
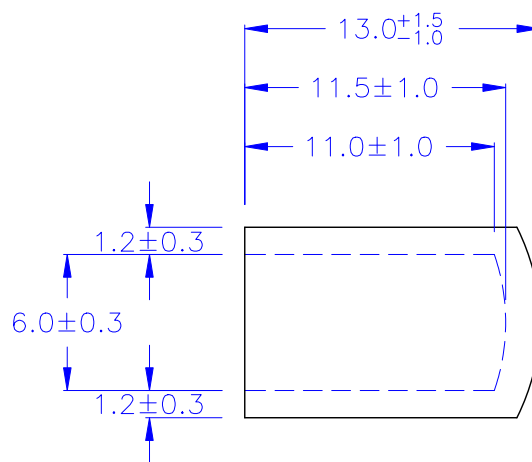


20.0

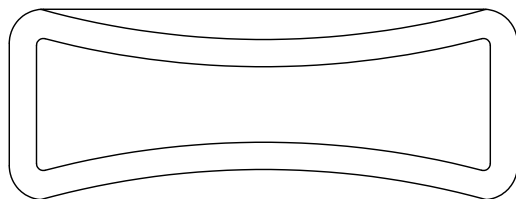

Miscellaneous Tubing, Polymeric
Guide Information

E122477

PROPANDA INDUSTRIAL CO LTD

2 KOUNG YEY 15 RD, TA LI INDUSTRIAL ZONE, TAI PING, TAICHUNG 411 TW

FH-1

Fuse covers

Voltage, V	Max Oper Temp. °C	Color Recognized	Oil-Resis Class [a]	Flammability [1][2]	Sunlight Resistant(UV)[a][b]
600	105	All	-	[1]	-

[+] - Tubing is considered to comply with the optional Oil Resistance requirements only if authorized in the above table and marked "Oil Resistant" (or "Oil Res"), followed by the class (01, 02 or 03).

[1] - Tubing is considered to comply with the optional VW-1 flammability requirements only if it is so marked.

[2] - Tubing is considered to comply with the All-Tubing flame test.

[a] - Tubing is considered to comply with the optional Sunlight Resistance requirements only if marked "Sun Res" (or "Sunlight Resistant").

[b] - Tubing complies with the Sunlight Resistance requirements and is marked "Sun Res" (or "Sunlight Resistant").

Report Date: 1994-05-14

Last Revised: 2016-11-11

© 2022 UL LLC



©Halogen 有鹵

DRAW NO. PGAS042857

GJS

PLASTIC TOLERANCE:

$L \leq 10$	± 0.2
$10 < L \leq 30$	± 0.3
$30 < L \leq 50$	± 0.5
$50 < L \leq 100$	± 0.7
$100 < L \leq 250$	± 1.2
ABOVE 250	± 1.5


APPROVED BY *Steven* 2022.09.12

REVIEWED BY *Jaob* 2022.09.12

DRAWN BY *Henry* 2022.09.12

MATERIAL: PVC

COLOR: LIGHT BLUE



品固企業股份有限公司
品基電子(東莞)有限公司
蘇州品基電子科技有限公司
東莞市鈺隆商貿有限公司
鑽隆有限公司
PINGOOD ENTERPRISE CO.,LTD.

PART NAME:

保險絲蓋
FUSE COVER

A
SIZE


VERSION

1B

PART NO:

FH-1-UL

SHEET 1 OF 1



UNIT SCALE
mm

表單號碼 QF135