


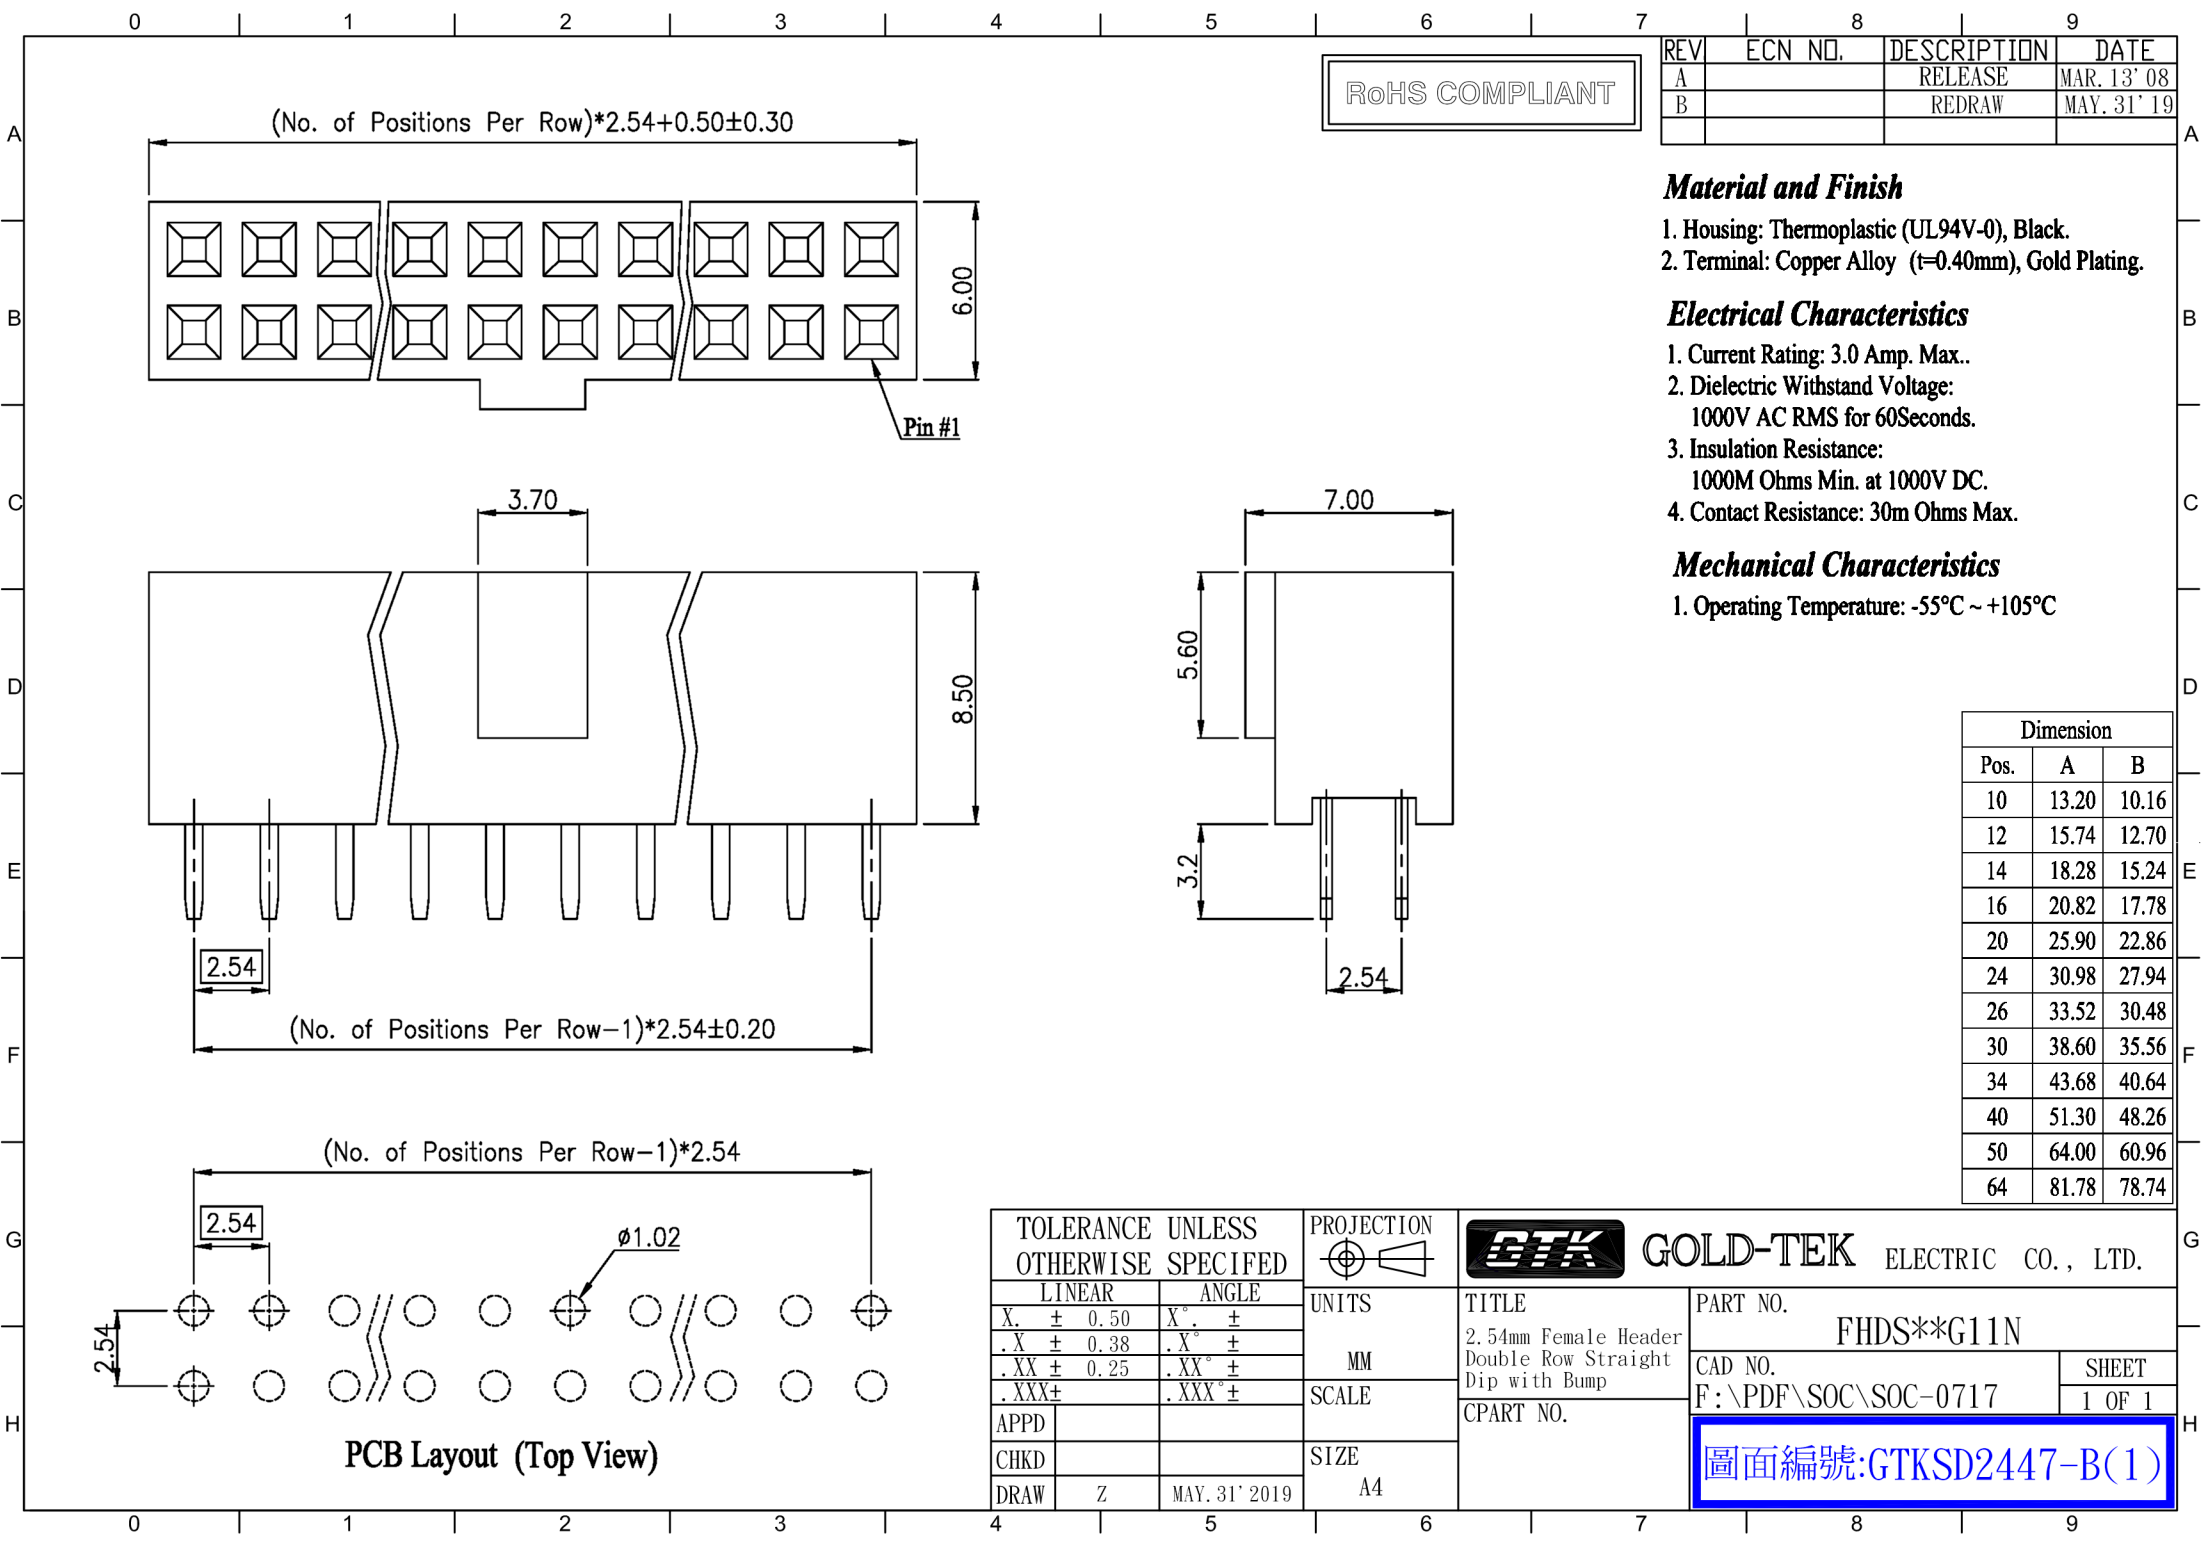

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	MAR. 13' 08
B		REDRAW	MAY. 31' 19

Material and Finish

1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.40mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Dimension		
Pos.	A	B
10	13.20	10.16
12	15.74	12.70
14	18.28	15.24
16	20.82	17.78
20	25.90	22.86
24	30.98	27.94
26	33.52	30.48
30	38.60	35.56
34	43.68	40.64
40	51.30	48.26
50	64.00	60.96
64	81.78	78.74

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	TITLE	
X. ± 0.50	X° ±		2.54mm Female Header	
.X ± 0.38	.X° ±		Double Row Straight	
.XX ± 0.25	.XX° ±		Dip with Bump	
.XXX±	.XXX° ±		CPART NO.	
APPD			PART NO.	
CHKD			FHDS**G11N	
DRAW	Z	MAY. 31' 2019	CAD NO.	
			F:\PDF\SOC\SOC-0717	
			SHEET	
			1 OF 1	

圖面編號:GTKSD2447-B(1)