


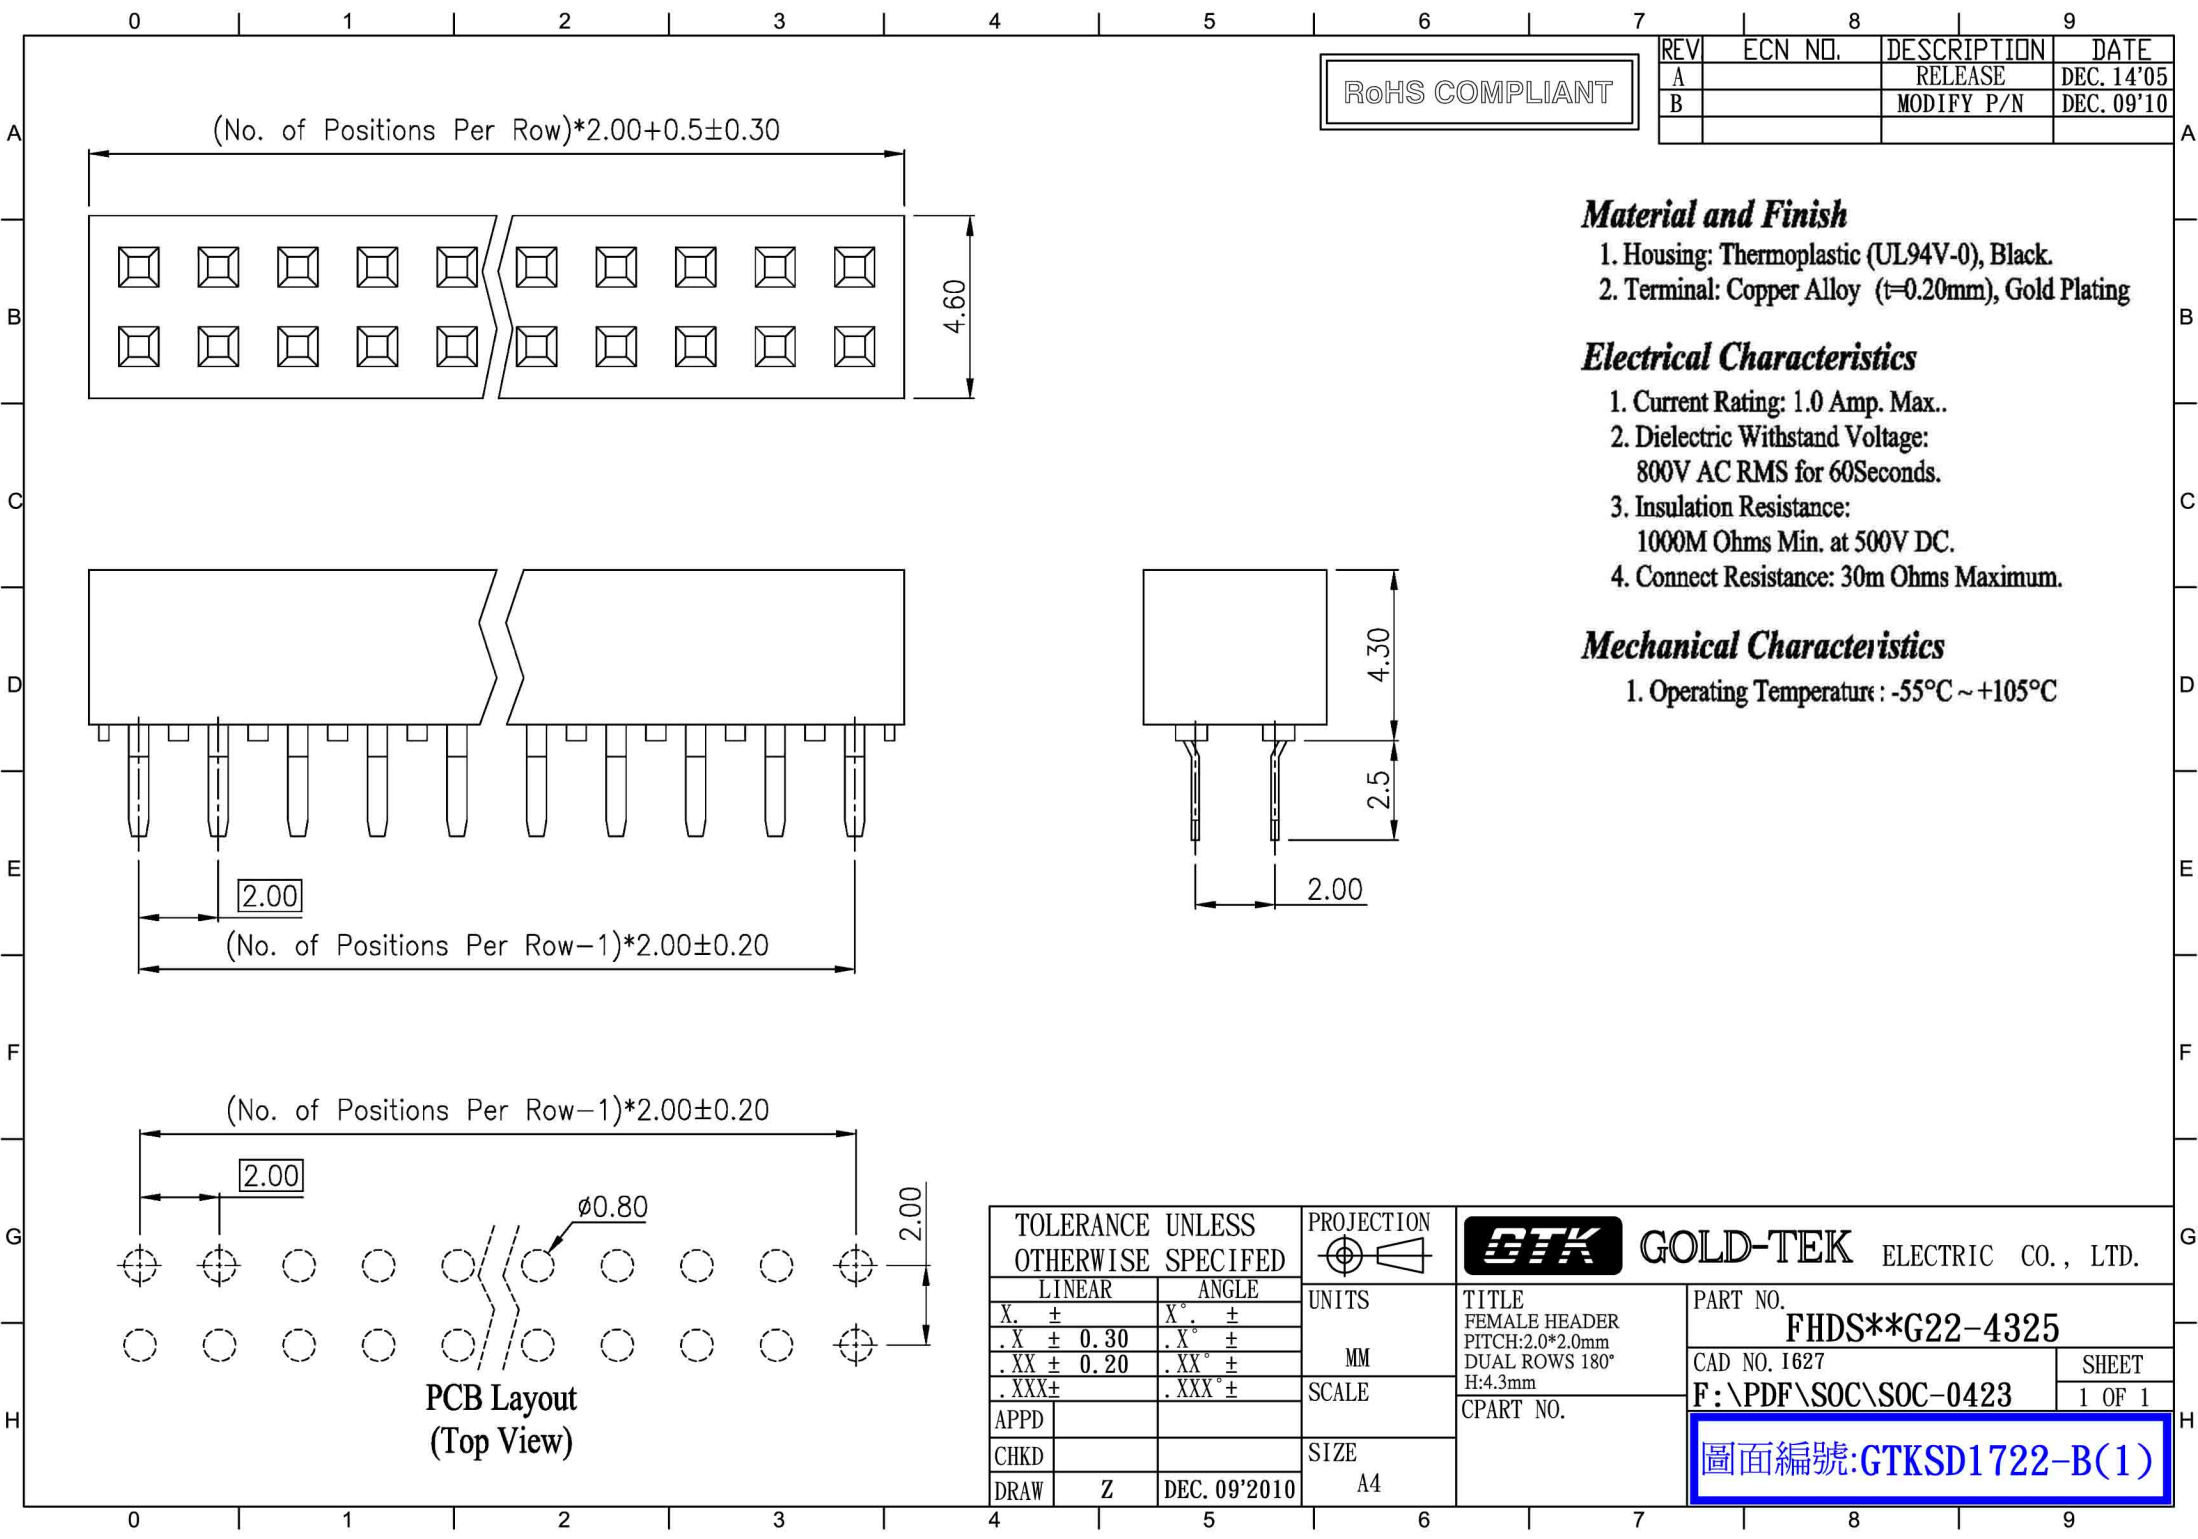

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 14'05
B		MODIFY P/N	DEC. 09'10

- Material and Finish**
- 1. Housing: Thermoplastic (UL94V-0), Black.
 - 2. Terminal: Copper Alloy ($t=0.20\text{mm}$), Gold Plating

- Electrical Characteristics**
- 1. Current Rating: 1.0 Amp. Max..
 - 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
 - 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
 - 4. Connect Resistance: 30m Ohms Maximum.

- Mechanical Characteristics**
- 1. Operating Temperature : $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	GOLD-TEK ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS	TITLE	
X. ±	X° ±	MM	FEMALE HEADER	
.X ± 0.30	.X° ±		PITCH:2.0*2.0mm	
.XX ± 0.20	.XX° ±		DUAL ROWS 180°	
.XXX ±	.XXX° ±	SCALE	H:4.3mm	
APPD		SIZE	CPART NO.	
CHKD		A4		
DRAW	Z	DEC. 09'2010		

PART NO. FHDS**G22-4325

CAD NO. I627

SHEET 1 OF 1

F:\PDF\SOC\SOC-0423

圖面編號:GTKSD1722-B(1)