





REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 14'05
B		MODIFY P/N	DEC. 09'10
C		MODIFY HOUSING	JUN. 24'16

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.20\text{mm}$), Gold Plating.

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 500V DC.
4. Connect Resistance: 30m Ohms Maximum.

1. Operating Temperature: -55°C ~ +105°C

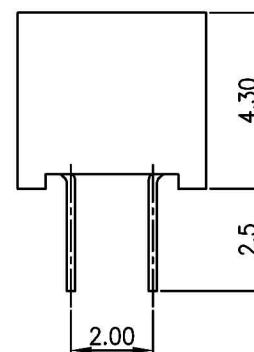

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION 	 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE	UNITS	TITLE FEMALE HEADER PITCH:2.0*2.0mm DUAL ROWS 180° H:4.3mm	PART NO. FHDS**G22-4325	
X. ±	X° ±	CAD NO. I627			SHEET	
.X ± 0.30	.X° ±	F:\PDF\SOC\SOC-0423			1 OF 1	
.XX ± 0.20	.XX° ±	圖面編號:GTKSD1722-C(1)				
.XXX±	.XXX° ±					
SCALE		MM	CPART NO.			
APPD			SIZE			
CHKD			A4			
DRAW		Z JUN. 24'2016				

圖面編號:GTKSD1722-C(1)