

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DES.14.05
B		REDRAWS	SEP.11.07
C		MODIFY P/N	SEP.26'11

Material and Finish




1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.20\text{mm}$), Gold Plating

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 500V DC.
4. Connect Resistance: 30m Ohms Maximum.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

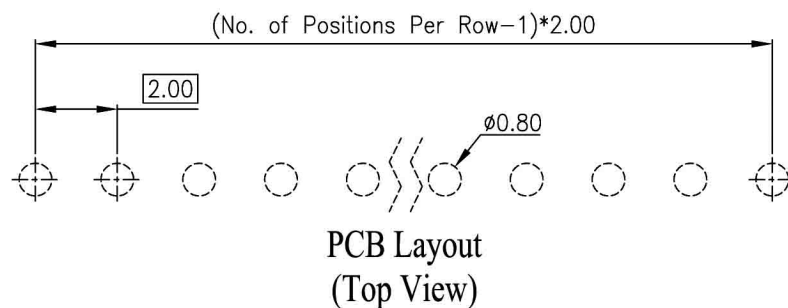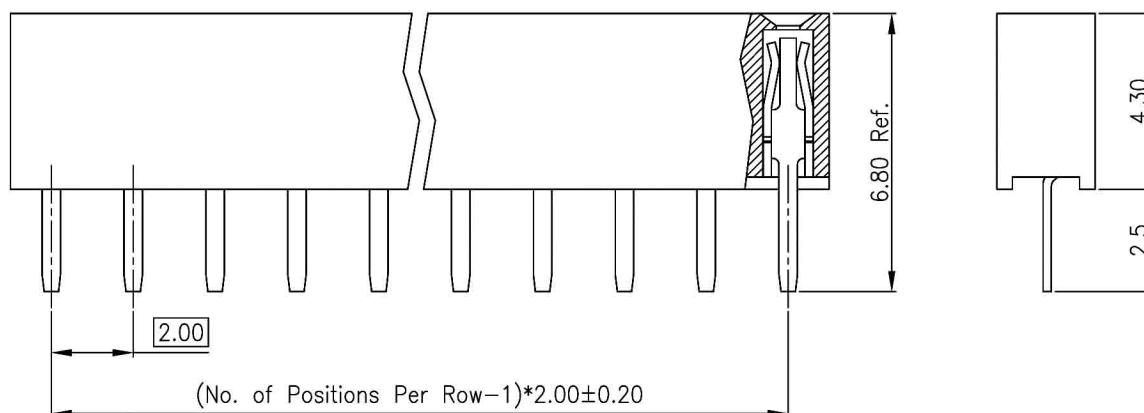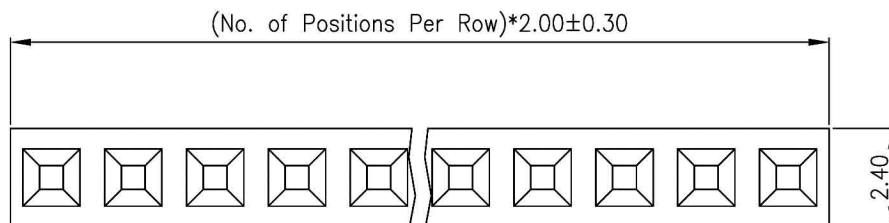

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ±	X° ±	
.X ± 0.3	.X° ±	
.XX ± 0.2	.XX° ±	
.XXX ± 0.1	.XXX° ±	
APPD		
CHKD		
DRAW	Z	SEP.26'2011

PROJECTION	
UNITS	MM
SCALE	
SIZE	A4

		GOLD-TEK ELECTRIC CO., LTD.	
TITLE FEMALE HEADER PITCH:2.0mm 180° SINGLE ROW H:4.3mm		PART NO. FHSS**G20-4325	
NO OF POSITION 2~40 PIN		CAD NO. I627 F:\PDF\SOC\SOC-0422	SHEET 1 OF 1
圖面編號:GTKSD1721-C(1)			