


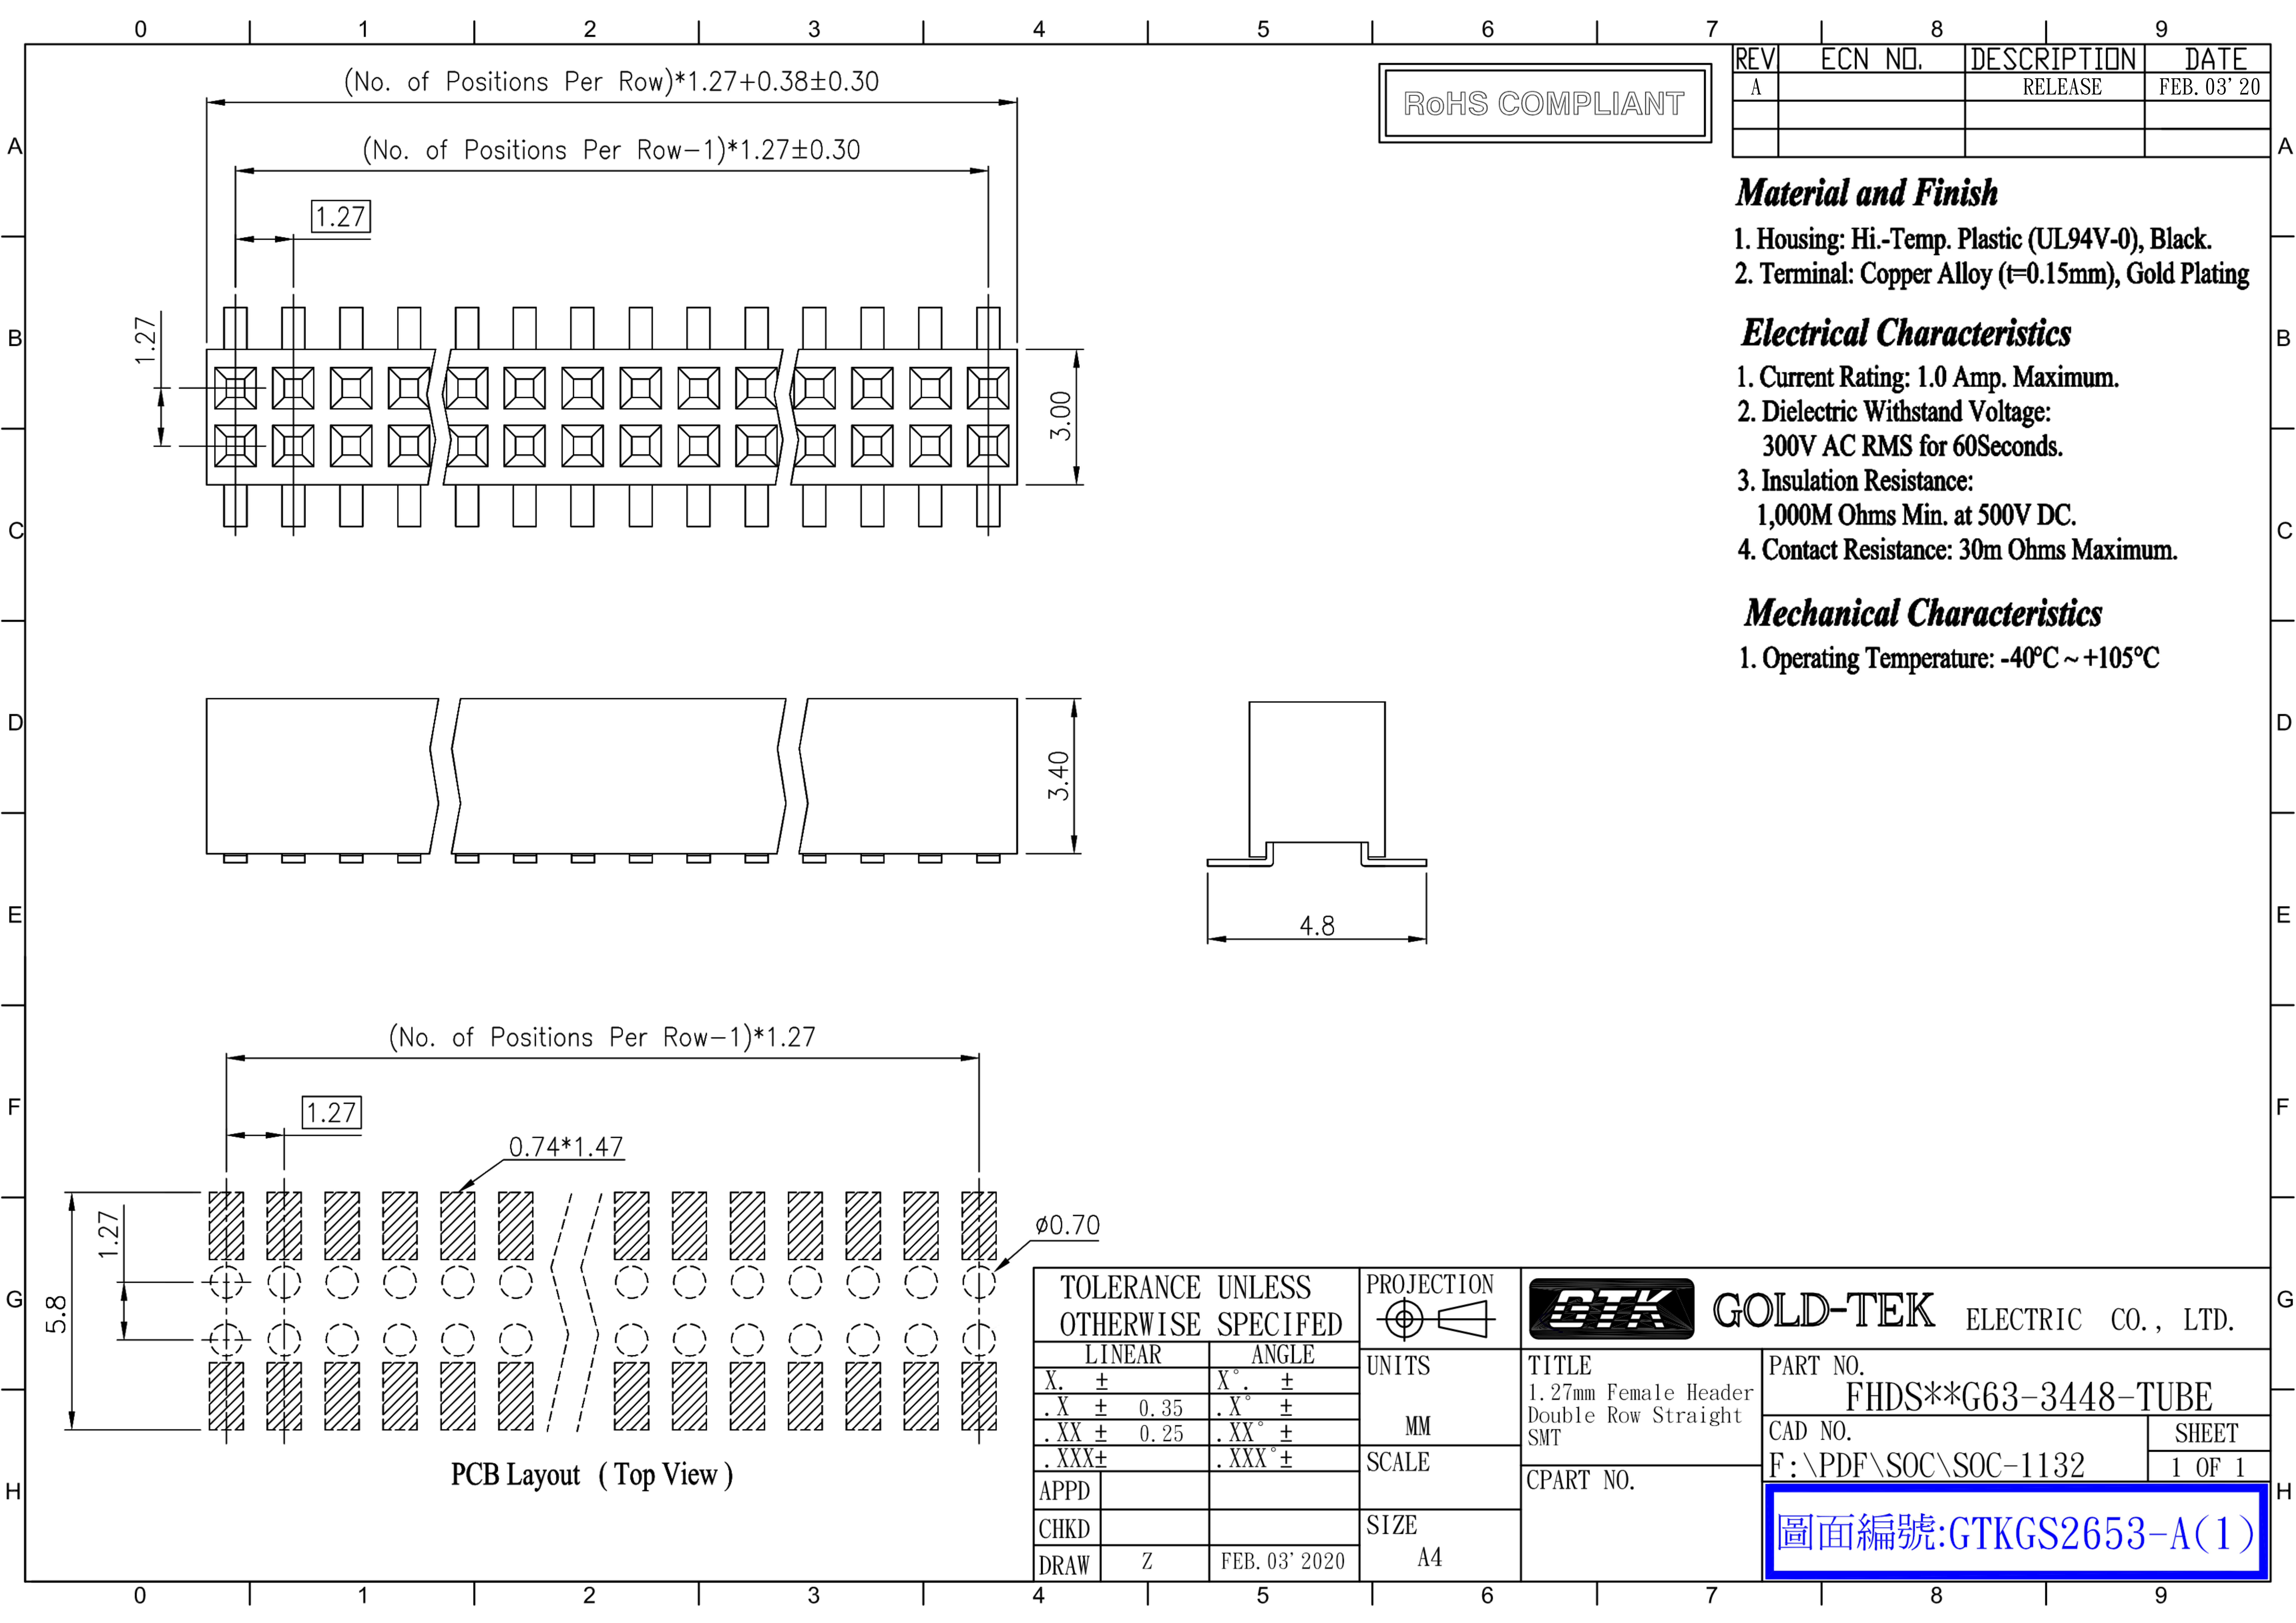

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	FEB. 03' 20

Material and Finish


- Housing: Hi.-Temp. Plastic (UL94V-0), Black.
- Terminal: Copper Alloy (t=0.15mm), Gold Plating

Electrical Characteristics

- Current Rating: 1.0 Amp. Maximum.
- Dielectric Withstand Voltage:
300V AC RMS for 60Seconds.
- Insulation Resistance:
1,000M Ohms Min. at 500V DC.
- Contact Resistance: 30m Ohms Maximum.

Mechanical Characteristics

- Operating Temperature: -40°C ~ +105°C

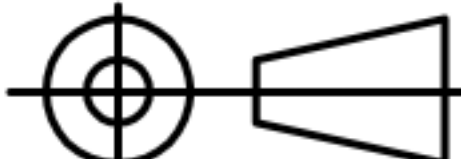TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION				 GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE		UNITS	TITLE 1.27mm Female Header Double Row Straight SMT	PART NO. FHDS**G63-3448-TUBE		
X. ±		X°. ±				MM	CAD NO. F:\PDF\SOC\SOC-1132	SHEET 1 OF 1
.X ± 0.35		.X° ±						
.XX ± 0.25		.XX° ±						
.XXX±		.XXX°±						
SCALE		SIZE		CPART NO.	圖面編號:GTKGS2653-A(1)			
APPD		A4						
CHKD								
DRAW		Z		FEB. 03' 2020				