



ROHS

Front

Side

Back

REV	DESCRIPTIONS	DATE
01	NEW	2021. 12. 13

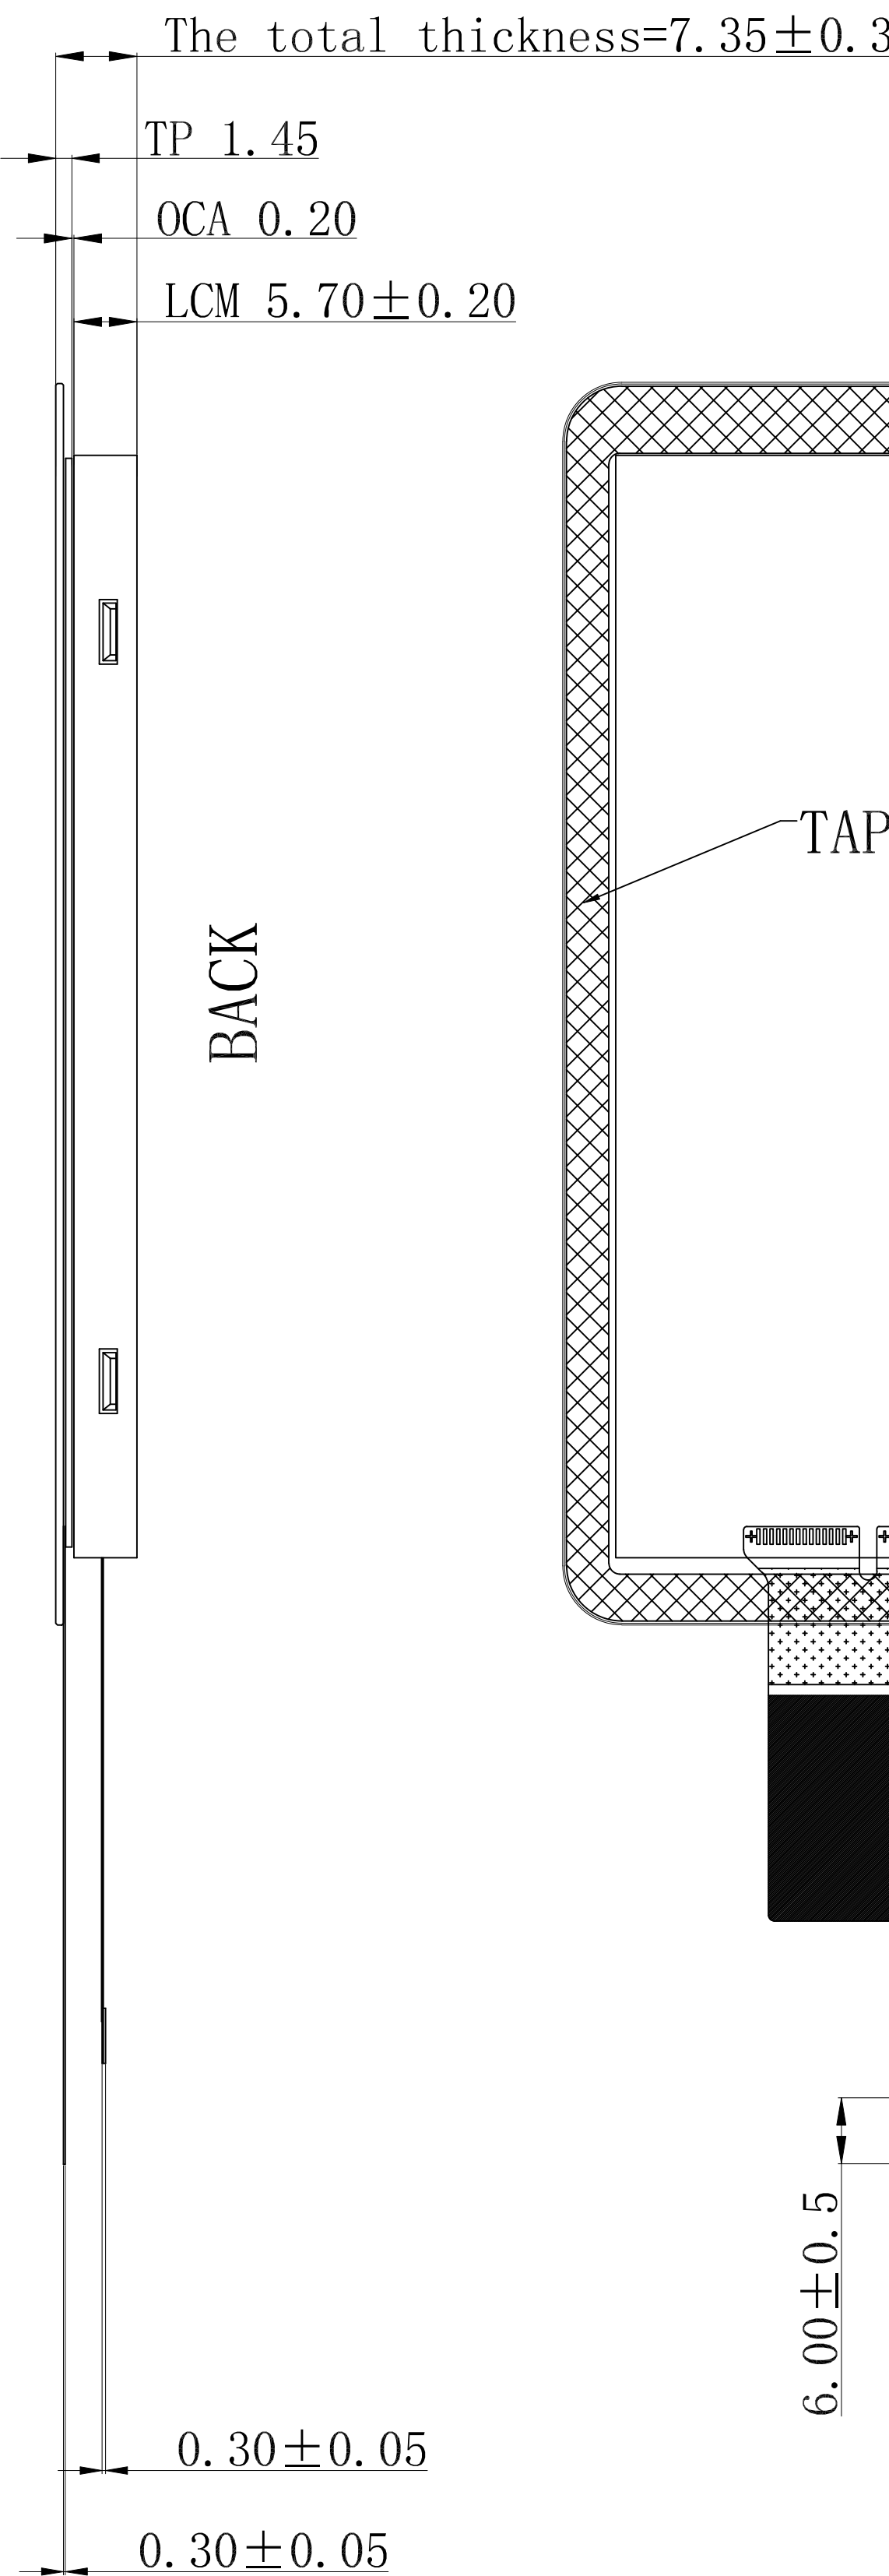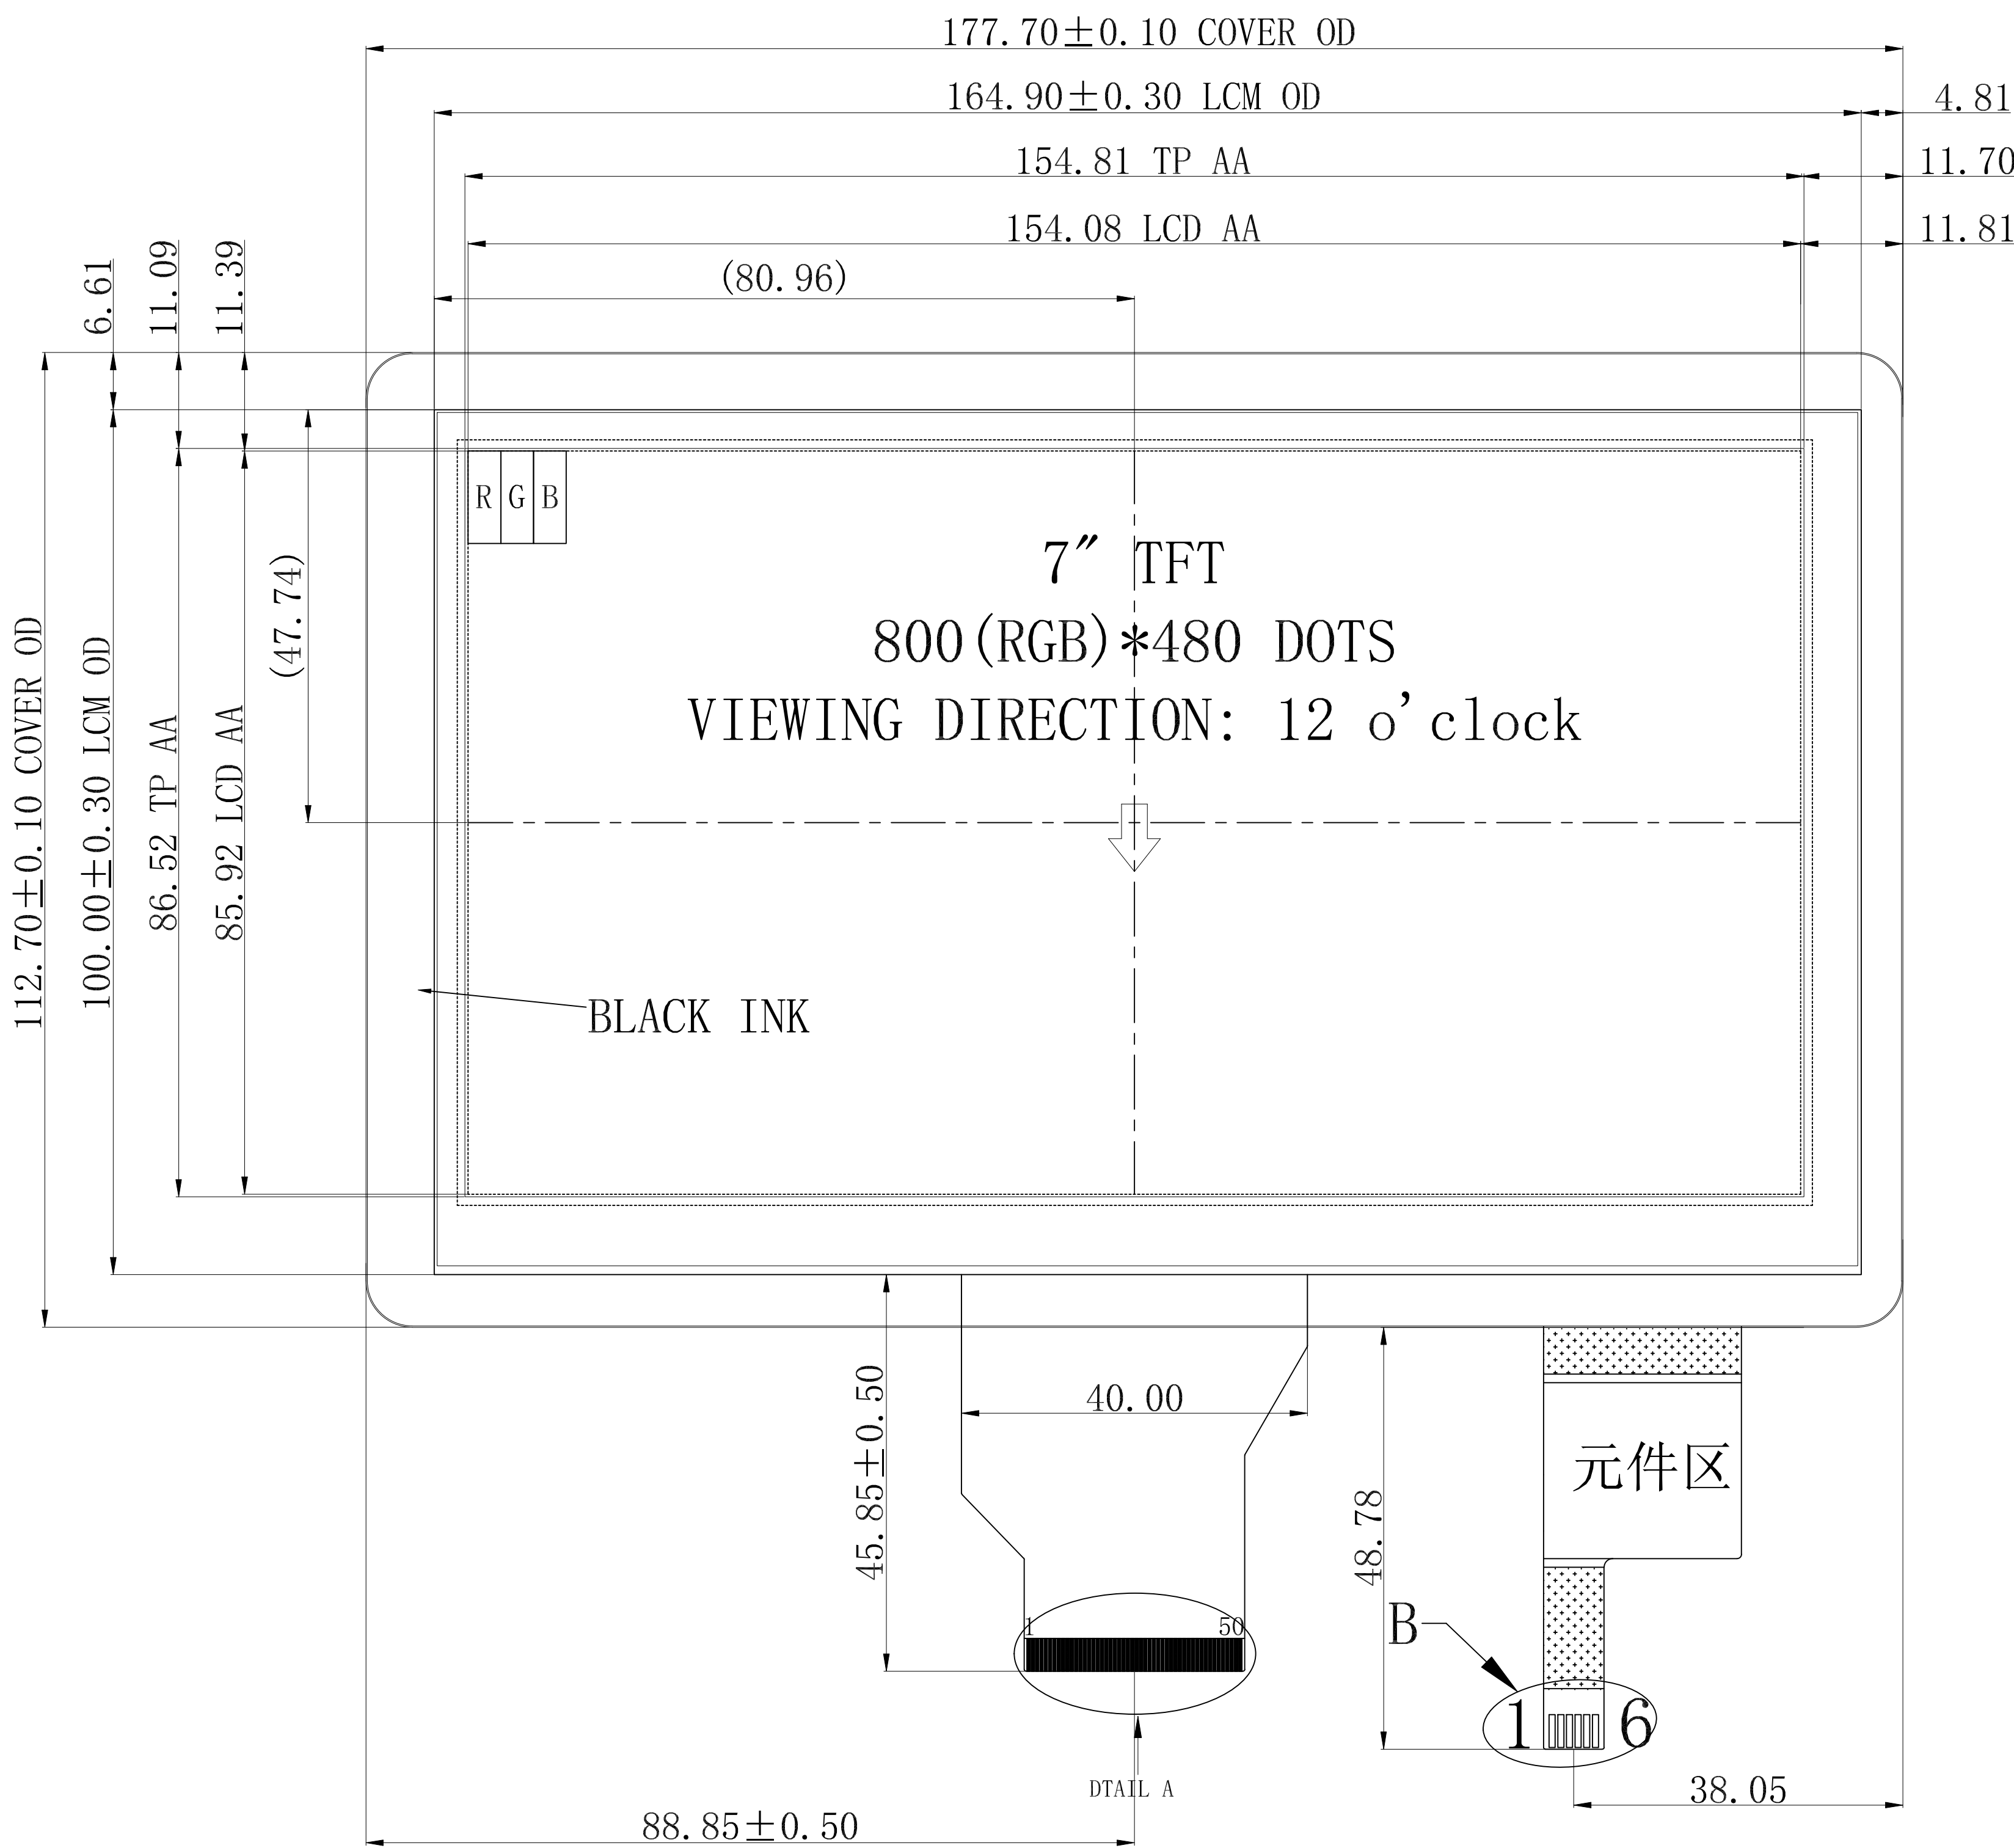


PIN	SYMBOL
1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	RO
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

TP逻辑图

TP	PIN	定义
1	RST	
2	INT	
3	VDD	
4	SDA	
5	SCL	
6	GND	



NOTES:

- 1.Display size:7.0" 800*480
- 2.Viewing direction:12 o'clock
- 3.Display mode:Transmissive/Normal white/Anti-glare
- 4.Operation temperature:-20°C~+70°C
- 5.Storage temperature:-30°C~+80°C
- 6.Touch IC:GT911
- 7.Unspecification tolerance are ±0.2mm

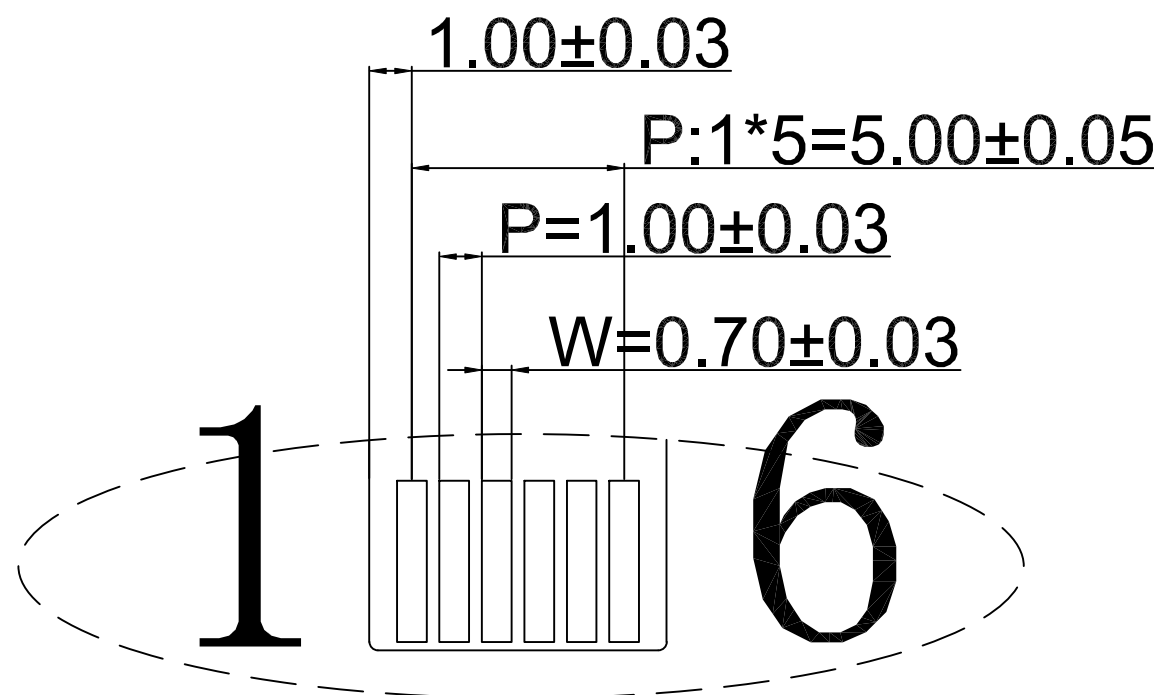

(3:1)
DETAIL B

LED CIRCUIT DIAGRAM:

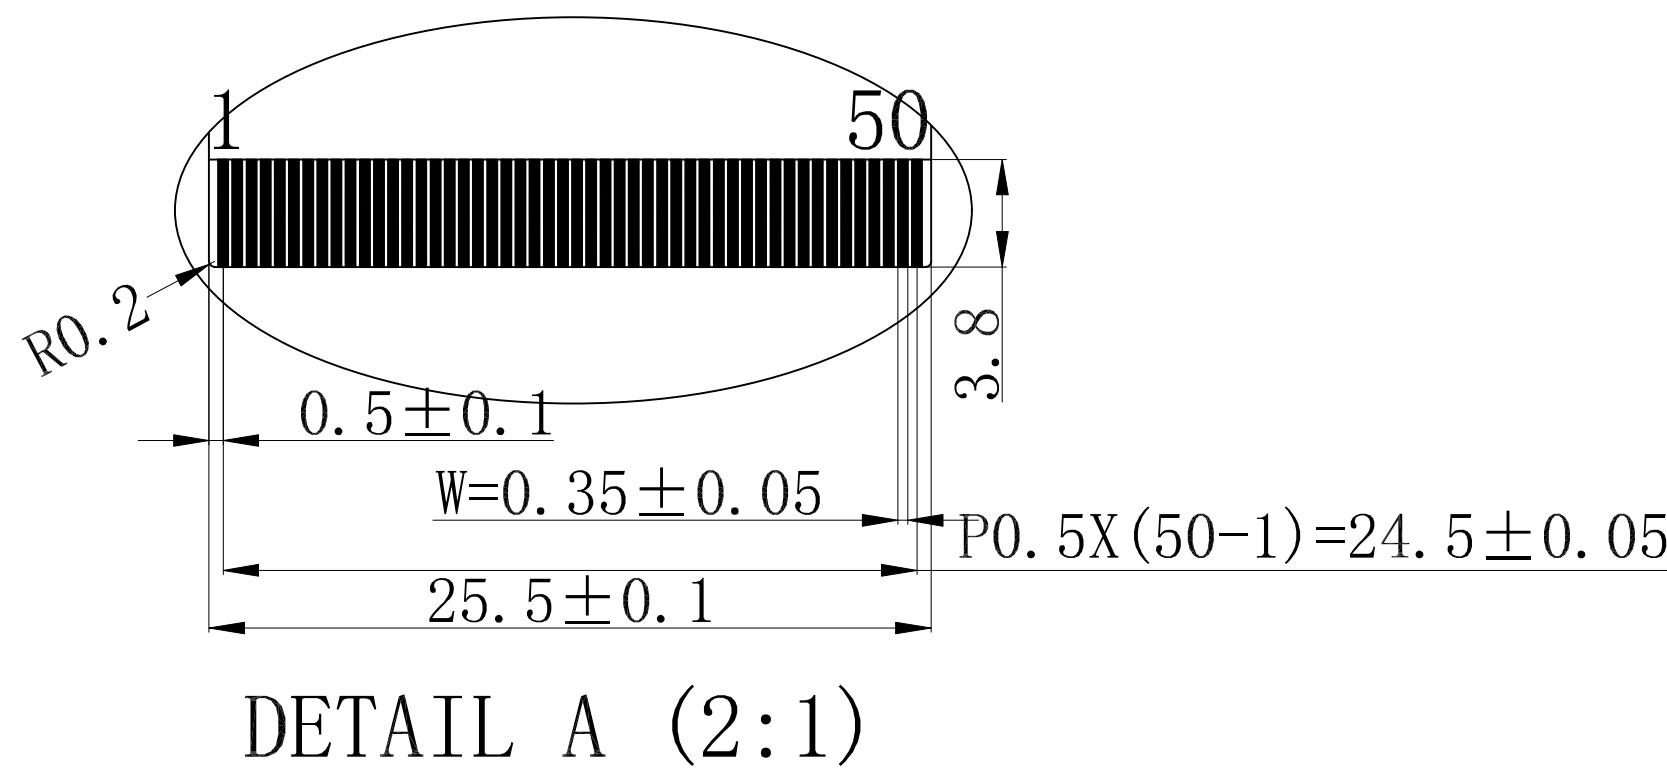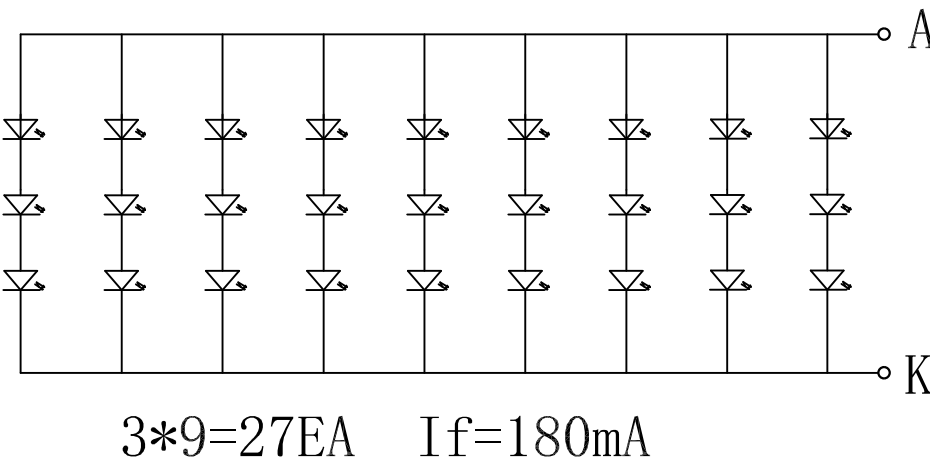

VERSION	DATE	TITLE:
01	2021.12.13	
SCALE	NO.	UNIT
1:1		mm
APPROVED	CHECKED	DRAWN
William	Bonnbi	Zane
FILE NAME:HC070TG45057-21V.CV01		