

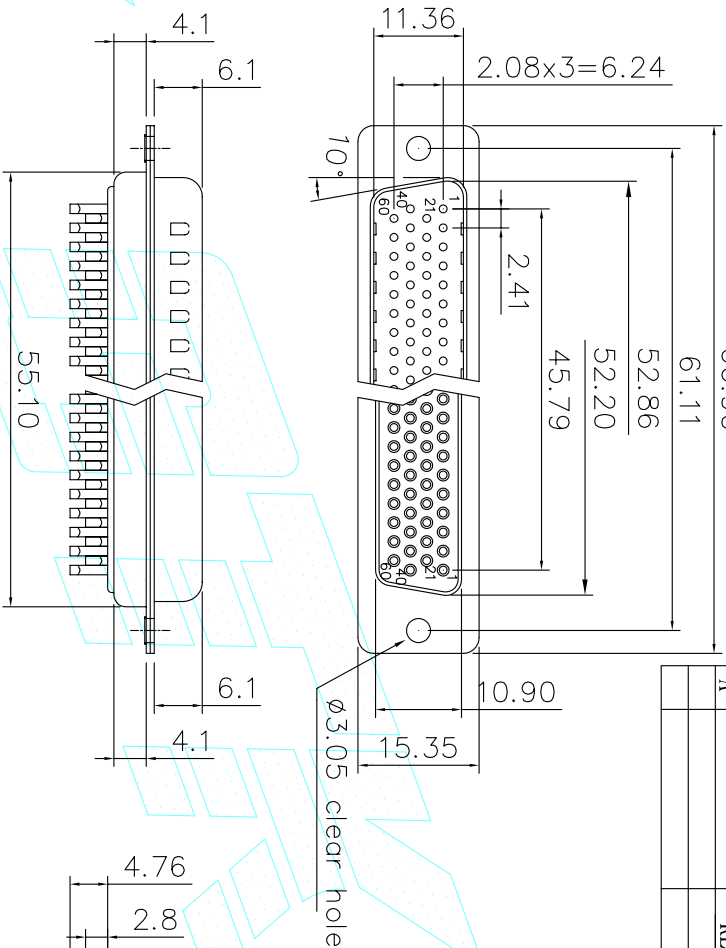

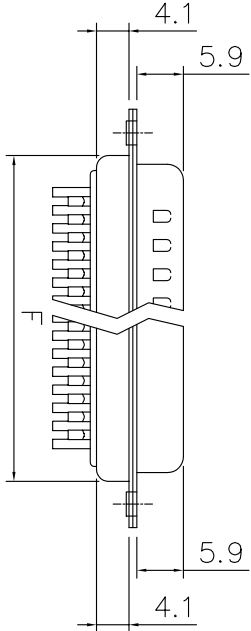


REV	ECN	NO.	DESCRIPTION	DATE
A			RELEASE	NOV. 03' 05

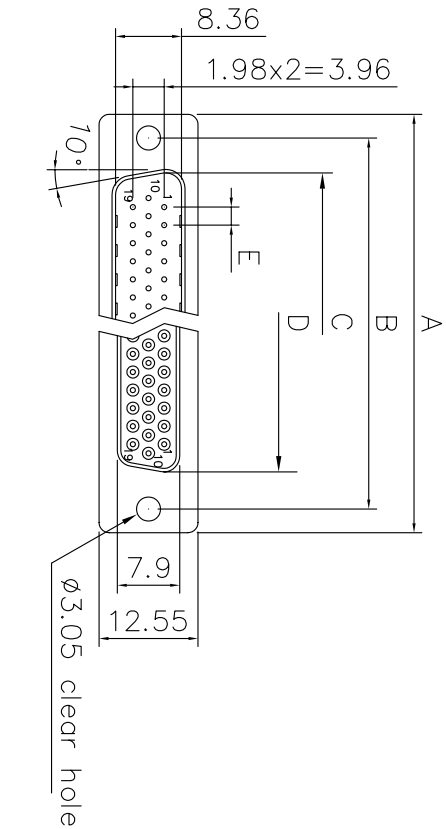

P/N: MALE=HDS**PTK1NS/RH
P/N: FEMALE=HDS**STK2NS/RH
15 ~ 62 Positions

P/N: MALE=HDS78PTK1NS/RH
P/N: FEMALE=HDS78STK2NS/RH
78 Positions

Dimensions

Note:
/RH=RoHS Compliant.

Positions	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.14	33.32	25.50	24.66	2.29	27.70
44	53.04	47.04	38.96	38.38	2.29	41.10
62	69.32	63.50	55.42	54.84	2.41	57.30

Product Specification

Material

Insulator :Glass-Filled Thermoplastic
PBT,UL94V-0 rated
Contact :Brass or Phosphor Bronze
Shell :Steel, 100u" Tin Over 50u" min
Nickel.
Clinch Nut: Brass, 100u" min Nickel
Plated.
Screwlock :Brass, 100u" min Nickel
Plated.

Electrical

Contact Resistance :20 milliohms
Max at 1 AMP DC.
Insulation Resistance 1000
megohms at 500 VDC
Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute
Current Rating :3 AMP
Voltage Rating :250 VAC/rms
60Hz

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	TITLE		PART NO.	
LINEAR	ANGLE	UNITS	HIGH DENSITY D-SUB SOLDER TYPE	CPART NO.	HDS**TK*NS/RH	
X ± 0.50	X° ±	MM				
X ± 0.38	X° ±	MM				
.XX ± 0.25	.XX° ±	MM				
.XXX ±	.XXX° ±	MM				
APPD		SCALE				
CHKD		SIZE				
DRAW		Z.				

GOLD-TEK ELECTRIC CO., LTD.

PART NO.

HDS**TK*NS/RH

CAD NO. 1268

F:\Dtw\DSUB\DSUB-0100

SHEET
1 OF 1

圖面編號:GTKSD1663-A(1)