


INL13-C14-DUAL-LOCK-H05-3100-200-R

(Standard C13 (IS-14N) to Dual lock C14 (SG03DC) H05VV-F 3x1.00mm2 : 2 meters fully red)

SAP No. 823938

Page 1 of 1		DRAWN 21.09.2023 BY JH		APPROVED 22.06.2023 BY ***	
STOCK CODE		CABLE REQUIREMENTS:		PLUG / END A REQUIREMENTS:	
D6A		Colour: RED (RAL3020)		Type: SG03DC	
PC3188		Type: 3 Core 1.00mm <sup>2</sup> H05VV-F (CB Approved)		Colour: RED (RAL3020)	
Barcode		Conductor Colour Codes:		Rating: 10A	
TBC		Earth (Green & Yellow)		Reference: C14 Dual Locking Connector (CB Approved)	
		Neutral (Blue)		CONNECTOR / END B REQUIREMENTS:	
		Live (Brown)		Type: IS-14N	
		Complete Powerlead Rated: 10A/250V		Colour: RED (RAL3020)	
				Rating: 10A	
				Reference: C13 IEC Connector (CB Approved)	

IEC  
LOCK

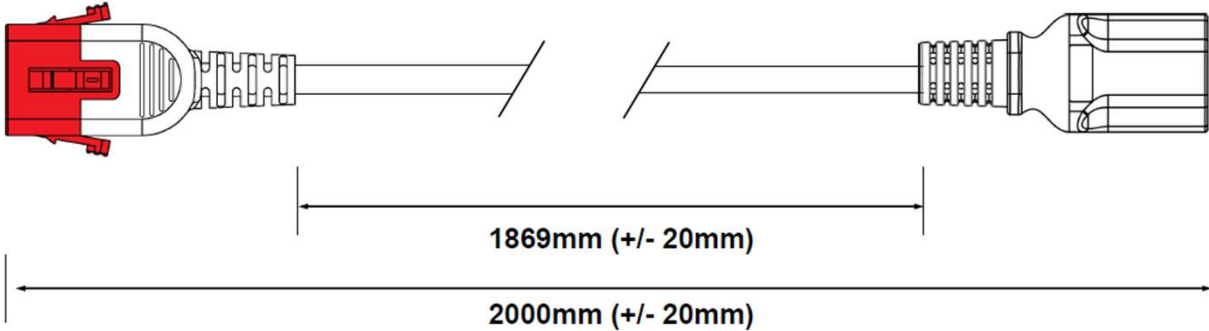

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:	HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTER .....TBC	Rev    Modification    Date    Name	<b>Fig.8</b> <b>(200mm)</b>	
PIN PROTECTING COVER .....NO	A		
WIRING INSTRUCTIONS .....NO	B		
PRE-SHIPMENT INSPECTION.....NO	C		
COMMENTS:	D		
	E		

Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL13-C14-DUAL-LOCK-H05-3100-200-B

(Standard C13 (IS-14N) to Dual lock C14 (SG03DC) H05VV-F 3x1.00mm2 : 2 meters fully blue)

SAP No. 823939

Page 1 of 1		DRAWN 21.09.2023 BY JH	APPROVED 22.06.2023 BY ***	
STOCK CODE  <b>PC3189</b>  Barcode <b>TBC</b>	<b>D6A</b>	<b>CABLE REQUIREMENTS:</b> Colour: BLUE (RAL5015) Type: 3 Core 1.00mm <sup>2</sup> H05VV-F (CB Approved) Conductor Colour Codes: Earth (Green & Yellow) Neutral (Blue) Live (Brown)	<b>PLUG / END A REQUIREMENTS:</b> Type: SG03DC Colour: BLUE (RAL5015) RED LATCH Rating: 10A Reference: C14 Dual Locking Connector (CB Approved)	<b>CONNECTOR / END B REQUIREMENTS:</b> Type: IS-14N Colour: BLUE (RAL5015) Rating: 10A Reference: C13 IEC Connector (CB Approved)
	Complete Powerlead Rated: 10A/250V			

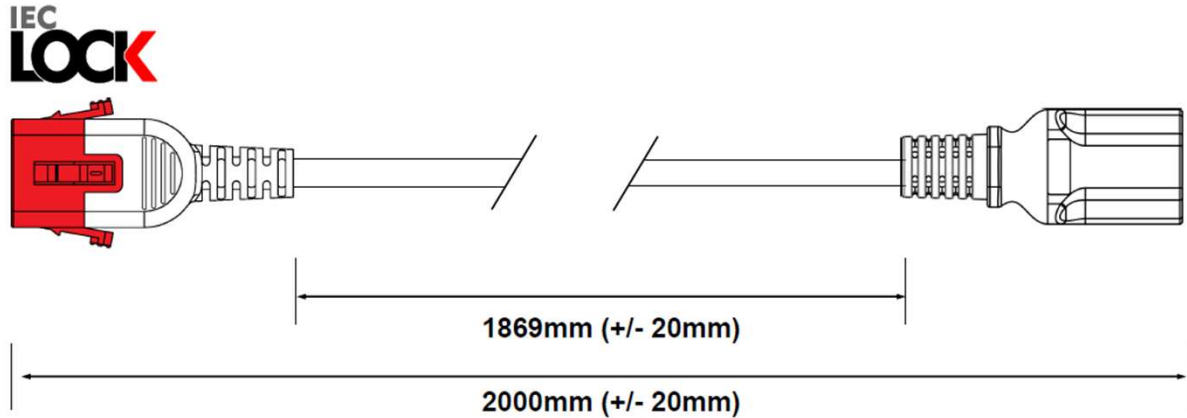

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:		HANKING	TERMINATIONS / FURTHER COMMENTS:
	Rev	Modification	Date	Name
PACKAGING OUTER .....TBC	A			
PIN PROTECTING COVER .....NO	B			
WIRING INSTRUCTIONS .....NO	C			
PRE-SHIPMENT INSPECTION.....NO	D			
COMMENTS:	E			


Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL13-C14-DUAL-LOCK-H05-  
3100-300-R

(Standard C13 (IS-14N) to Dual  
lock C14 (SG03DC) H05VV-F  
3x1.00mm<sup>2</sup> : 3 meters fully red)

SAP No. 823940

Page 1 of 1		DRAWN 21.09.2023 BY JH	APPROVED 22.06.2023 BY ***
STOCK CODE <b>PC3191</b> Barcode <b>TBC</b>	<b>D6A</b> <b>CABLE REQUIREMENTS:</b> Colour: RED (RAL3020) Type: 3 Core 1.00mm <sup>2</sup> H05VV-F (CB Approved) Conductor Colour Codes: Earth (Green & Yellow) Neutral (Blue) Live (Brown)  Complete Powerlead Rated: 10A/250V	<b>PLUG / END A REQUIREMENTS:</b> Type: SG03DC Colour: RED (RAL3020) Rating: 10A Reference: C14 Dual Locking Connector (CB Approved)	<b>CONNECTOR / END B REQUIREMENTS:</b> Type: IS-14N Colour: RED (RAL3020) Rating: 10A Reference: C13 IEC Connector (CB Approved)

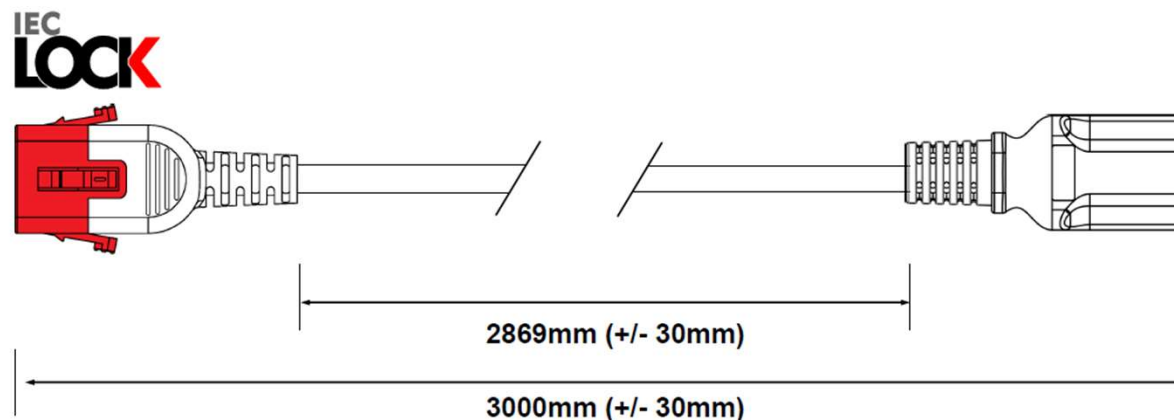

<b>EXTRA REQUIREMENTS:</b> PACKAGING OUTER .....TBC PIN PROTECTING COVER .....NO WIRING INSTRUCTIONS .....NO PRE-SHIPMENT INSPECTION.....NO COMMENTS:	<b>CHANGE MANAGEMENT:</b> Rev Modification Date Name A B C D E	<b>HANKING</b> <b>Fig.8</b> <b>(200mm)</b>	<b>TERMINATIONS / FURTHER COMMENTS:</b>
--	--	--	---

Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL13-C14-DUAL-LOCK-H05-3100-300-B

(Standard C13 (IS-14N) to Dual lock C14 (SG03DC) H05VV-F 3x1.00mm2 : 3 meters fully blue)

SAP No. 823941

Page 1 of 1		DRAWN 21.09.2023 BY JH		APPROVED 22.06.2023 BY ***	
STOCK CODE		CABLE REQUIREMENTS:		PLUG / END A REQUIREMENTS:	
D6A		Colour: BLUE (RAL5015)		Type: SG03DC	
PC3190		Type: 3 Core 1.00mm <sup>2</sup> H05VV-F (CB Approved)		Colour: BLUE (RAL5015) RED LATCH	
Barcode		Conductor Colour Codes:		Rating: 10A	
TBC		Earth (Green & Yellow)		Reference: C14 Dual Locking Connector (CB Approved)	
		Neutral (Blue)		CONNECTOR / END B REQUIREMENTS:	
		Live (Brown)		Type: IS-14N	
		Complete Powerlead Rated: 10A/250V		Colour: BLUE (RAL5015)	
				Rating: 10A	
				Reference: C13 IEC Connector (CB Approved)	

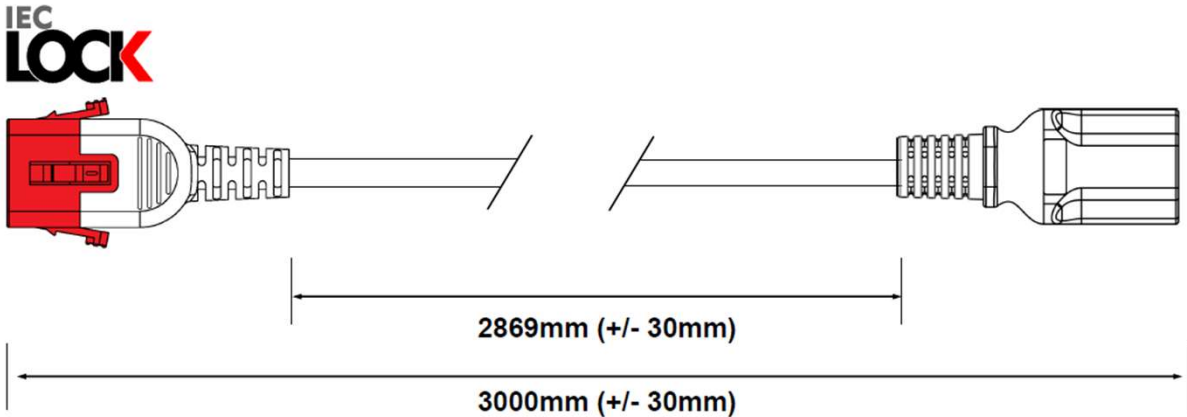

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:		HANKING	TERMINATIONS / FURTHER COMMENTS:
	Rev	Modification	Date	Name
PACKAGING OUTER .....TBC	A			
PIN PROTECTING COVER .....NO	B			
WIRING INSTRUCTIONS .....NO	C			
PRE-SHIPMENT INSPECTION.....NO	D			
COMMENTS:	E			
		Fig.8 (200mm)		




Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL19-C20-DUAL-LOCK-H05-  
3150-200-R

(Standard C19 (IS-16) to dual  
lock C20 (SG03MC) H05VV-F  
3x1.5mm<sup>2</sup> : 2 meters fully red)

SAP No. 823942

Page 1 of 1		DRAWN 21.09.2023 BY JH	APPROVED 22.06.2023 BY ***	
STOCK CODE	D6A	CABLE REQUIREMENTS:	PLUG / END A REQUIREMENTS:	CONNECTOR / END B REQUIREMENTS:
<b>PC3195</b>		Colour: RED (RAL3020)	Type: SG03MC	Type: IS-16
		Type: 3 Core 1.50mm <sup>2</sup> H05VV-F (CB Approved)	Colour: RED (RAL3020)	Colour: RED (RAL3020)
Barcode	TBC	Conductor Colour Codes: Earth (Green & Yellow)  Neutral (Blue)  Live (Brown) 	Rating: 16A	Rating: 16A
		Complete Powerlead Rated: 16A/250V	Reference: C20 Dual Locking Connector (CB Approved)	Reference: C19 IEC Connector (CB Approved)

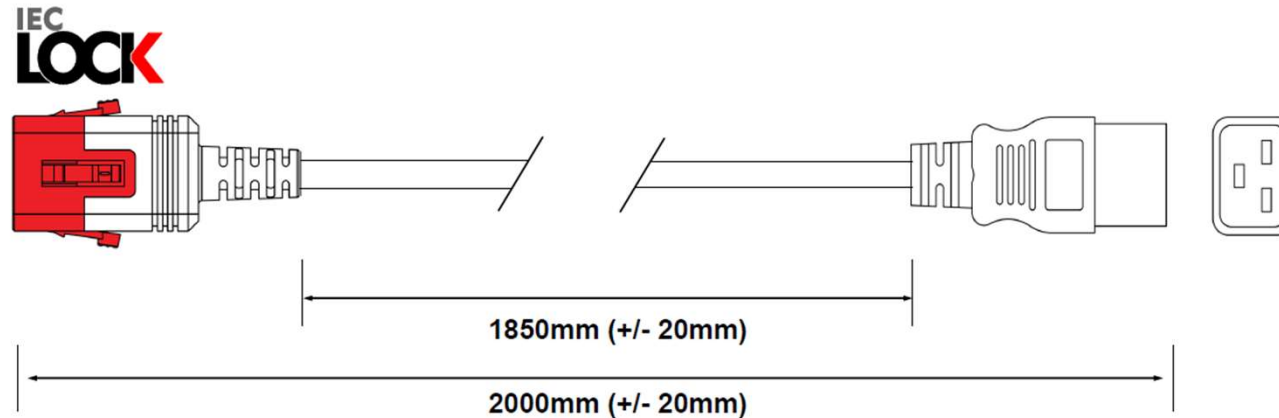

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:	HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTER .....TBC	Rev    Modification    Date    Name	<b>Fig.8</b> <b>(200mm)</b>	
PIN PROTECTING COVER .....NO	A		
WIRING INSTRUCTIONS .....NO	B		
PRE-SHIPMENT INSPECTION.....NO	C		
COMMENTS:	D		
	E		




Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL19-C20-DUAL-LOCK-H05-3150-200-B

(Standard C19 (IS-16) to dual lock C20 (SG03MC) H05VV-F 3x1.5mm<sup>2</sup> : 2 meters fully blue)

SAP No. 823943

Page 1 of 1		DRAWN 21.09.2023 BY JH		APPROVED 22.06.2023 BY ***	
STOCK CODE		CABLE REQUIREMENTS:		PLUG / END A REQUIREMENTS:	
<div>D6A</div> <div>PC3194</div> <div>Barcode</div> <div>TBC</div>		<div>Colour: BLUE (RAL5015)</div> <div>Type: 3 Core 1.00mm<sup>2</sup> H05VV-F (CB Approved)</div> <div>Conductor Colour Codes:</div> <div>Earth (Green &amp; Yellow) </div> <div>Neutral (Blue) </div> <div>Live (Brown) </div> <div>Complete Powerlead Rated: 16A/250V</div>		<div>Type: SG03MC</div> <div>Colour: BLUE (RAL5015) RED LATCH</div> <div>Rating: 16A</div> <div>Reference: C20 Dual Locking Connector (CB Approved)</div>	
				CONNECTOR / END B REQUIREMENTS:	
				<div>Type: IS-16</div> <div>Colour: BLUE (RAL5015)</div> <div>Rating: 16A</div> <div>Reference: C19 IEC Connector (CB Approved)</div>	

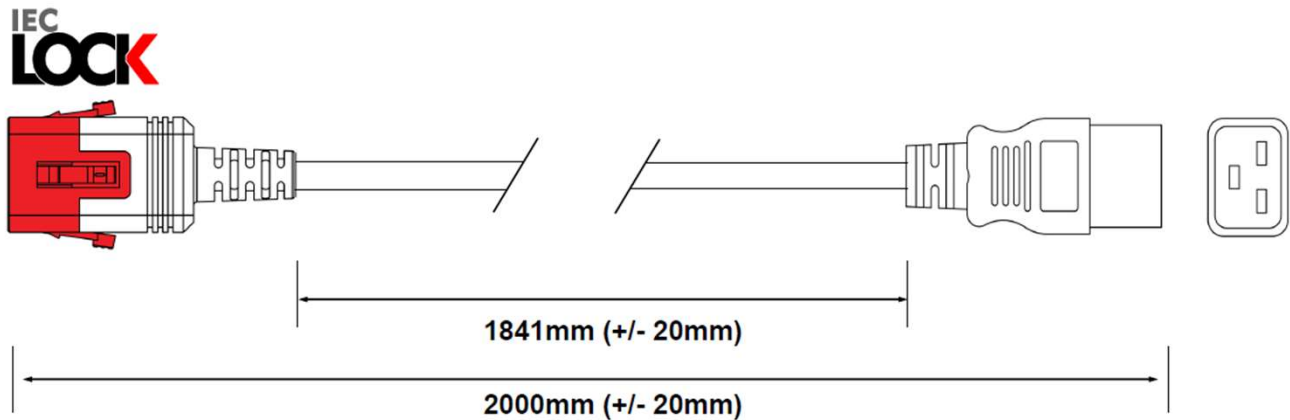

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:	HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTER .....TBC	Rev Modification Date Name	Fig.8 (200mm)	
PIN PROTECTING COVER .....NO	A		
WIRING INSTRUCTIONS .....NO	B		
PRE-SHIPMENT INSPECTION.....NO	C		
COMMENTS:	D		
	E		

Errors & Omissions excluded. Specification may be subject to change without notice.

Rev 5.0




**INL19-C20-DUAL-LOCK-H05-  
3150-300-R**

(Standard C19 (IS-16) to dual  
lock C20 (SG03MC) H05VV-F  
3x1.5mm<sup>2</sup> : 3 meters fully red)

SAP No. 823944

Page 1 of 1		DRAWN 21.09.2023 BY JH	APPROVED 22.06.2023 BY ***	
STOCK CODE <b>PC3192</b> Barcode <b>TBC</b>	<b>D6A</b>	<b>CABLE REQUIREMENTS:</b> Colour: RED (RAL3020) Type: 3 Core 1.50mm <sup>2</sup> H05VV-F (CB Approved) Conductor Colour Codes: Earth (Green & Yellow) Neutral (Blue) Live (Brown)	<b>PLUG / END A REQUIREMENTS:</b> Type: SG03MC Colour: RED (RAL3020) Rating: 16A Reference: C20 Dual Locking Connector (CB Approved)	<b>CONNECTOR / END B REQUIREMENTS:</b> Type: IS-16 Colour: RED (RAL3020) Rating: 16A Reference: C19 IEC Connector (CB Approved)
	Complete Powerlead Rated: 16A/250V			

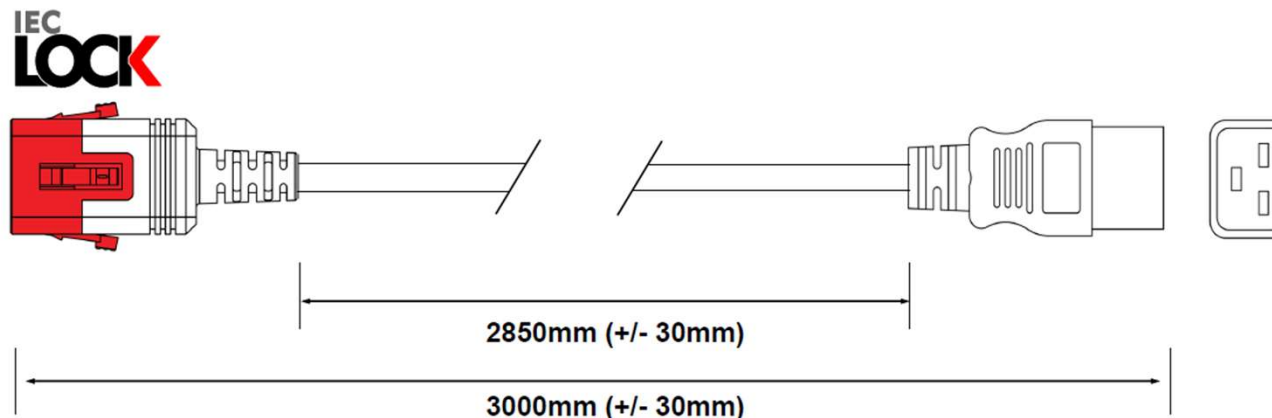

<b>EXTRA REQUIREMENTS:</b> PACKAGING OUTER .....TBC PIN PROTECTING COVER .....NO WIRING INSTRUCTIONS .....NO PRE-SHIPMENT INSPECTION.....NO COMMENTS:	<b>CHANGE MANAGEMENT:</b> Rev    Modification    Date    Name A B C D E	<b>HANKING</b>  <b>Fig.8 (200mm)</b>	<b>TERMINATIONS / FURTHER COMMENTS:</b>
--	---	--	---

Errors & Omissions excluded. Specification may be subject to change without notice.


Rev 5.0

INL19-C20-DUAL-LOCK-H05-3150-300-B

(Standard C19 (IS-16) to dual lock C20 (SG03MC) H05VV-F 3x1.5mm2 : 3 meters fully blue)

SAP No. 823945

Page 1 of 1		DRAWN 21.09.2023 BY JH		APPROVED 22.06.2023 BY ***	
STOCK CODE		CABLE REQUIREMENTS:		PLUG / END A REQUIREMENTS:	
D6A		Colour: BLUE (RAL5015)		Type: SG03MC	
PC3193		Type: 3 Core 1.50mm <sup>2</sup> H05VV-F (CB Approved)		Colour: BLUE (RAL5015) RED LATCH	
Barcode		Conductor Colour Codes:		Rating: 16A	
TBC		Earth (Green & Yellow)		Reference: C20 Dual Locking Connector (CB Approved)	
		Neutral (Blue)		CONNECTOR / END B REQUIREMENTS:	
		Live (Brown)		Type: IS-16	
		Complete Powerlead Rated: 16A/250V		Colour: BLUE (RAL5015)	
				Rating: 16A	
				Reference: C19 IEC Connector (CB Approved)	

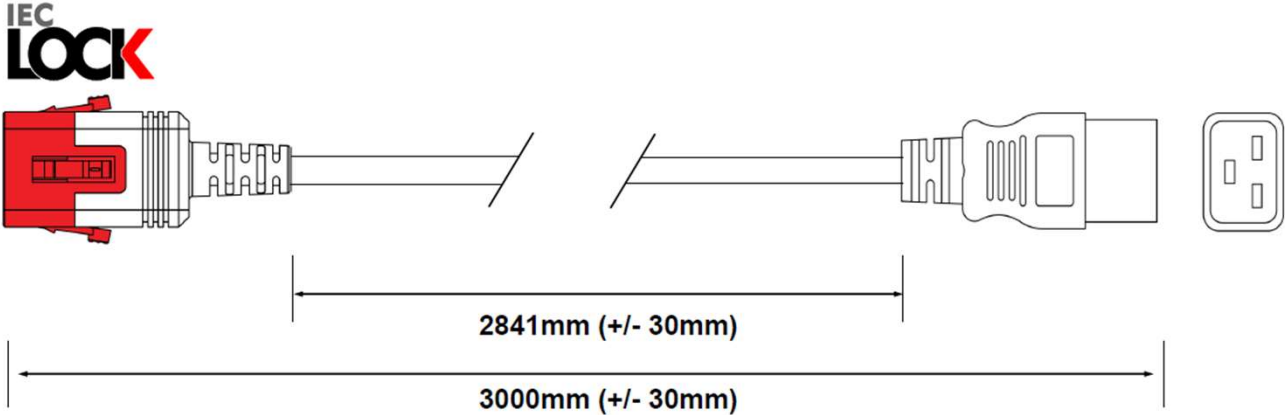

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:	HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTER .....TBC	Rev Modification Date Name	Fig.8 (200mm)	
PIN PROTECTING COVER .....NO	A		
WIRING INSTRUCTIONS .....NO	B		
PRE-SHIPMENT INSPECTION.....NO	C		
COMMENTS:	D		
	E		

Errors & Omissions excluded. Specification may be subject to change without notice.

Rev 5.0