
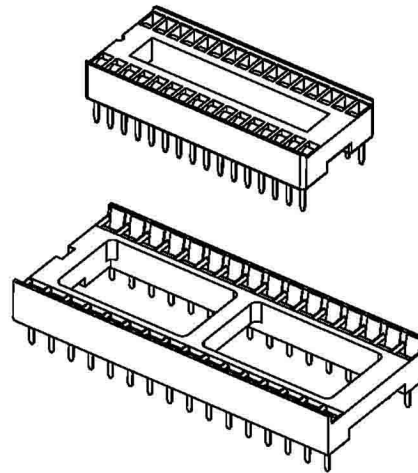


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 04'09
B		MODIFY P/N	DEC. 08'10

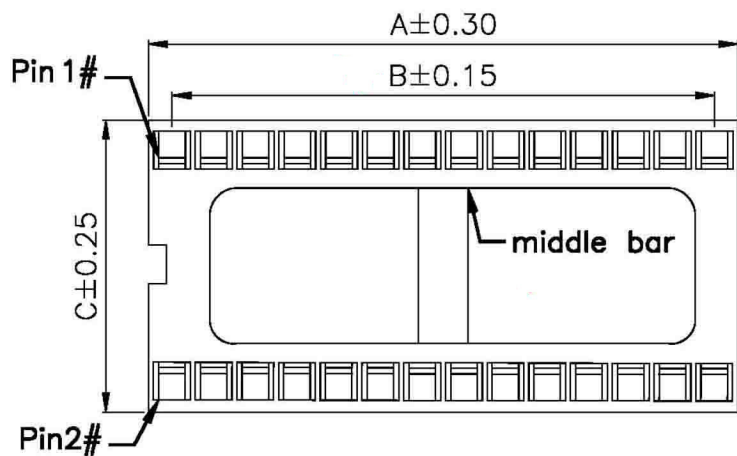

Specifications:

Current rating: 1.0A AC, DC

Voltage rating: 250V AC, DC

Contact resistance: 15m ohm max

Insulator resistance: 5000M ohm min

Dielectric withstanding voltage: 1000V AC/minute

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Material:

Insulator: High Temp. Plastic (PBT UL 94V-0)

Standard Color: Black

Contacts: Copper Alloy

Finish: Tin Plated

ISS ** T1 - **

Spacing:



03=7.62mm

04=10.16mm

06=15.24mm


No. of contact:

6 ~ 48 Pin

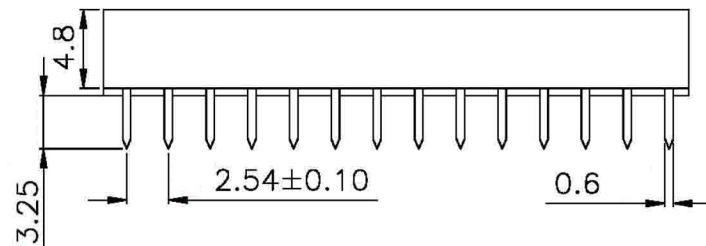

Dimension:

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing
6	7.62	5.08	10.16	7.62	03	22	27.94	25.40	12.70	10.16	04
8	10.16	7.62	10.16	7.62		24	30.48	27.94	17.78	15.24	06
14	17.78	15.24	10.16	7.62		28	35.56	33.02	17.78	15.24	
16	20.32	17.78	10.16	7.62		32	40.64	38.10	17.78	15.24	
18	22.86	20.32	10.16	7.62		40	50.80	48.26	17.78	15.24	
20	25.40	22.86	10.16	7.62		42	53.34	50.80	17.78	15.24	
24	30.48	27.94	10.16	7.62		48	60.96	58.42	17.78	15.24	
28	35.56	33.02	10.16	7.62							

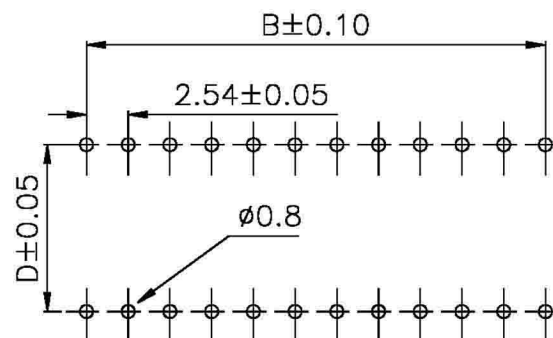

PCB LAYOUT

Note1: W/O middle bar(6~20P)
With middle bar(22~48P)

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR

X. $\pm$.X ± 0.25 .XX ± 0.15 .XXX $\pm$

APPD

CHKD

DRAW Z

X° $\pm$.X° $\pm$.XX° $\pm$.XXX° $\pm$

DEC. 08'2010

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.54MM IC SOCKET
STAMP PIN

CPART NO.

PART NO.

ISS**T1-**

CAD NO. 1399

F:\PDF\SOC\SOC-0810

SHEET

1 OF 1

圖面編號:GTKSD2719-B(1)