


THREE TERMINAL POSITIVE VOLTAGE REGULATORS
5V, 6V, 7V, 8V, 9V, 10V, 12V, 13V, 15V, 18V, 20V, 24V.

FEATURES


- Suitable for C-MOS, TTL, DTL, HTL Power Supply.
- Internal Short-Circuit Current Limiting.
- Internal Thermal Overload Protection.
- Maximum Output Current of 150mA ($T_j=25^{\circ}\text{C}$).
- Packaged in TO-92L.

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	V_{IN}	35	V
		40	
Power Dissipation	P_D	800	mW
Operating Junction Temperature	T_j	$-30 \sim 150$	$^{\circ}\text{C}$
Operating Temperature	T_{opr}	$-30 \sim 75$	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	$-55 \sim 150$	$^{\circ}\text{C}$

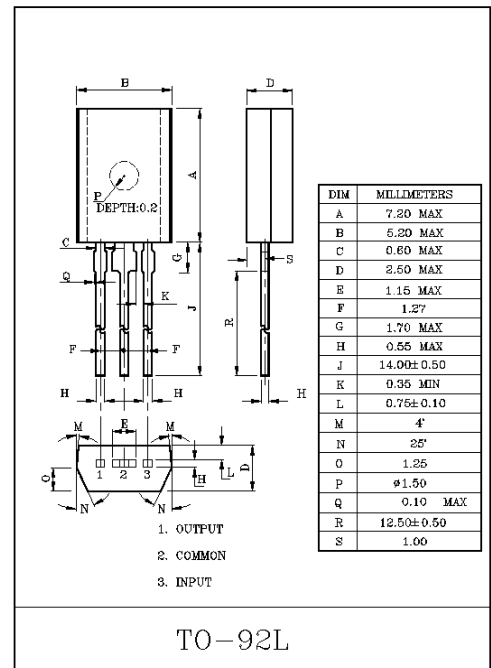

EQUIVALENT CIRCUIT

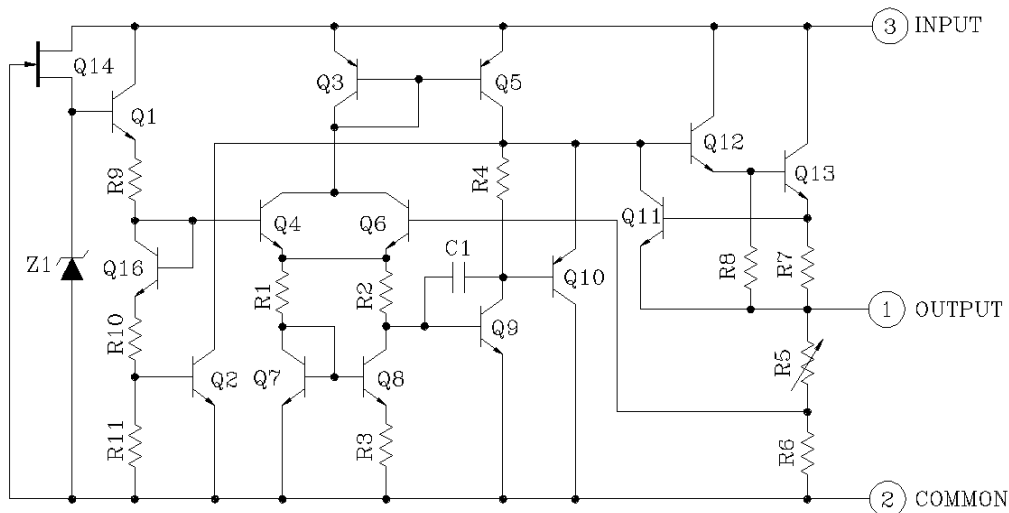

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L05BP/BPV

(Unless otherwise specified, $V_{IN}=10V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _j =25℃		4.8	5.0	5.2	V
Input Regulation	Reg line	1	T _j =25℃	7.0V ≤ V _{IN} ≤ 20V	-	55	150	mV
				8.0V ≤ V _{IN} ≤ 20V	-	45	100	
Load Regulation	Reg load	1	T _j =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	11	60	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	5.0	30	
Output Voltage	V _{OUT}	1	7.0V ≤ V _{IN} ≤ 20V 1.0mA ≤ I _{OUT} ≤ 40mA		4.75	-	5.25	V
			V _{IN} =10V, 1.0mA ≤ I _{OUT} ≤ 70mA		4.75	-	5.25	
Quiescent Current	I _B	1	T _j =25℃		-	3.1	6.0	mA
			T _j =125℃		-	-	5.5	
Quiescent Current Change	ΔI _B	1	8.0V ≤ V _{IN} ≤ 20V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	40	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	12	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 8.0V ≤ V _{IN} ≤ 18V, T _j =25℃		41	49	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _j =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-0.6	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L06BP/BPV

(Unless otherwise specified, $V_{IN}=11V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		5.76	6.0	6.24	V
Input Regulation	Reg line	1	T _J =25℃	8.1V ≤ V _{IN} ≤ 21V	-	50	150	mV
				9.0V ≤ V _{IN} ≤ 21V	-	45	110	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	12	70	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	5.5	35	
Output Voltage	V _{OUT}	1	8.1V ≤ V _{IN} ≤ 21V 1.0mA ≤ I _{OUT} ≤ 40mA		5.7	-	6.3	V
			V _{IN} =11V, 1.0mA ≤ I _{OUT} ≤ 70mA		5.7	-	6.3	
Quiescent Current	I _B	1	T _J =25℃		-	3.1	6.0	mA
			T _J =125℃		-	-	5.5	
Quiescent Current Change	ΔI _B	1	9.0V ≤ V _{IN} ≤ 20V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	40	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	14	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 9.0V ≤ V _{IN} ≤ 19V, T _J =25℃		39	47	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-0.7	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L07BP/BPV

(Unless otherwise specified, $V_{IN}=12V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		6.72	7.0	7.28	V
Input Regulation	Reg line	1	T _J =25℃	9.2V ≤ V _{IN} ≤ 22V	-	50	160	mV
				10V ≤ V _{IN} ≤ 22V	-	45	115	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	13	75	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	6.0	40	
Output Voltage	V _{OUT}	1	9.2V ≤ V _{IN} ≤ 22V 1.0mA ≤ I _{OUT} ≤ 40mA		6.65	-	7.35	V
			V _{IN} =12V, 1.0mA ≤ I _{OUT} ≤ 70mA		6.65	-	7.35	
Quiescent Current	I _B	1	T _J =25℃		-	3.1	6.5	mA
			T _J =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	10V ≤ V _{IN} ≤ 22V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	50	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	17	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 10V ≤ V _{IN} ≤ 20V, T _J =25℃		37	46	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-0.75	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L08BP/BPV

(Unless otherwise specified, $V_{IN}=14V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		7.7	8.0	8.3	V
Input Regulation	Reg line	1	T _J =25℃	10.5V ≤ V _{IN} ≤ 23V	-	20	175	mV
				11V ≤ V _{IN} ≤ 23V	-	12	125	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	15	80	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	7.0	40	
Output Voltage	V _{OUT}	1	10.5V ≤ V _{IN} ≤ 23V 1.0mA ≤ I _{OUT} ≤ 40mA		7.6	-	8.4	V
			V _{IN} =14V, 1.0mA ≤ I _{OUT} ≤ 70mA		7.6	-	8.4	
Quiescent Current	I _B	1	T _J =25℃		-	3.1	6.5	mA
			T _J =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	11V ≤ V _{IN} ≤ 23V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	60	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	20	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 12V ≤ V _{IN} ≤ 23V, T _J =25℃		37	45	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-0.8	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L09BP/BPV

(Unless otherwise specified, $V_{IN}=15V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	1	$T_j=25^{\circ}C$	8.64	9.0	9.36	V
Input Regulation	Reg line	1	$T_j=25^{\circ}C$ $11.4V \leq V_{IN} \leq 24V$	-	80	200	mV
			$12V \leq V_{IN} \leq 24V$	-	20	160	
Load Regulation	Reg load	1	$T_j=25^{\circ}C$ $1.0mA \leq I_{OUT} \leq 100mA$	-	17	90	mV
			$1.0mA \leq I_{OUT} \leq 40mA$	-	8.0	45	
Output Voltage	V_{OUT}	1	$11.4V \leq V_{IN} \leq 24V$ $1.0mA \leq I_{OUT} \leq 40mA$	8.55	-	9.45	V
			$V_{IN}=15V$, $1.0mA \leq I_{OUT} \leq 70mA$	8.55	-	9.45	
Quiescent Current	I_B	1	$T_j=25^{\circ}C$	-	3.2	6.5	mA
			$T_j=125^{\circ}C$	-	-	6.0	
Quiescent Current Change	ΔI_B	1	$11.5V \leq V_{IN} \leq 26V$	-	-	1.5	mA
			$1.0mA \leq I_{OUT} \leq 40mA$	-	-	0.1	
Output Noise Voltage	V_{NO}	1	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100kHz$	-	65	-	μV_{rms}
Long Term Stability	$\Delta V_{OUT}/\Delta t$	1		-	21	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	$f=120Hz$, $12V \leq V_{IN} \leq 24V$, $T_j=25^{\circ}C$	36	44	-	dB
Dropout Voltage	$ V_{IN} - V_{OUT} $	1	$T_j=25^{\circ}C$	-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC_{VO}	1	$I_{OUT}=5mA$	-	-0.85	-	mV/ $^{\circ}C$

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L10BP/BPV

(Unless otherwise specified, $V_{IN}=16V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		9.6	10	10.4	V
Input Regulation	Reg line	1	T _J =25℃	12.5V ≤ V _{IN} ≤ 25V	-	80	230	mV
				13V ≤ V _{IN} ≤ 25V	-	30	170	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	18	90	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	8.5	45	
Output Voltage	V _{OUT}	1	12.5V ≤ V _{IN} ≤ 25V 1.0mA ≤ I _{OUT} ≤ 40mA		9.5	-	10.5	V
			V _{IN} =16V, 1.0mA ≤ I _{OUT} ≤ 70mA		9.5	-	10.5	
Quiescent Current	I _B	1	T _J =25℃		-	3.2	6.5	mA
			T _J =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	13V ≤ V _{IN} ≤ 25V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	70	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	22	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 13V ≤ V _{IN} ≤ 24V, T _J =25℃		36	43	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-0.9	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L12BP/BPV

(Unless otherwise specified, $V_{IN}=19V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _j =25℃		11.5	12	12.5	V
Input Regulation	Reg line	1	T _j =25℃	14.5V ≤ V _{IN} ≤ 27V	-	120	250	mV
				16V ≤ V _{IN} ≤ 27V	-	100	200	
Load Regulation	Reg load	1	T _j =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	20	100	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	10	50	
Output Voltage	V _{OUT}	1	14.5V ≤ V _{IN} ≤ 27V 1.0mA ≤ I _{OUT} ≤ 40mA		11.4	-	12.6	V
			V _{IN} =19V, 1.0mA ≤ I _{OUT} ≤ 70mA		11.4	-	12.6	
Quiescent Current	I _B	1	T _j =25℃		-	3.2	6.5	mA
			T _j =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	16V ≤ V _{IN} ≤ 27V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	Ta=25℃, 10Hz ≤ f ≤ 100kHz		-	80	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	24	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 15V ≤ V _{IN} ≤ 25V, T _j =25℃		36	41	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _j =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	1.0	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L13BP/BPV

(Unless otherwise specified, $V_{IN}=21V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		12.45	13	13.55	V
Input Regulation	Reg line	1	T _J =25℃	16V ≤ V _{IN} ≤ 28V	-	125	270	mV
				17V ≤ V _{IN} ≤ 28V	-	105	225	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	22	120	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	11	60	
Output Voltage	V _{OUT}	1	16V ≤ V _{IN} ≤ 28V 1.0mA ≤ I _{OUT} ≤ 40mA		12.54	-	13.86	V
			V _{IN} =21V, 1.0mA ≤ I _{OUT} ≤ 70mA		12.54	-	13.86	
Quiescent Current	I _B	1	T _J =25℃		-	3.2	6.5	mA
			T _J =125℃		-	3.2	6.0	
Quiescent Current Change	ΔI _B	1	17V ≤ V _{IN} ≤ 28V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	Ta=25℃, 10Hz ≤ f ≤ 100kHz		-	90	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	28	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 17V ≤ V _{IN} ≤ 27V, T _J =25℃		34	41	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	1.2	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L15BP/BPV

(Unless otherwise specified, $V_{IN}=23V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _j =25℃		14.4	15	15.6	V
Input Regulation	Reg line	1	T _j =25℃	17.5V ≤ V _{IN} ≤ 30V	-	130	300	mV
				20V ≤ V _{IN} ≤ 30V	-	110	250	
Load Regulation	Reg load	1	T _j =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	25	150	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	12	75	
Output Voltage	V _{OUT}	1	17.5V ≤ V _{IN} ≤ 30V 1.0mA ≤ I _{OUT} ≤ 40mA		14.25	-	15.75	V
			V _{IN} =23V, 1.0mA ≤ I _{OUT} ≤ 70mA		14.25	-	15.75	
Quiescent Current	I _B	1	T _j =25℃		-	3.3	6.5	mA
			T _j =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	20V ≤ V _{IN} ≤ 30V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	90	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	30	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 18.5V ≤ V _{IN} ≤ 28.5V, T _j =25℃		34	40	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _j =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-1.3	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L18BP/BPV

(Unless otherwise specified, $V_{IN}=27V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		17.3	18	18.7	V
Input Regulation	Reg line	1	T _J =25℃	21.4V ≤ V _{IN} ≤ 33V	-	32	325	mV
				22V ≤ V _{IN} ≤ 33V	-	27	275	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	30	170	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	15	75	
Output Voltage	V _{OUT}	1	21.4V ≤ V _{IN} ≤ 33V 1.0mA ≤ I _{OUT} ≤ 40mA		17.1	-	18.9	V
			V _{IN} =27V, 1.0mA ≤ I _{OUT} ≤ 70mA		17.1	-	18.9	
Quiescent Current	I _B	1	T _J =25℃		-	3.3	6.5	mA
			T _J =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	22V ≤ V _{IN} ≤ 33V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	Ta=25℃, 10Hz ≤ f ≤ 100kHz		-	150	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	45	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 23V ≤ V _{IN} ≤ 33V, T _J =25℃		32	38	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-1.5	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS

KIA78L20BP/BPV

(Unless otherwise specified, $V_{IN}=29V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _j =25℃		19.2	20	20.8	V
Input Regulation	Reg line	1	T _j =25℃	23.5V ≤ V _{IN} ≤ 35V	-	33	330	mV
				24V ≤ V _{IN} ≤ 35V	-	28	285	
Load Regulation	Reg load	1	T _j =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	33	180	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	17	90	
Output Voltage	V _{OUT}	1	23.5V ≤ V _{IN} ≤ 35V 1.0mA ≤ I _{OUT} ≤ 40mA		19.0	-	21.0	V
			V _{IN} =29V, 1.0mA ≤ I _{OUT} ≤ 70mA		19.0	-	21.0	
Quiescent Current	I _B	1	T _j =25℃		-	3.3	6.5	mA
			T _j =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	24V ≤ V _{IN} ≤ 35V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	170	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	49	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 25V ≤ V _{IN} ≤ 35V, T _j =25℃		31	37	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _j =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-1.7	-	mV/℃

KIA78L05BP/BPV ~ KIA78L24BP/BPV

ELECTRICAL CHARACTERISTICS


KIA78L24BP/BPV

(Unless otherwise specified, $V_{IN}=33V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	V _{OUT}	1	T _J =25℃		23	24	25	V
Input Regulation	Reg line	1	T _J =25℃	27.5V ≤ V _{IN} ≤ 38V	-	35	350	mV
				28V ≤ V _{IN} ≤ 38V	-	30	300	
Load Regulation	Reg load	1	T _J =25℃	1.0mA ≤ I _{OUT} ≤ 100mA	-	40	200	mV
				1.0mA ≤ I _{OUT} ≤ 40mA	-	20	100	
Output Voltage	V _{OUT}	1	27.5V ≤ V _{IN} ≤ 38V 1.0mA ≤ I _{OUT} ≤ 40mA		22.8	-	25.2	V
			V _{IN} =33V, 1.0mA ≤ I _{OUT} ≤ 70mA		22.8	-	25.2	
Quiescent Current	I _B	1	T _J =25℃		-	3.5	6.5	mA
			T _J =125℃		-	-	6.0	
Quiescent Current Change	ΔI _B	1	28V ≤ V _{IN} ≤ 38V		-	-	1.5	mA
			1.0mA ≤ I _{OUT} ≤ 40mA		-	-	0.1	
Output Noise Voltage	V _{NO}	1	T _a =25℃, 10Hz ≤ f ≤ 100kHz		-	200	-	μV _{rms}
Long Term Stability	ΔV _{OUT} /Δt	1			-	56	-	mV/ 1.0kHrs
Ripple Rejection Ratio	RR	2	f=120Hz, 29V ≤ V _{IN} ≤ 39V, T _J =25℃		31	35	-	dB
Dropout Voltage	V _{IN} - V _{OUT}	1	T _J =25℃		-	1.7	-	V
Average Temperature Coefficient of Output Voltage	TC _{VO}	1	I _{OUT} =5mA		-	-2.0	-	mV/℃


KIA78L05BP/BPV ~ KIA78L24BP/BPV

TEST CIRCUIT/STANDARD APPLICATION CIRCUIT

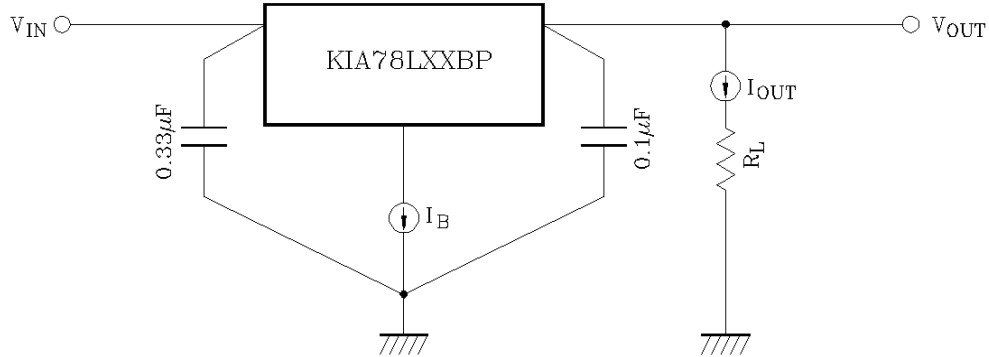


TEST CIRCUITS

1. V_{OUT} , $R_{reg \cdot line}$, $R_{reg \cdot load}$, V_{OUT} , I_B , ΔI_B , V_{NO} , $\Delta V_{OUT} / \Delta t$, $|V_{IN} - V_{OUT}|$, TC_{VO}

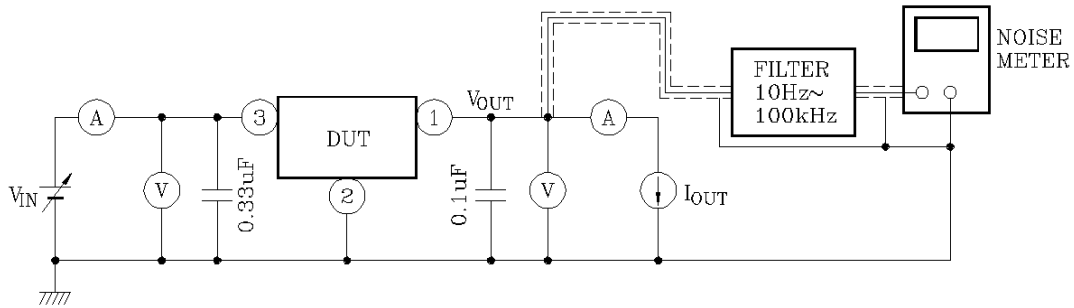


2. RR

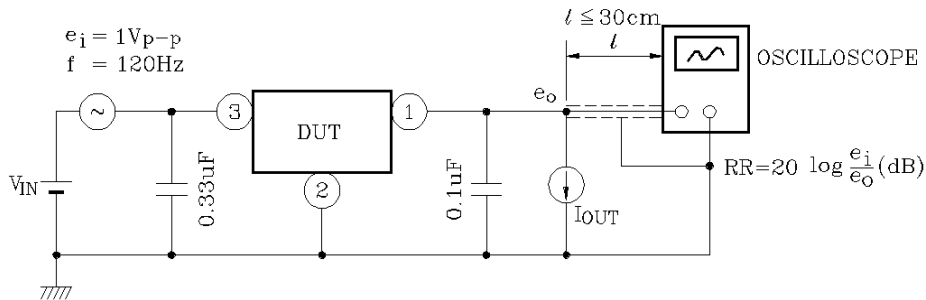

KIA78L05BP/BPV ~ KIA78L24BP/BPV


(1) STANDARD APPLICATION

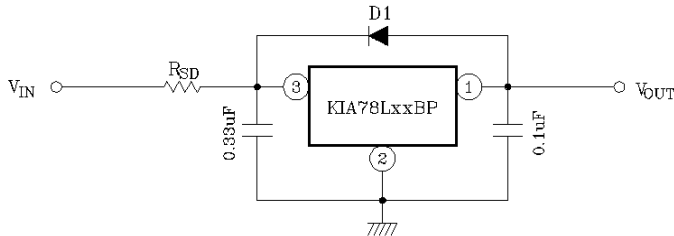

D1 : Protection Diode
High speed diode D1 should be connected as shown in the figure if the condition $V_{IN} < V_{OUT}$ might occur by surge voltage or power supply ON/OFF.

R_{SD} : Power limiting resistor for large V_{IN} , resistor R_{SD} is needed to limit IC power dissipation.

(2) A. CURRENT BOOST VOLTAGE REGULATOR

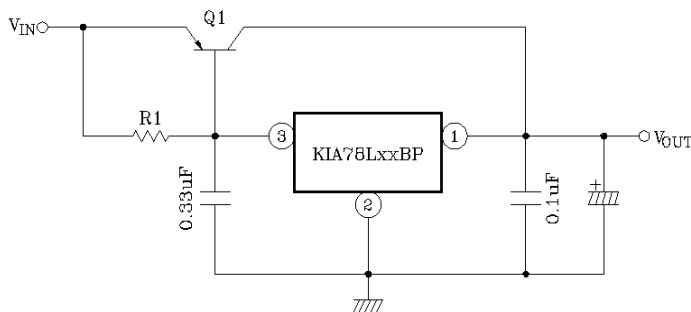


Heat sink is needed for Q1

$$R1 \leq \frac{V_{BE1}}{I_{B(MAX)}}$$

where, V_{BE1} : V_{BE} of external transistor Q1

$I_{B(MAX)}$: Quiescent current of IC


B. SHORT-CIRCUIT PROTECTION

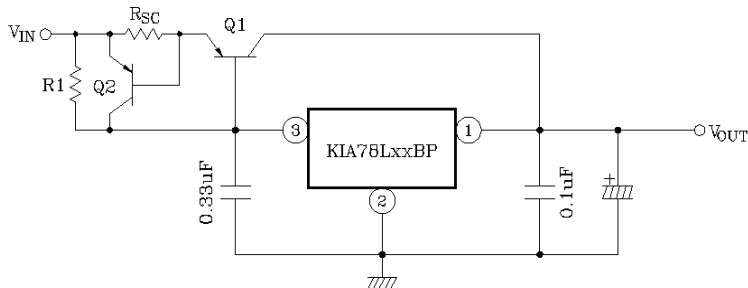

$$R_{SC} = \frac{V_{BE2}}{I_{SC}}$$

where, I_{SC} : Short-Circuit current


(3) CURRENT REGULATOR

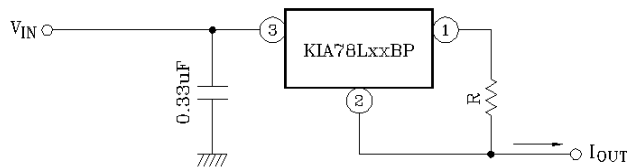

$$I_{OUT} = \frac{V_{OUT}}{R} + I_B$$


KIA78L05BP/BPV ~ KIA78L24BP/BPV

(4) VOLTAGE BOOST REGULATOR

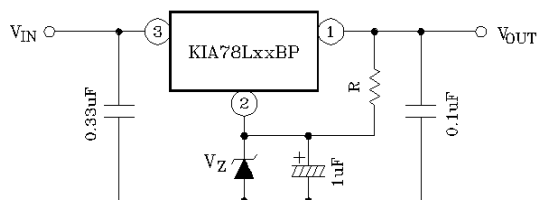


$$V_{OUT} = V_Z + V_{OUT} \text{ (of IC)}$$

A little of current in resistor R is needed.

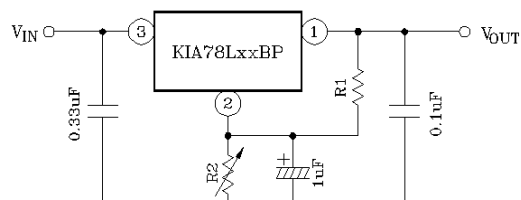


$$V_{OUT} = R2 \left(I_B + \frac{V_{OUT} \text{ (of IC)}}{R1} \right) + V_{OUT} \text{ (of IC)}$$

(5) NEGATIVE REGULATOR

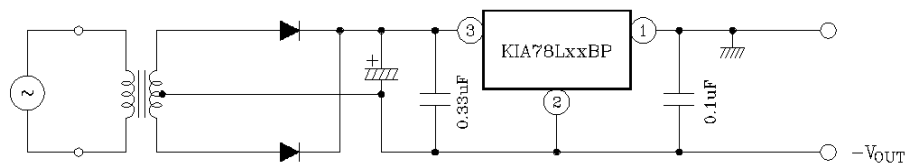

(6) POSITIVE AND NEGATIVE REGULATOR





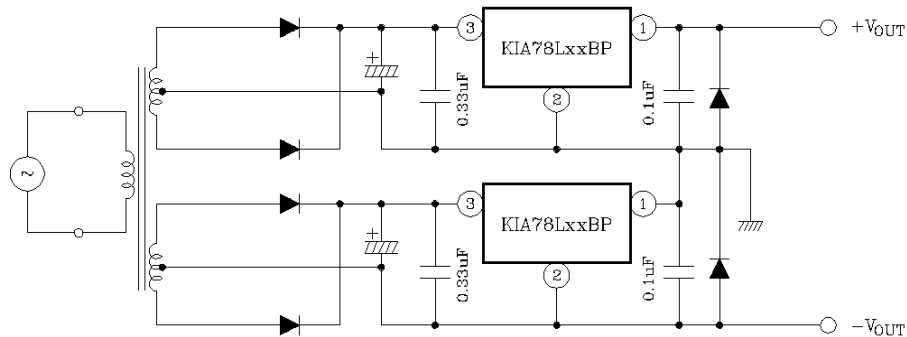


KIA78L05BP/BPV ~ KIA78L24BP/BPV

PRECAUTIONS FOR USE

When such a high voltage as exceeds 10V beyond the fixed output voltage (Typ. value) of IC is applied to the output terminal of IC, the IC may be destroyed. In such a case, it is advised to prevent an excessive voltage from being applied to the IC by connecting a zener diode between the output terminal and the GND. Especially, in the current boost circuit as shown in example (2) of application circuits, an input voltage may be suddenly applied to the output terminal of IC in the form of steps, and that in case of light load, an excessive voltage may be transiently applied to the output terminal of IC: So that great care should be taken to this matter. In this case, in addition to the above, it may become necessary to consider such a countermeasure as the output capacitor in use is replaced with a capacitor of larger capacitance, or as R1 (a resistor for IC bias current) or bypass is replaced with a resistor of smaller resistance according to circumstance or as the input voltage is gradually raised.

KIA78L05BP/BPV ~ KIA78L24BP/BPV

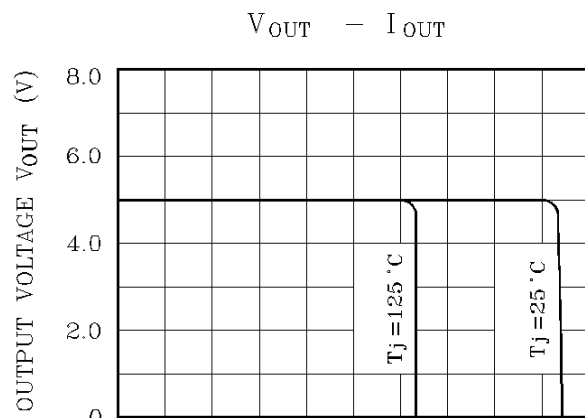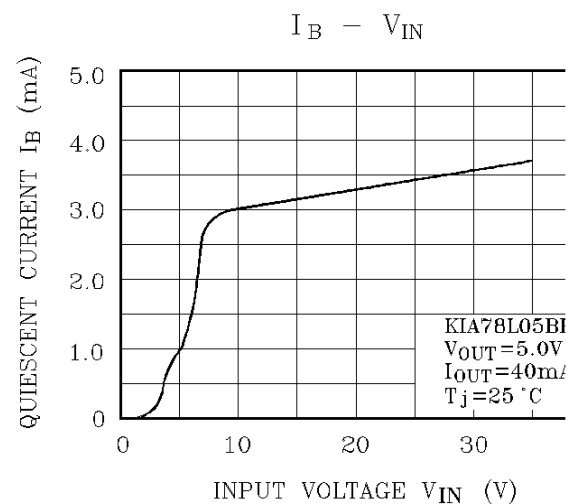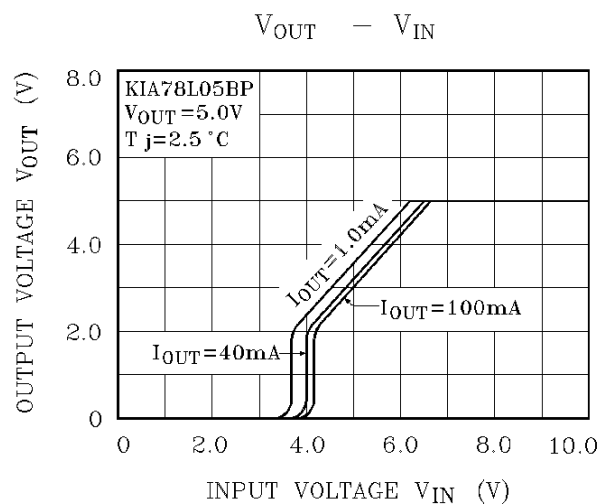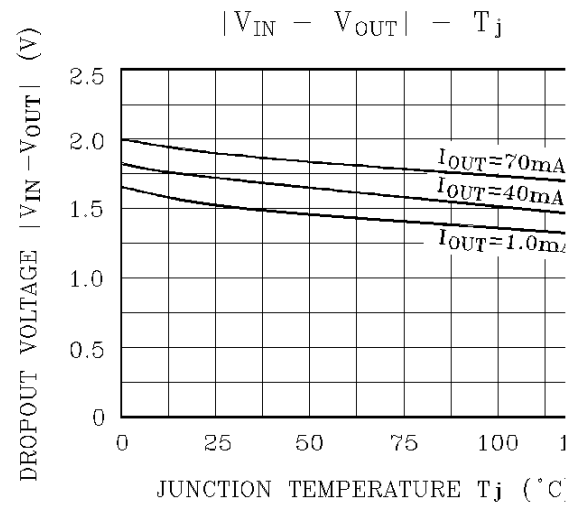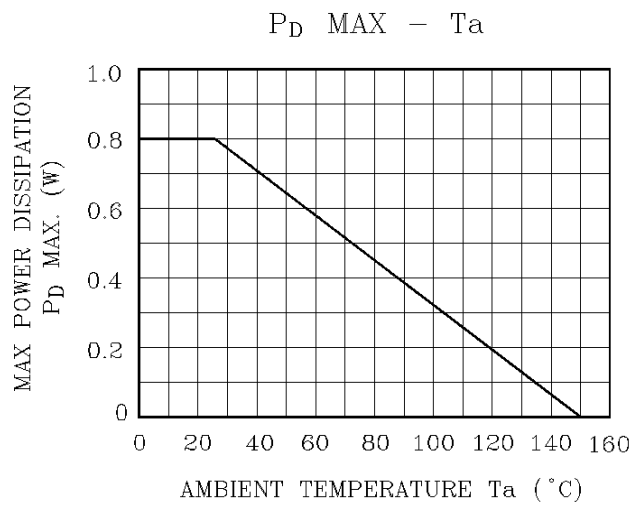

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.