

● Part Numbering

Inductors for Power Lines

(Part Number)

LQ	M	21	P	N	R54	M	G	0	D
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Product ID

Product ID	
LQ	Chip Inductors (Chip Coils)

② Structure

Code	Structure
H	Wire Wound Type (Ferrite Core)
M	Multilayer Type (Ferrite Core)
W	Wire Wound Type (Ferrite Core)

③ Dimensions (LxW)

Code	Nominal Dimensions (LxW)	Size Code (in inch)
15	1.0x0.5mm	0402
18	1.6x0.8mm	0603
21	2.0x1.25mm	0805
2M	2.0x1.6mm	0806
2H	2.5x2.0mm	1008
3N	3.0x3.0mm	1212
31	3.2x1.6mm	1206
32	3.2x2.5mm	1210
43	4.5x3.2mm	1812
44	4.0x4.0mm	1515
5B	5.0x5.0mm	2020
55	5.7x5.0mm	2220
66	6.3x6.3mm	2525

④ Applications and Characteristics

Code	Series	Applications and Characteristics
D	LQM	for Choke (Low-current DC Power Supplies)
F		for Choke (DC Power Supplies)
D	LQH	for Choke
S		for Choke (Magnetically Shielded Type)
C		for Choke (Coating Type)
P	LQM/LQH	for Power Line
C	LQW	
D	LQW	for Power Line (Large Inductance Type)

⑤ Category

Code	Category	
N	Standard Type	
B	Special Feature Classification	
W		
E		
Z	Automotive	Infotainment
H		Powertrain/Safety

⑥ Inductance

Expressed by three-digit alphanumerics. The unit is micro-henry (μH). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits. If inductance is less than $0.1\mu\text{H}$, the inductance code is expressed by a combination of two figures and the capital letter "N," and the unit of inductance is nano-henry (nH). The capital letter "N" indicates the unit of "nH," and also expresses a decimal point. In this case, all figures are significant digits. For those products whose inductance values are specified using three designated digits, these values may be indicated using the closest two digits instead.

⑦ Inductance Tolerance

Code	Inductance Tolerance
K	$\pm 10\%$
M	$\pm 20\%$
N	$\pm 30\%$

⑧ Features (Except for LQH□□P/LQM□□P)

Code	Features	Series
0	Standard Type	LQM/LQH/LQW
2	Standard Type	LQH32C/32D
3	Low DC Resistance	LQH32C/43CN
5	Low Profile Type	LQH2MC/32C/32D
7	Large Current Type	LQM18D/21D/21F
8	Low DC Resistance / Large Current Type	LQM21F

⑨ Thickness

(LQH□□P/LQM□□P Only • Except for LQH43P/LQH5BPN_38)

Code	Nominal Dimensions (T)
B	0.35mm
C	0.5mm
D	0.6mm
E	0.7mm
F	0.8mm
O	0.85mm
G	0.9mm
J	1.1mm
M	1.4mm
N	1.55mm
P	1.65mm
T	2.0mm

Continued on the following page. ↗

Continued from the preceding page. ↘

⑨ Electrode (Except for LQH□□P/LQM□□P)

•Lead (Pb) Free

Code	Electrode	Series
0	Sn	LQM/LQW
2		LQH2MC
3	LF Solder	LQH (Except for LQH2MC)

⑨ Specification

(LQH□□P/LQM□□P Only • Except for LQH43P/LQH5BPN_38)

Code	Specification
O/S	Standard Type
C	Good Bias Current Characteristics Type
H/A/E	High Spec Type (Low DC Resistance; Good Bias Current Characteristics Type)
R	Low DC Resistance Type

⑨⑨ Thickness (LQH43P/LQH5BPN_38 Only)

Code	Dimensions (T)
26	2.6mm
38	4.0mm max.

⑩ Packaging

Code	Packaging
K	Embossed Taping (ø330mm Reel)
F	
L	Embossed Taping (ø180mm Reel)
E	
B	Bulk
J	Paper Taping (ø330mm Reel)
D	Paper Taping (ø180mm Reel)

Product Search > Inductors > LQM21FN100M80#

Multilayer type Inductor for Power Lines

Please be sure to read these general terms of use, before using this product.
Cautions about imitations

LQM21FN100M80#

"#" indicates a package specification code.


Large Current, Low DC Resistance Type

In Production



< List of part numbers with package codes >
LQM21FN100M80B LQM21FN100M80K LQM21FN100M80L

Appearance & Shape

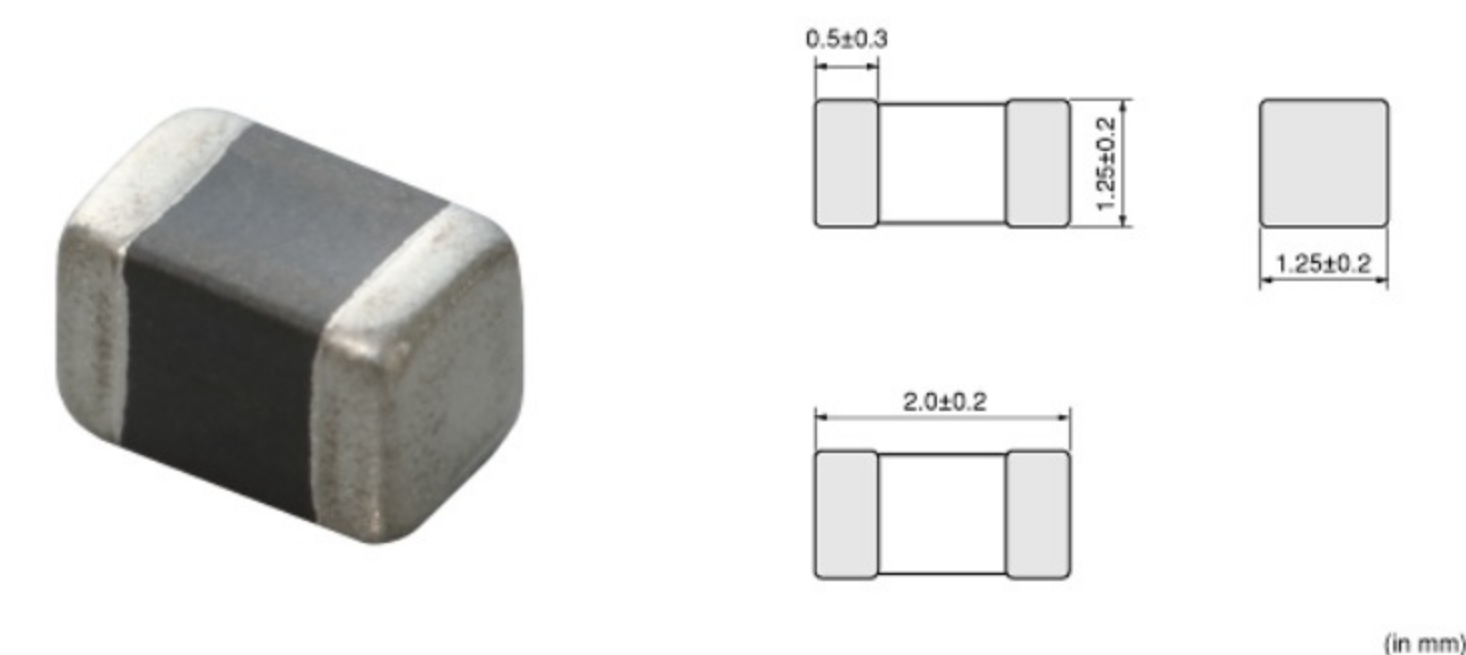

Specifications

[Search for products with similar specifications](#)


L size	2.0±0.2mm
W size	1.25±0.2mm
T size	1.25±0.2mm
Size code inch (mm)	0805 (2012)
Inductance	10μH±20%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	100mA
Max. of DC resistance	0.39Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	15MHz
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Brand	Murata
DC Resistance Intermediate Values	0.30Ω±30%
Series	LQM21FN_80

References


Packaging	Specifications	Standard Packing Quantity
B	Bulk(Bag)	1000
K	330Embossed Tape	10000
L	180Embossed Tape	3000

Mass (typ.)	
1 piece	0.016g

Characteristic Data

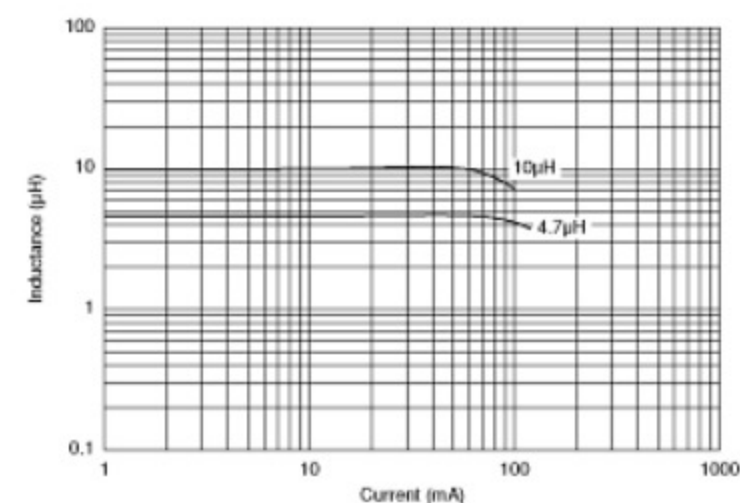

Impedance - Current Characteristics

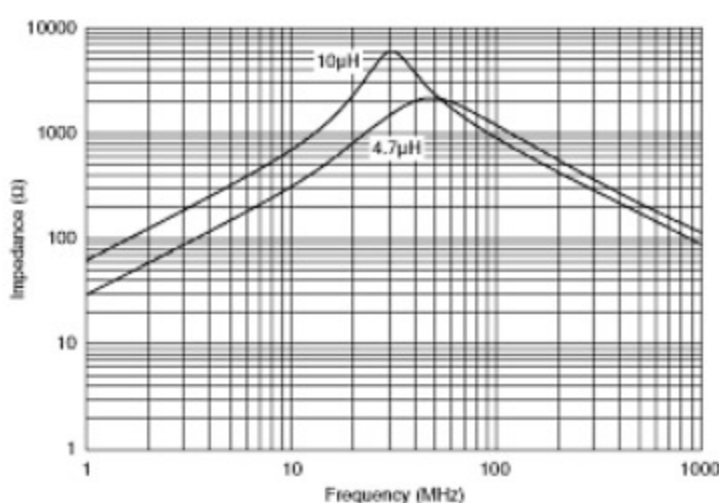

Impedance - Frequency Characteristics

Contact Us

Request Samples (form)

Request a Quote

Request Technical Support

20pcs free sample request

Stock Check (Where to buy)

Download a PDF file of this page

How to read part numbers

Series Information

Details

Specifications Sheet
(with cautions/mounting/packaging)

SnapEDA

CAD Models


Share This Page



What is SimSurfing?

- Supports you in the selection of electronic components
- Provided free-of-charge
- Abundant data

Introduction video now available.



E-mail Magazine

In this e-mail magazine, we provide information on products and various events and campaigns. We also frequently introduce how to use parts, and applications and technical information service guides.

Register now



Contact Information

Products

[Electronic Components](#)

[Solutions](#)

[Other Products](#)

[Applications](#)

Support

[FAQs](#)

[PDF Catalog Library](#)

[Video Library](#)

[Contact Information](#)

[Stock Check](#)

Product News

[Articles](#)

[my Murata](#)

[Exhibitions](#)

[Webinars](#)

[Campaign](#)

Official Social Media



EU RoHS / REACH & California Proposition 65

Approach for chemical regulation for Murata Products.