



深圳市雷斯达光电科技有限公司  
SHENZHEN LEDSTAR LIGHTING CO.,LTD.

Tel: 86-755-89822286 84682177 Fax: 86-755-89355831

Add: No.3 Building, C1 Area, Luoshan Industrial Park, Pinghu Town, Shenzhen City, China

---

# Super Bright 130LM/W LED Plastic Tube Specification

Product Name: T8 PC Tube-60CM-7W-H

Item Number: LSD007WIIG13-330°-H-N-PC



CE RoHS IES

**LEDSTAR LIGHTING CO., LTD**

**Tel:** +86-755-89822286/84682177

**Fax:** +86-755-89355831

**Web:** <http://www.ledstaring.com>

<http://ledstaring.gmc.globalmarket.com>

<http://ledstar.manufacturer.globalsources.com>

**Factory Add:** No.3 Building, C1 Area, Luoshan Industrial Park, Pinghu Town, Shenzhen City, China

---



### Features & Advantages

- ◆ Super brightness, 130lm/w, uniform & soft light, can help you save more energy (eg. Save 28% energy than normal led) and money compared with the normal LED Tube;
- ◆ SMD 2835 LED Source, high CIR > 80Ra, PF > 0.9, high power efficiency > 93%.
- ◆ LED Source qualified by LM80, Low lumen decay (2% within 6000hrs), 3 years warranty, more stable quality and durable than the normal LED Tube;
- ◆ Elegant appearance, fashionable, stronger packaging protection;
- ◆ Environment Friendly: No UV, IR radiation, No Mercury, No pollution ;

### Unique selling points

- ◆ 130lm/w (PC cover) super brightness save more energy compared with the normal LED tube. For example, 1.2m-13W super bright LED PC tube can reach the same brightness (1755lm) as normal 1.2m-18W LED tube.
- ◆ Adopt imported chip, not the COB chip, less heat production and better heat dissipation compared with the normal LED Tube;
- ◆ Special new perfect product in the market, only launched by our factory, believe this new one product will help you to explore more market.

### Special service

- ◆ Your logo can be printed on the tube, also special labels with your company logo and item can be stucked, very helpful for your promotion;
- ◆ IES, data / DIALUX design is affordable for required project. CE, RoHS professional certifications are available;
- ◆ Professional solution of special requested product can be customized for your project;
- ◆ Any of your feedback & complaint will be solved within 2 working days quickly.


### Technical Parameters

- ◆ LED Type: SMD2835, 68pcs
  - ◆ Color Index : Epistar chip ≥ 80Ra CCT: 2800K-6500K
  - ◆ Input Voltage (V): AC90~260V Power: 7W Frequency: 50/60Hz Brightness: 910lm
  - ◆ Power Factor: 0.9 Efficiency: ≥ 93% Light Decay: < 2% within 6000Hrs
  - ◆ Material: PC Housing Cover
  - ◆ Dimension: Φ 26mm\*600mm
  - ◆ Life Span: 40,000~50,000H 3 years warranty
  - ◆ IP Rating: IP20 THD: 23%-25%
  - ◆ Working Temperature: -20~50°C
  - ◆ Storage Temperature: -40~85°C
-

## Product Pictures




## Luminous emittance

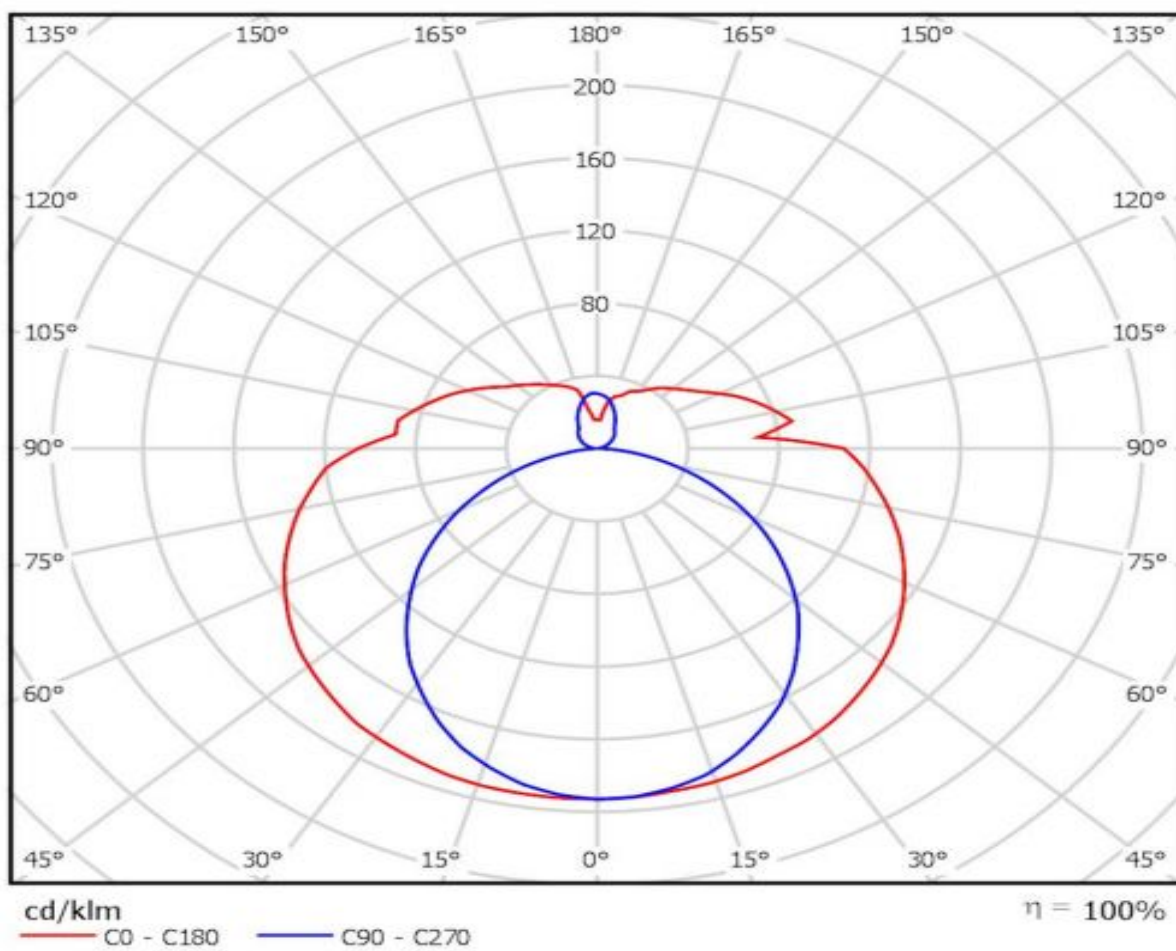




## Lux Distance Cure

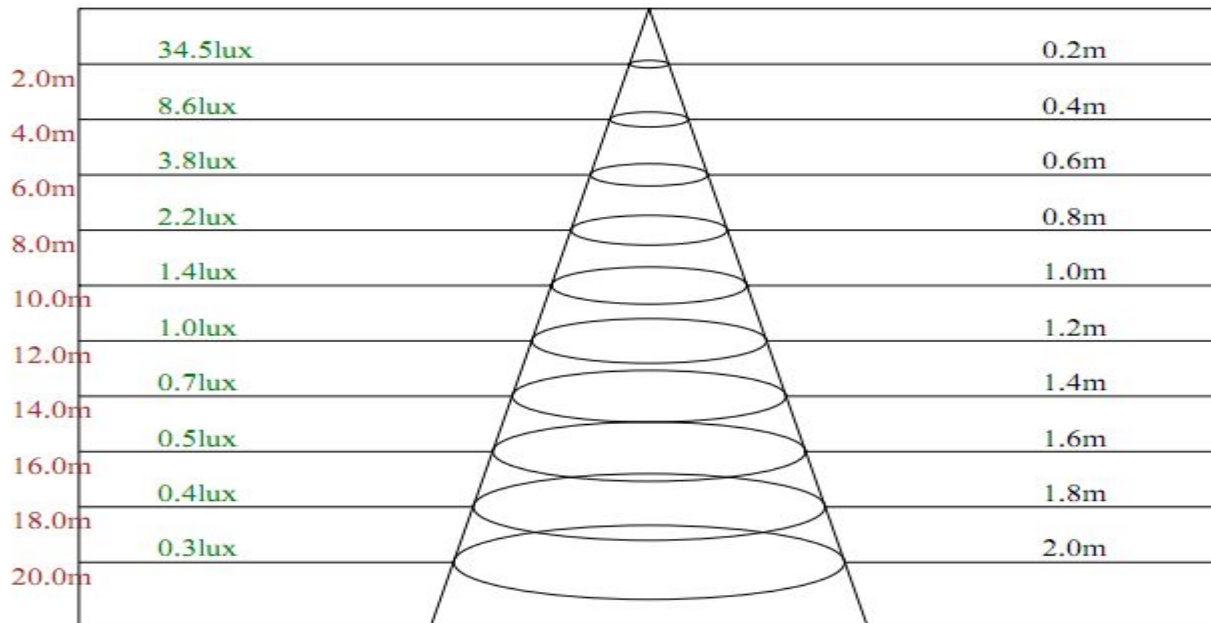


## Tube Dimension

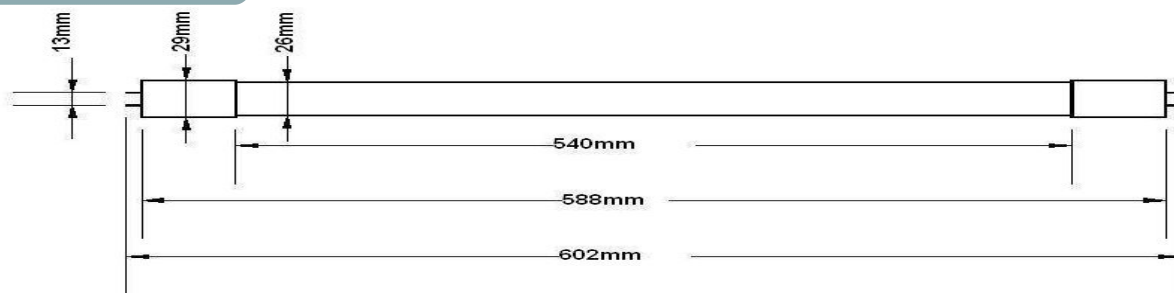

## Installation Methods


AC 90-260V

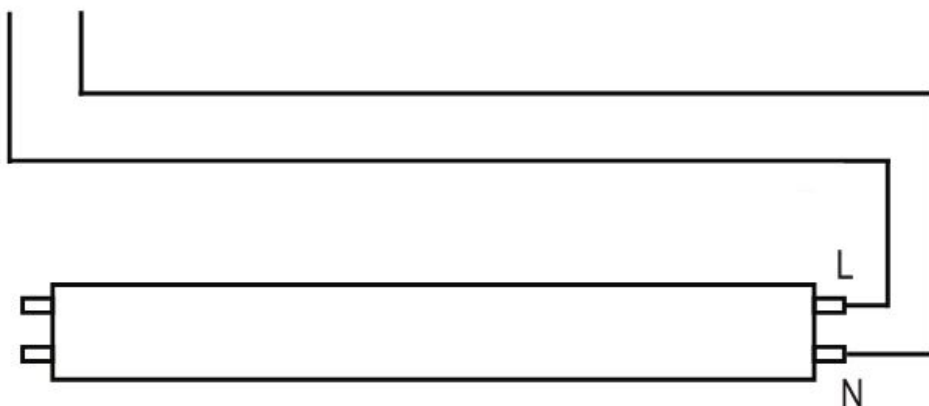

### Remarks

- ◆ Please cut off the electrical power when install or remove the light under professional technician's instruction.
- ◆ Make sure the lamp is suitable to the AC power supply.
- ◆ Please do not install the lamp in high temperature and moist place, make sure there have less than 75mm distance around the lamp to have a good heat dissipation.
- ◆ At any time, do not cover the lamp by insulation blanket or similar material.

### Application

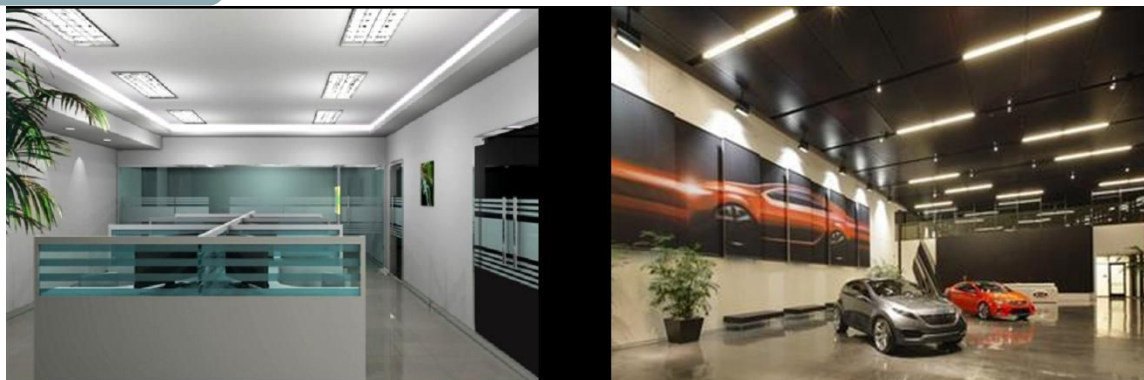

### Packing information

Model	Tube Dimension	GW/CTN	Qty/CTN	Outer Box Size
LSD007WIIG13-330° -H-N-PC	Φ 26mm*600mm	7KG	25pcs	650*230*220mm