

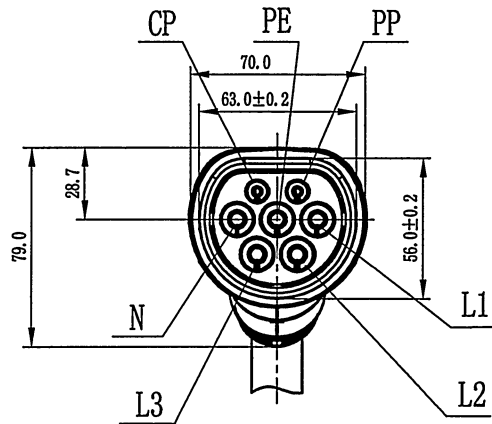
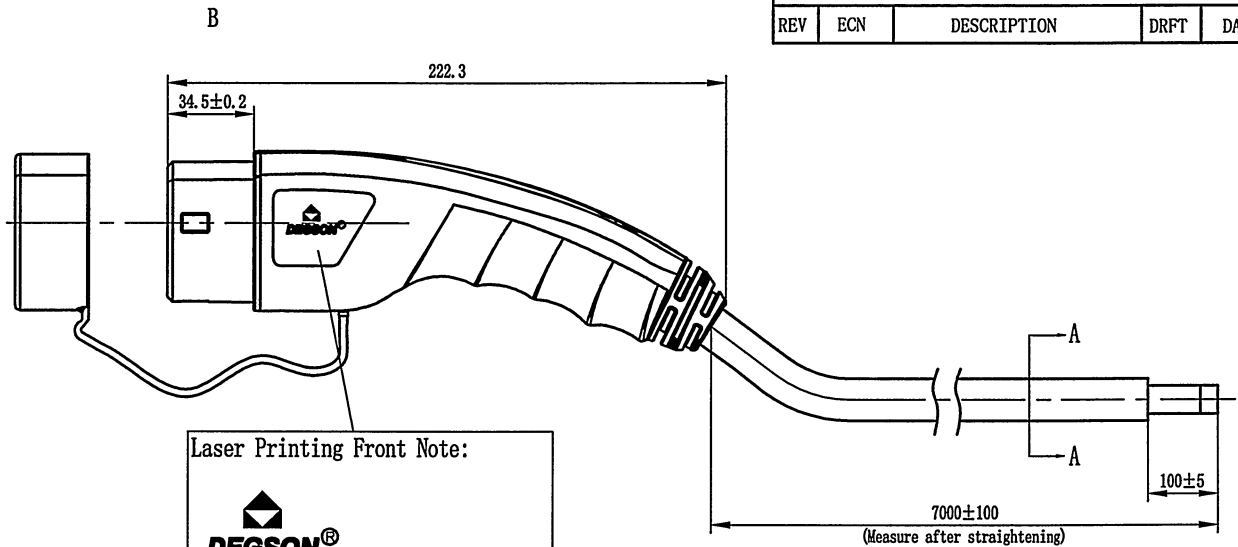



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



Wiring diagram

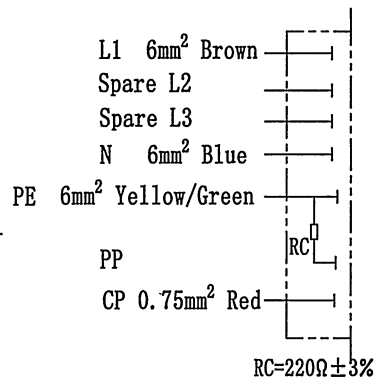

Laser Printing Front Note:
DEGSON[®]
 Laser Printing Back Note(Arial) :
 MEAC-S-032A-V-03-7.0M-10AH
 32A 250V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx

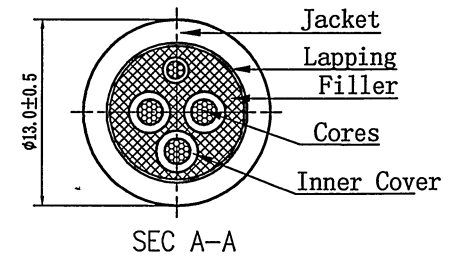

Technical parameters

Rated voltage	250V AC
Rated current	32A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC 1 min
Withstanding voltage	L、N and PE , 2500V AC 1 min
	L and N, 2500V AC 1 min
Ingress protection	IP54
The insertion/pullout times	10000 Times
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

NOTES:

1. Cable: IEC 62893-3/EN50620-2017 EV 3*6mm²+1*0.75mm² Black
2. RoHS Compliance

Size Measure Range	. XX	. X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	. XX	. X
	±0.5°	±1.0°

DETACHED LISTS	PART NO. : /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: ZX 2020.11.20	NAME: Vehicle Connector (32A AC single phase)		
	CHKD: DT 2020.11.20	MEAC-S-032A-V-03-7.0M-10A(H)		
	DRFT: CZM 2020. 11. 19	TITLE: Customer Drawing	REV	D0-1
	THIRD ANGLE PROJECTION	DRAWING NO. :	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE
				1:3