


REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

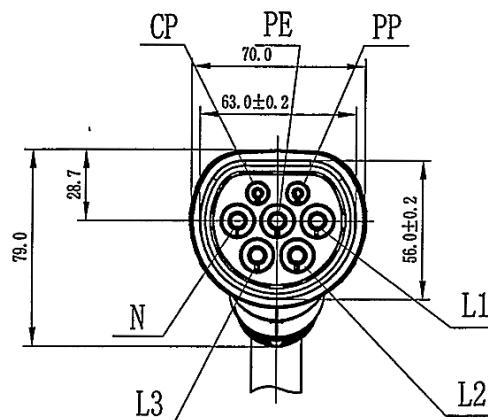

Wiring diagram

L1	2.5mm ² Brown
Spare L2	
Spare L3	
N	2.5mm ² Blue
PE	2.5mm ² Yellow/Green
PP	
CP	0.75mm ² Red

RC=680Ω±3%





Laser Printing Front Note:



Laser Printing Back Note(Arial):

MEAC-S-016A-V-03-5.0M-10AH
16A 250V AC
IEC 62196-2:2016
IP54
201xxxxx-xxxx

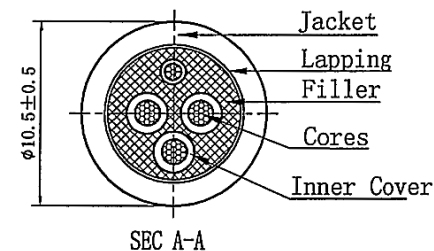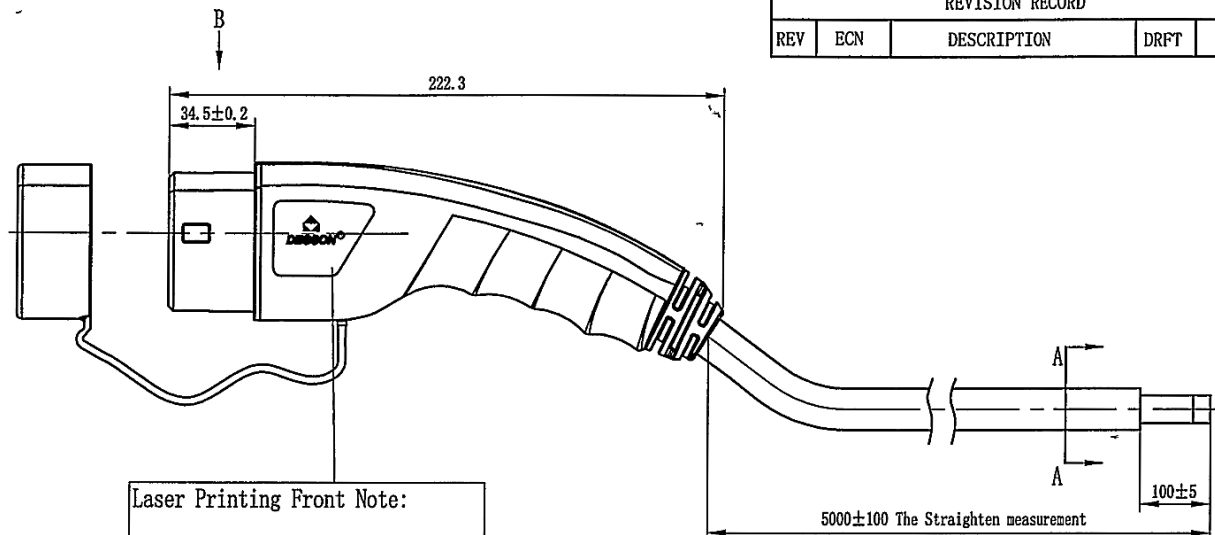

Technical parameters

Rated voltage	250V AC
Rated current	16A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC
Withstanding voltage	L, N AND PE >2500V AC L AND N >2500V AC
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

NOTES:

- Cable: EN50620-2017 EV 3*2.5mm²+1*0.75mm² Black
- RoHS Compliance

Customer Drawing


Size Measure Range	. XX	. X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	. XX	. X
	±0.5°	±1.0°

PART NO.:

APPD:

CHKD:

DRFT: XF LUO 2019-05-29



THIRD ANGLE PROJECTION



宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

Vehicle Connector (16A AC single phase)
MEAC-S-016A-V-03-5.0M-10AH

TITLE: Customer Drawing

DRAWING NO.: MEAC-S-016A-C01

IN (INCH)

DO NOT SCALE DRAWING

REV T0-1

SHEET 1/1

SCALE 1:3