

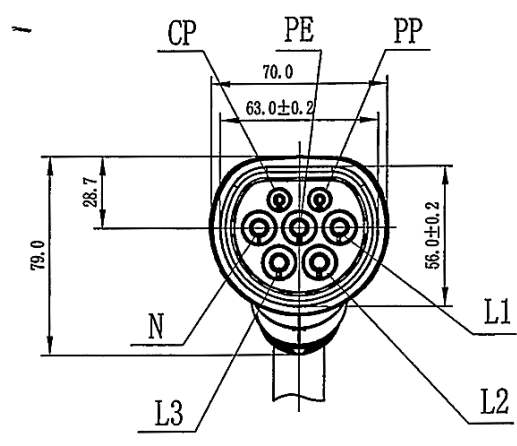


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

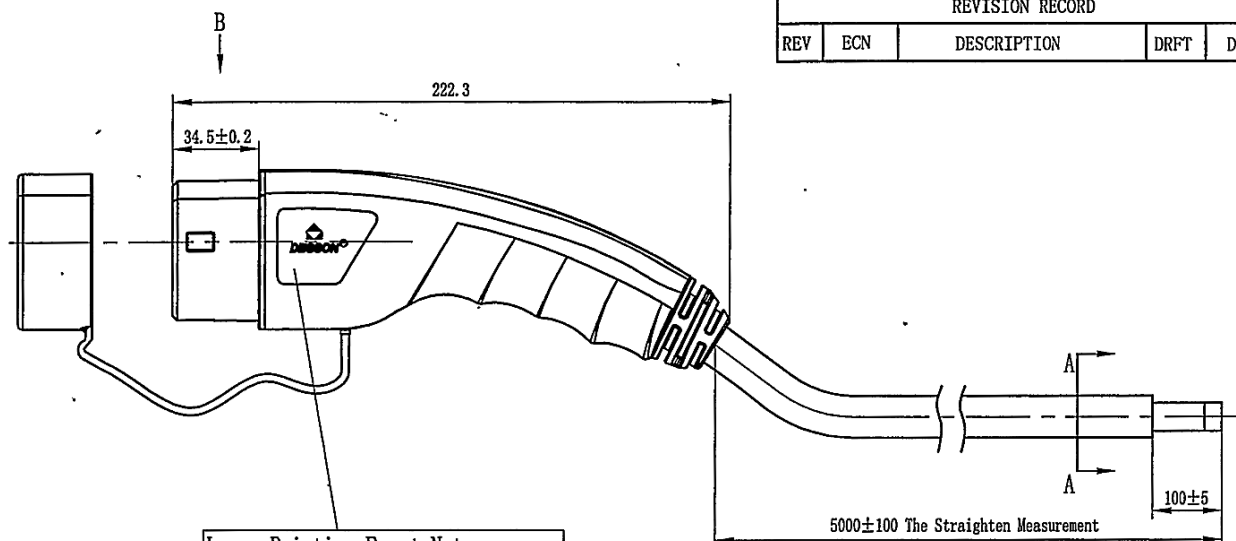

Wiring diagram

- L1 6mm<sup>2</sup> Brown
  - L2 6mm<sup>2</sup> Black
  - L3 6mm<sup>2</sup> Gray
  - N 6mm<sup>2</sup> Blue
  - PE 6mm<sup>2</sup> Yellow/Green
  - PP
  - CP 0.75mm<sup>2</sup> Red
- RC=220Ω±3%




Laser Printing Front Note:

**DEGSON**<sup>®</sup>

Laser Printing Back Note (Arial):

MEAC-T-032A-V-03-5.0M-10AH  
 32A 440V AC  
 IEC 62196-2:2016  
 IP54  
 201XXXXX-XXXX

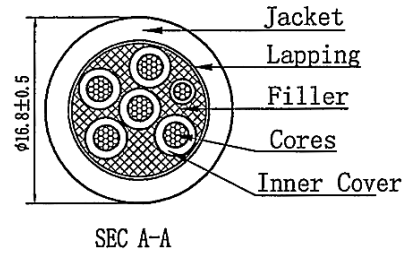

Technical parameters	
Rated voltage	440V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC
Withstanding voltage	L, N AND PE >2500V AC
	L AND N >2500V AC
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

PART NO.:/	
APPD:	ZX 20190529
CHKD:	Lu Luo
DRPT:	XF LUO 2019-05-29
THIRD ANGLE PROJECTION	

宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
NAME: Vehicle Connector (32A AC three phase) MEAC-T-032A-V-03-5.0M-10AH	
TITLE: Customer Drawing	REV DO-1
DRAWING NO.: MEAC-T-032A-C02	SHEET 1/1
DO NOT SCALE DRAWING	SCALE 1:3

- NOTES:
- Cable: EN50620-2017 EV 5\*6mm<sup>2</sup>+1\*0.75mm<sup>2</sup> Black
  - RoHS Compliance