


Quick Product Information

Series	Dielectric	Size	Capacitance	Rated voltage	Page
General Purpose Caps	NPO	0402, 0603, 0805, 1206, 1210, 1812	0.5pF~0.039μF	16V, 25V, 50V, 100V	4
	X7R	0402, 0603, 0805, 1206, 1210, 1812	100pF~1μF	10V, 16V, 25V, 50V, 100V	5
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.01μF~1μF	10V, 16V, 25V, 50V, 100V	6
High Capacitance Caps	X7R	0402, 0603, 0805, 1206, 1210, 1812	0.1μF~4.7μF	10V, 16V, 25V, 50V	8
	X5R	0402, 0603, 0805, 1206	0.027μF~10μF	6.3V, 10V, 16V	8
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.15μF~47μF	6.3V, 10V, 16V, 25V, 35V, 50V	8
Middle & High Voltage Caps	NPO	0603, 0805, 1206, 1210, 1808, 1812	0.5pF~6800pF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	10
	X7R	0805, 1206, 1210, 1808, 1812	100pF~0.47μF	200V, 250V, 500V, 630V, 1kV, 1.5kV, 2kV, 3kV	12
	Y5V	0805, 1206, 1210, 1812	0.01μF~0.68μF	200V, 250V	13
Low Profile Caps	X5R	0805, 1206, 1210	1μF~4.7μF	6.3V, 10V	14
	Y5V	0805, 1206, 1210	2.2μF~10μF	10V, 16V	14
Ultra-small Caps	NPO	0201	0.5pF~100pF	16V, 25V	15
	X7R	0201	100pF~4700pF	16V, 25V, 50V	15
	X5R	0201	1000pF~0.022μF	6.3V, 10V, 16V	15
Safety Certificated Caps (X1/Y2)	NPO	1808, 1812	10pF~470pF	250Vac	16
Safety Certificated Caps (X2/Y3)	NPO	1808, 1812	3.9pF~1000pF	250Vac	18
	X7R	1808, 1812	150pF~4700pF	250Vac	18
High Q & Low ESR Caps	NPO	0402, 0603	0.5pF~3300pF	16V, 25V, 50V, 100V	20
Microwave Caps	NPO	0402, 0603	0.1pF~22pF	50V	22
Capacitor Arrays	NPO	0612 (4x0603)	10pF~470pF	50V	23
	X7R	0612 (4x0603)	180pF~0.1μF	50V	23
	Y5V	0612	0.01μF~0.15μF	50V	23

The Outlines and External Dimensions of Capacitor


Single Chip Capacitors

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Remark	M _B (mm)
	0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03	L	#	0.15±0.05
	0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	#	0.25 +0.05/-0.10
	0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S		0.40±0.15
		1.60 +0.15/-0.10	0.80 +0.15/-0.10	0.80 +0.15/-0.10	X		
	0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10	A		0.50±0.20
				0.80±0.10	B		
				1.25±0.10	D	#	
	1206 (3216)	3.20±0.15	1.60±0.15	1.25±0.20	I	#	0.60±0.20
				0.80±0.10	B		
				0.95±0.10	C		
				1.15±0.15	J	#	
				1.25±0.10	D	#	
			1.60±0.20	1.60±0.20	G	#	
	1210 (3225)	3.20+0.30/-0.10	1.60+0.30/-0.10	1.60+0.30/-0.10	P	#	0.75±0.25
		3.20±0.30	2.50±0.20	0.95±0.10	C	#	
				1.25±0.10	D	#	
		3.20±0.40	2.50±0.30	1.60±0.20	G	#	
				2.00±0.20	K	#	
	1808 (4520)	4.50±0.40	2.03±0.25	2.50±0.30	M	#	0.75±0.25*
				1.25±0.10	D	#	
	1812 (4532)	4.50±0.40	3.20±0.30	2.00±0.20	K	#	0.75±0.25*
				1.25±0.10	D	#	

Reflow soldering only is recommended.

* For safety certificated products, please refer to individual data sheet for detail.

Capacitor Arrays

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		S (mm)	BW (mm)	P (mm)
	0612 (1632)	3.20±0.15	1.60±0.15	0.80±0.10	B	0.30±0.20	0.40±0.15	0.80±0.15

Reflow soldering only.

General Purpose Capacitors

■ HOW TO ORDER

U	1206	F	104	Z	C	T
Rated voltage	Size	Dielectric	Capacitance	Tolerance	Termination	Packaging
N=10 VDC B=16 VDC T=25 VDC U=50 VDC A=100 VDC	Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	C=NP0 (COG) R=X7R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 010=1.0pF 104=10x10 ⁴ =100nF	B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	C=Lead-Free	B=Bulk T=7" reeled

■ INTERNAL SAP SYSTEM PART NUMBER

1206	F	104	Z	500	C	T
Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	N=NP0 (COG) B=X7R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=4.7pF 0R5=0.5pF 1R0=1.0pF 104=10x10 ⁴ =100nF	B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC	L=Ag/Ni/Sn (for NP0 dielectric) C=Cu/Ni/Sn (for X7R, Y5V dielectric)	B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80±0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	1.60±0.30/-0.10	P	-	-	2k	-
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.50±0.30	M	-	-	1k	-
1812 (4532)	1.25±0.10	D	-	-	1k	-
	2.00±0.20	K	-	-	1k	-

Unit: pieces

General Purpose Capacitors

■ CAPACITANCE RANGE

NP0 Dielectric

Dielectric		NP0																		
Size		0402				0603			0805				1206			1210			1812	
Rated Voltage (VDC)		16	25	50	100	16	50	100	16	25	50	100	16	50	100	16	50	100	50	100
Capacitance	0.5pF (0R5)			N	N		S	S			A	A								
	0.6pF (0R6)			N	N		S	S			A	A								
	0.7pF (0R7)			N	N		S	S			A	A								
	0.8pF (0R8)			N	N		S	S			A	A								
	0.9pF (0R9)			N	N		S	S			A	A								
	1.0pF (1R0)			N	N		S	S			A	A								
	1.2pF (1R2)			N	N		S	S			A	A								
	1.5pF (1R5)			N	N		S	S			A	A		B	B					
	1.8pF (1R8)			N	N		S	S			A	A		B	B					
	2.2pF (2R2)			N	N		S	S			A	A		B	B					
	2.7pF (2R7)			N	N		S	S			A	A		B	B					
	3.3pF (3R3)			N	N		S	S			A	A		B	B					
	3.9pF (3R9)			N	N		S	S			A	A		B	B					
	4.7pF (4R7)			N	N		S	S			A	A		B	B					
	5.6pF (5R6)			N	N		S	S			A	A		B	B					
	6.8pF (6R8)			N	N		S	S			A	A		B	B					
	8.2pF (8R2)			N	N		S	S			A	A		B	B					
	10pF (100)			N	N		S	S			A	A		B	B			C		D
	12pF (120)			N	N		S	S			A	A		B	B			C		D
	15pF (150)			N	N		S	S			A	A		B	B			C		D
	18pF (180)			N	N		S	S			A	A		B	B			C		D
	22pF (220)			N	N		S	S			A	A		B	B		C	C		D
	27pF (270)			N	N		S	S			A	A		B	B		C	C		D
	33pF (330)			N	N		S	S			A	A		B	B		C	C		D
	39pF (390)			N	N		S	S			A	A		B	B		C	C		D
	47pF (470)			N	N		S	S			A	A		B	B		C	C		D
	56pF (560)			N			S	S			A	A		B	B		C	C		D
	68pF (680)			N			S	S			A	A		B	B		C	C		D
	82pF (820)			N			S	S			A	A		B	B		C	C		D
	100pF (101)			N			S	S			A	A		B	B		C	C		D
	120pF (121)			N			S	S			A	A		B	B		C	C		D
	150pF (151)			N			S	S			A	A		B	B		C	C		D
	180pF (181)		N	N			S	S			A	A		B	B		C	C		D
	220pF (221)		N	N			S	S			A	A		B	B		C	C		D
	270pF (271)	N					S	S			A	A		B	B		C	C		D
	330pF (331)	N					S	S			A	A		B	B		C	C		D
	390pF (391)	N					S	S			B	B		B	B		C	C		D
	470pF (471)	N					S	S			B	B		B	B		C	C		D
	560pF (561)						S	S			B	B		B	B		C	C		D
	680pF (681)						S				B	B		B	B		C	C		D
	820pF (821)						S				B	B		B	B		C	C		D
	1,000pF (102)						S				B	B		B	B		C	C	D	D
	1,200pF (122)					S					B	B		B	B		C	C	D	D
	1,500pF (152)					S					B	B		B	B		C	C	D	D
	1,800pF (182)					S					B	B		B	B		C	C	D	D
	2,200pF (222)					S					B	B		B	B		C	C	D	D
	2,700pF (272)					S					D	D		B	B		C	C	D	D
	3,300pF (332)					S					D	D		B	B		C	C	D	D
3,900pF (392)										D	D		B	B		C	C	D	D	
4,700pF (472)									D	D			B	B		C	C	D	D	
5,600pF (562)								D					B	B		C	C	D	D	
6,800pF (682)								D					C	C		C	C	D	D	
8,200pF (822)								D					C	C		C	C	D	D	
0.010μF (103)								D					D			C	C	D	D	
0.012μF (123)								D					D	P		C	D	D	D	
0.015μF (153)													D	P		C	D	D	D	
0.018μF (183)													D					D	D	
0.022μF (223)													D					D	D	
0.027μF (273)													D					D	D	
0.033μF (333)													D					D	D	
0.039μF (393)													G							

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.



www.pan-overseas.com

General Purpose Capacitors

X7R Dielectric

Dielectric		X7R																									
Size	0402				0603					0805					1206				1210			1812					
Rated Voltage (VDC)	10	16	25	50	10	16	25	50	100	10	16	25	50	100	16	25	50	100	25	50	100	25	50	100			
Capacitance	100pF (101)			N				S	S				B	B													
	120pF (121)			N				S	S				B	B													
	150pF (151)			N				S	S				B	B			B	B									
	180pF (181)			N				S	S				B	B			B	B									
	220pF (221)			N				S	S				B	B			B	B									
	270pF (271)			N				S	S				B	B			B	B									
	330pF (331)			N				S	S				B	B			B	B									
	390pF (391)			N				S	S				B	B			B	B									
	470pF (471)			N				S	S				B	B			B	B									
	560pF (561)			N				S	S				B	B			B	B									
	680pF (681)			N				S	S				B	B			B	B									
	820pF (821)			N				S	S				B	B			B	B									
	1,000pF (102)			N				S	S				B	B			B	B		C	C		D	D			
	1,200pF (122)			N				S	S				B	B			B	B		C	C		D	D			
	1,500pF (152)			N				S	S				B	B			B	B		C	C		D	D			
	1,800pF (182)			N				S	S				B	B			B	B		C	C		D	D			
	2,200pF (222)			N				S	S				B	B			B	B		C	C		D	D			
	2,700pF (272)			N				S	S				B	B			B	B		C	C		D	D			
	3,300pF (332)			N				S	S				B	B			B	B		C	C		D	D			
	3,900pF (392)			N				S	S				B	B			B	B		C	C		D	D			
	4,700pF (472)			N				S	S				B	B			B	B		C	C		D	D			
	5,600pF (562)			N				S	S				B	B			B	B		C	C		D	D			
	6,800pF (682)			N				S	S				B	B			B	B		C	C		D	D			
	8,200pF (822)			N				S	S				B	B			B	B		C	C		D	D			
	0.010μF (103)			N				S	S				B	B			B	B		C	C		D	D			
	0.012μF (123)		N	N				S					B	B			B	B		C	C		D	D			
	0.015μF (153)		N	N				S					B	B			B	B		C	C		D	D			
	0.018μF (183)		N	N				S					B	B			B	B		C	C		D	D			
	0.022μF (223)		N	N				S					B	B			B	B		C	C		D	D			
	0.027μF (273)	N						S					B	D			B	B		C	C		D	D			
	0.033μF (333)	N						S	X				B	D			B	B		C	C		D	D			
	0.039μF (393)	N						S	X				B	D			B	B		C	C		D	D			
	0.047μF (473)	N						S	X				B	D			B	B		C	C		D	D			
	0.056μF (563)	N						S	X				B				B	B		C	C		D	D			
	0.068μF (683)	N						S	X				B				B	B		C	C		D	D			
	0.082μF (823)	N					S	S	X				B	B			B	D		C	C		D	D			
	0.10μF (104)	N					S	S	X				B	B			B	D		C	C		D	D			
	0.12μF (124)					S	S						B	D			B	D		C	C		D	D			
	0.15μF (154)					S	S						D	D				C	G		C	D		D	D		
	0.18μF (184)					S	S						D					C	G		C	D		D	D		
	0.22μF (224)					S	S						D					C	G		C	D		D	D		
	0.27μF (274)					X							D					C	D		C	G		D	D		
	0.33μF (334)					X							D					C	D		C	D	G		D	D	
	0.39μF (394)					X						D	D				C	J	P		C	D	M		D	D	
	0.47μF (474)					X						D	D				J	J	P		C	D	M		D	K	
	0.56μF (564)											D	D				J	J	P		D	D	M		D	K	
	0.68μF (684)										D	D	D				J	J	P		D	D		D	K	K	
	0.82μF (824)										D	D	D				J	J	P		D	D		D	K	K	
	1.0μF (105)										D	D	D				J	J	P		D	D		D	K	K	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

■ CAPACITANCE RANGE

Y5V Dielectric (0402,0603,0805,Sizes)

Dielectric		Y5V											
Size		0402				0603				0805			
Rated Voltage (VDC)		10	16	25	50	10	16	25	50	16	25	50	100
Capacitance	0.010μF (103)				N				S			A	B
	0.015μF (153)				N				S			A	B
	0.022μF (223)				N				S			A	B
	0.033μF (333)				N				S			A	B
	0.047μF (473)			N					S			A	B
	0.068μF (683)		N	N					S			A	B
	0.10μF (104)		N	N					S			A	B
	0.15μF (154)	N							S			A	B
	0.22μF (224)	N						S				A	
	0.33μF (334)							S				B	
	0.47μF (474)						S				B	B	
	0.68μF (684)					S	X			B	D		
	1.0μF (105)					S	X			B	D		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Y5V Dielectric (1206,1210,1812 Sizes)

Dielectric		Y5V						
Size		1206			1210		1812	
Rated Voltage (VDC)		25	50	100	50	100	50	100
Capacitance	0.010μF (103)	B	B	B		C		D
	0.015μF (153)	B	B	B		C		D
	0.022μF (223)	B	B	B		C		D
	0.033μF (333)	B	B	B		C		D
	0.047μF (473)	B	B	B		C		D
	0.068μF (683)	B	B	B		C		D
	0.10μF (104)	B	B	B	C	C	D	D
	0.15μF (154)	B	B	C	C	C	D	D
	0.22μF (224)	B	B	C	C	C	D	D
	0.33μF (334)	B	B		C	C	D	D
	0.47μF (474)	B	B		C		D	D
	0.68μF (684)	B	B		C		D	D
1.0μF (105)	C	C		C		D	D	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

High Capacitance Capacitors

■ HOW TO ORDER

N	1206	F	106	Z	C	T
Rated voltage	Size	Dielectric	Capacitance	Tolerance	Termination	Packaging
K=6.3 VDC N=10 VDC B=16 VDC T=20 VDC U=50 VDC	Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	R=X7R X=X5R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 106=10x10 ⁶ =10μF	K=±10% M=±20% Z=-20/+80%	C:Lead-Free	B=Bulk T=7" reeled

■ INTERNAL SAP SYSTEM PART NUMBER

1206	F	106	Z	100	C	T
Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	B=X7R X=X5R S=X6S F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 106=10x10 ⁶ =10μF	K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC	C=Cu/Ni/Sn	B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k
1206 (3216)	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	1.60+0.30/-0.10	P	-	-	2k	-
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.00±0.20	K	-	-	1k	-
1812 (4532)	1.25±0.10	D	-	-	1k	-
	2.00±0.20	K	-	-	1k	-

Unit: pieces

High Capacitance Capacitors

■ CAPACITANCE RANGE

X7R Dielectric

Dielectric		X7R															
Size		0402	0603				0805			1206				1210		1812	
Rated Voltage (VDC)		10	10	16	25	50	10	16	25	10	16	25	50	25	50	25	50
Capacitance	0.10μF (104)	N		S	S	X											
	0.15μF (154)		S	S													
	0.22μF (224)		S	S													
	0.33μF (334)		X	X													
	0.47μF (474)		X	X													
	0.68μF (684)																
	1.0μF (105)		X				D	D	D		J	J	P	D	D	D	K
	1.5μF (155)																
	2.2μF (225)									J	J	P		G			
	3.3μF (335)									P							
	4.7μF (475)									P							

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact POEI local representative.

X5R Dielectric

Dielectric		X5R									
Size		0402			0603			0805	1206		
Rated Voltage (VDC)		6.3	10	16	6.3	10	16	6.3	6.3	10	16
Capacitance	0.027 μ F (273)			N							
	0.033 μ F (333)			N							
	0.039 μ F (393)			N							
	0.047 μ F (473)			N							
	0.056 μ F (563)		N	N							
	0.068 μ F (683)		N	N							
	0.082 μ F (823)		N	N							
	0.10 μ F (104)		N	N							
	0.15 μ F (154)										
	0.22 μ F (224)	N*									
	0.33 μ F (334)					X	X				
	0.47 μ F (474)					X	X				
	0.68 μ F (684)				X	X	X				
	1.0 μ F (105)				X	X					
	1.5 μ F (155)										J
	2.2 μ F (225)							I		J	J
	3.3 μ F (335)									P	P
	4.7 μ F (475)							I		P	P
	6.8 μ F (685)								P	P	
	10 μ F (106)							I	P	P	

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "*" mark is expressed product also available for X6S dielectric.
3. The gray cell is expressed that product is under development, please contact POEI local representative to inquire more information.

Y5V Dielectric

Dielectric		Y5V																	
Size		0402		0603		0805			1206				1210					1812	
Rated Voltage (VDC)		6.3	10	10	16	10	16	25	10	16	25	50	10	16	25	35	50	25	50
Capacitance	0.15μF (154)		N																
	0.22μF (224)		N																
	0.33μF (334)	N																	
	0.47μF (474)	N																	
	0.68μF (684)	N																	
	1.0μF (105)	N		S	X	B	B	D		C	C	C					C		D
	1.5μF (155)			S		D	D			C	C				C				D
	2.2μF (225)			S		D	D			C	C				C				D
	3.3μF (335)					D	D		J	J	J				C				D
	4.7μF (475)					D	D		J	J	J			C	D				D
	6.8μF (685)					I			J	J				C	G				D
	10μF (106)					I			J	J				D	G	K		D	
	22μF (226)								P				K						
	47μF (476)												K						

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact POEI local representative.

Middle and High Voltage Capacitors

INTERNAL SAP SYSTEM PART NUMBER

1808	N	100	G	202	L	T
Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Inch (mm) 0603(1608) 0805 (2012) 1206 (3216) 1210 (3225) 1808 (4520) 1812 (4532)	N=NPO (COG) B=X7R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	B=±0.1pF C=±0.25pF D=±0.5pF G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 201=200 VDC 251=250 VDC 501=500 VDC 631=630 VDC 102=1000 VDC 152=1500 VDC 202=2000 VDC 302=3000 VDC	L=Ag/Ni/Sn (for NPO dielectric) C=Cu/Ni/Sn (for X7R*, Y5V dielectric)	B=Bulk T=7" reeled G=13" reeled

* Partial X7R items are with Ag/Ni/Sn terminations, please ref to below product range of X7R dielectric for detail.

INTERNAL SAP SYSTEM PART NUMBER

1206	F	106	Z	100	C	T
Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	B=X7R X=X5R S=X6S F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 106=10x10 ⁶ =10μF	K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 201=200 VDC 251=250 VDC 501=500 VDC 531=630 VDC 102=1000 VDC 152=1500 VDC 202=2000 VDC 302=3000 VDC	C=Cu/Ni/Sn	B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0603 (1608)	0.80±0.07	S	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.50±0.30	M	-	-	1k	-
1808 (4520)	1.25±0.10	D	-	-	2k	-
	2.00±0.20	K	-	-	1k	-
1812 (4532)	1.25±0.10	D	-	-	1k	-
	2.00±0.20	K	-	-	1k	-

Unit: pieces

Middle and High Voltage Capacitors

■ CAPACITANCE RANGE

NP0 Dielectric 200V to 630V

Dielectric		NP0																	
Size		0603		0805				1206				1210				1812			
Rated Voltage (VDC)		200	250	200	250	500	630	200	250	500	630	200	250	500	630	200	250	500	630
Capacitance	0.5pF (0R5)			A	A	A	A												
	1.0pF (1R0)			A	A	A	A												
	1.2pF (1R2)			A	A	A	A												
	1.5pF (1R5)			A	A	A	A	B	B	B	B								
	1.8pF (1R8)			A	A	A	A	B	B	B	B								
	2.2pF (2R2)			A	A	A	A	B	B	B	B								
	2.7pF (2R7)			A	A	A	A	B	B	B	B								
	3.3pF (3R3)			A	A	A	A	B	B	B	B								
	3.9pF (3R9)			A	A	A	A	B	B	B	B								
	4.7pF (4R7)			A	A	A	A	B	B	B	B								
	5.6pF (5R6)			A	A	A	A	B	B	B	B								
	6.8pF (6R8)			A	A	A	A	B	B	B	B								
	8.2pF (8R2)			A	A	A	A	B	B	B	B								
	10pF (100)			A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	12pF (120)			A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	15pF (150)			A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	18pF (180)			A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	22pF (220)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	27pF (270)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	33pF (330)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	39pF (390)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	47pF (470)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	56pF (560)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	68pF (680)	S	S	A	A	A	A	B	B	B	B	C	C	C	C	D	D	D	D
	82pF (820)	S	S	A	A	B	B	B	B	B	B	C	C	C	C	D	D	D	D
	100pF (101)	S	S	A	A	B	B	B	B	B	B	C	C	C	C	D	D	D	D
	120pF (121)			A	A	D	D	B	B	B	B	C	C	C	C	D	D	D	D
	150pF (151)			B	B	D	D	B	B	B	B	C	C	C	C	D	D	D	D
	180pF (181)			B	B	D	D	B	B	B	B	C	C	C	C	D	D	D	D
	220pF (221)			D	D	D	D	B	B	B	B	C	C	C	C	D	D	D	D
	270pF (271)			D	D	D	D	B	B	C	C	C	C	C	C	D	D	D	D
	330pF (331)			D	D	D	D	B	B	C	C	C	C	C	C	D	D	D	D
	390pF (391)			D	D	D	D	B	B	C	C	C	C	C	C	D	D	D	D
	470pF (471)			D				C	C	C	C	C	C	C	C	D	D	D	D
	560pF (561)			D				C	C	C	C	C	C	C	C	D	D	D	D
	680pF (681)			D				C	C	C	C	C	C	C	C	D	D	D	D
	820pF (821)			D				C	D	D	D	C	C	C	C	D	D	D	D
	1,000pF (102)							C	G	G	G	C	C	C	C	D	D	D	D
	1,200pF (122)							C				D	D	D	D	D	D	D	D
	1,500pF (152)							C				D	D	D	D	D	D	D	D
	1,800pF (182)							D				D	D	D	D	D	D	D	D
	2,200pF (222)							D				D	D			D	D	D	D
	2,700pF (272)											D	D			D	D	D	D
	3,300pF (332)											D				D	D	D	D
	3,900pF (392)											D				D			
	4,700pF (472)															D			
	5,600pF (562)															D			
	6,800pF (682)															D			

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Middle and High Voltage Capacitors

NP0 Dielectric 1kV to 3kV

Dielectric		NP0									
Size		1206		1210		1808			1812		
Rated Voltage (VDC)		1000	2000	1000	2000	1000	2000	3000	1000	2000	3000
Capacitance	1.5pF (1R5)	B	B								
	1.8pF (1R8)	B	B								
	2.2pF (2R2)	B	B			D	D	D			
	2.7pF (2R7)	B	B			D	D	D			
	3.3pF (3R3)	B	B			D	D	D			
	3.9pF (3R9)	B	B			D	D	D			
	4.7pF (4R7)	B	B			D	D	D			
	5.6pF (5R6)	B	B			D	D	D			
	6.8pF (6R8)	B	B			D	D	D			
	8.2pF (8R2)	B	B			D	D	D			
	10pF (100)	B	B	C	C	D	D	D	D	D	D
	12pF (120)	B	B	C	C	D	D	D	D	D	D
	15pF (150)	B	B	C	C	D	D	D	D	D	D
	18pF (180)	B	B	C	C	D	D	D	D	D	D
	22pF (220)	B	B	C	C	D	D	D	D	D	D
	27pF (270)	B	B	C	C	D	D	D	D	D	D
	33pF (330)	B	B	C	C	D	D	D	D	D	D
	39pF (390)	B	B	C	C	D	D	D	D	D	D
	47pF (470)	B	B	C	C	D	D	D	D	D	D
	56pF (560)	B	B	C	D	D	D	D	D	D	D
	68pF (680)	B	C	C	D	D	D	D	D	D	D
	82pF (820)	B	C	C	D	D	D	D	D	D	D
	100pF (101)	B	C	C	D	D	D	D	D	D	D
	120pF (121)	B	D	C	D	D	D	D	D	D	D
	150pF (151)	C	D	C	D	D	D	D	D	D	D
	180pF (181)	C	G	C	D	D	D	K	D	D	D
	220pF (221)	D	G	C	D	D	D	K	D	D	D
	270pF (271)	D		C		D	D	K	D	D	K
	330pF (331)	G		D		D	D		D	D	K
	390pF (391)	G		D		D	K		D	D	K
	470pF (471)	G		D		D	K		D	D	K
	560pF (561)					K	K		D	D	
	680pF (681)					K	K		D	K	
	820pF (821)					K			D	K	
	1,000pF (102)					K			K	K	
	1,200pF (122)								K		
	1,500pF (152)								K		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Middle and High Voltage Capacitors

X7R Dielectric 200V to 630V

Dielectric		X7R															
Size		0805				1206				1210				1812			
Rated Voltage (VDC)		200	250	500	630	200	250	500	630	200	250	500	630	200	250	500	630
Capacitance	100pF (101)	B	B	B^	B^												
	120pF (121)	B	B	B^	B^												
	150pF (151)	B	B	B^	B^	B	B	B^	B^								
	180pF (181)	B	B	B^	B^	B	B	B^	B^								
	220pF (221)	B	B	B^	B^	B	B	B^	B^								
	270pF (271)	B	B	B^	B^	B	B	B^	B^								
	330pF (331)	B	B	B^	B^	B	B	B^	B^								
	390pF (391)	B	B	B^	B^	B	B	B^	B^								
	470pF (471)	B	B	B^	B^	B	B	B^	B^								
	560pF (561)	B	B	B^	B^	B	B	B^	B^								
	680pF (681)	B	B	B^	B^	B	B	B^	B^								
	820pF (821)	B	B	B^	B^	B	B	B^	B^								
	1,000pF (102)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	1,200pF (122)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	1,500pF (152)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	1,800pF (182)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	2,200pF (222)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	2,700pF (272)	B	B	B^	B^	B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	3,300pF (332)	B	B			B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	3,900pF (392)	B	B			B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	4,700pF (472)	B	B			B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	5,600pF (562)	D	D			B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	6,800pF (682)	D	D			B	B	B^	B^	C	C	C^	C^	D	D	D^	D^
	8,200pF (822)	D	D			B	B	C^	C^	C	C	C^	C^	D	D	D^	D^
	0.010μF (103)	D	D			B	B	C^	C^	C	C	C^	C^	D	D	D^	D^
	0.012μF (123)	D	D			B	B	D^	D^	C	C	C^	C^	D	D	D^	D^
	0.015μF (153)	D	D			C	C	D^	D^	C	C	C^	C^	D	D	D^	D^
	0.018μF (183)	D	D			C	C	D^	D^	C	C	C^	C^	D	D	D^	D^
	0.022μF (223)	D	D			C	C	G^	G^	C	C	D^	D^	D	D	D^	D^
	0.027μF (273)					C	C	G^	G^	C	C	G^	G^	D	D	D^	D^
	0.033μF (333)					G	G	G^	G^	C	C	G^	G^	D	D	D^	D^
	0.039μF (393)					G	G			C	C	G^	G^	D	D	D^	D^
	0.047μF (473)					G	G			D	D	G^	G^	D	D	D^	D^
	0.056μF (563)					G	G			D	D	G^	G^	D	D	K^	K^
	0.068μF (683)					G	G			G	G			D	D	K^	K^
	0.082μF (823)					G	G			G	G			D	D	K^	K^
	0.10μF (104)					G	G			G	G			D	D	K^	K^
	0.12μF (124)									G	G			D	D		
	0.15μF (154)									M	M			K	K		
	0.18μF (184)									M	M			K	K		
	0.22μF (224)									M	M			K	K		
	0.27μF (274)													K	K		
	0.33μF (334)													K	K		
	0.39μF (394)													K	K		
	0.47μF (474)													K	K		

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with “^” mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact POE local representative.

Middle and High Voltage Capacitors

X7R Dielectric 1kV to 3kV

Dielectric		X7R										
Size		1206			1210	1808				1812		
Rated Voltage (VDC)		1000	1500	2000	1000	1000	1500	2000	3000	1000	2000	3000
Capacitance	150pF (151)	B^	B^	B^		D^	D^	D^				
	180pF (181)	B^	B^	B^		D^	D^	D^				
	220pF (221)	B^	B^	B^		D^	D^	D^				
	270pF (271)	B^	B^	B^		D^	D^	D^		D^	D^	
	330pF (331)	B^	B^	B^		D^	D^	D^		D^	D^	
	390pF (391)	B^	B^	C^		D^	D^	D^		D^	D^	
	470pF (471)	B^	B^	C^		D^	D^	D^	K^	D^	D^	
	560pF (561)	B^	C^	C^		D^	D^	D^	K^	D^	D^	
	680pF (681)	B^	C^	C^		D^	D^	D^	K^	D^	D^	K^
	820pF (821)	B^	G^	G^		D^	D^	D^	K^	D^	D^	K^
	1,000pF (102)	B^	G^	G^	C^	D^	D^	K^	K^	D^	D^	K^
	1,200pF (122)	B^	G^		C^	D^	D^	K^		D^	D^	
	1,500pF (152)	C^	G^		C^	D^	D^	K^		D^	D^	
	1,800pF (182)	C^	G^		C^	D^	D^	K^		D^	D^	
	2,200pF (222)	D^	G^		C^	D^	D^	K^		D^	D^	
	2,700pF (272)	G^			C^	D^	D^			D^	D^	
	3,300pF (332)	G^			D^	D^	K^			D^	K^	
	3,900pF (392)	G^				D^				D^	K^	
	4,700pF (472)					D^				D^	K^	
	5,600pF (562)					K^				D^		
	6,800pF (682)					K^				D^		
	8,200pF (822)					K^				D^		
	0.010μF (103)					K^				D^		
	0.012μF (123)									K^		
	0.015μF (153)									K^		

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with “^” mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact POEI local representative.

Y5V Dielectric 200V to 250V

Dielectric		Y5V							
Size		0805		1206		1210		1812	
Rated Voltage (VDC)		200	250	200	250	200	250	200	250
Capacitance	0.010μF (103)	B	B	B	B	C	C	D	D
	0.015μF (153)	B	B	B	B	C	C	D	D
	0.022μF (223)	B	B	B	B	C	C	D	D
	0.033μF (333)	B	B	B	B	C	C	D	D
	0.047μF (473)	B	B	B	B	C	C	D	D
	0.068μF (683)	B	B	B	B	C	C	D	D
	0.10μF (104)			B	B	C	C	D	D
	0.15μF (154)			C	C	C	C	D	D
	0.22μF (224)							D	D
	0.33μF (334)							D	D
	0.47μF (474)							D	D
	0.68μF (684)							D	D
	1.0μF (105)								

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact POEI local representative.

Low Profile Capacitors

■ HOW TO ORDER

TT	31	X	225	M	100	C	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
TT=Low profile	21=0805 (2012) 31=1206 (3216) 32=1210 (3225)	X=X5R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 225=22x10 ⁵ =2,200,000pF =2.2μF	K=±10% M=±20% Z=+20/-80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC	C=Cu/Ni/Sn	B=Bulk T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness Max (mm)/Symbol		7" reel	
			Paper tape	Plastic tape
0805 (2012)	0.95	T	4k	-
1206 (3216)	0.95	T	4k	-
	1.25	J	-	3k
1210 (3225)	0.95	T	-	3k

Unit: pieces

■ CAPACITANCE RANGE

Dielectric	Size	Capacitance	Tolerance	Rated Voltage (VDC)	Thickness Max (mm)	Part Number
X5R	0805	1.0μF	±10%, ±20%	10	0.95	TT21X105□100CT
		4.7μF	±10%, ±20%	6.3	0.95	TT21X475□6R3CT
	1206	2.2μF	±10%, ±20%	10	0.95	TT31X225□100CT
		3.3μF	±10%, ±20%	10	0.95	TT32X335□100CT
		4.7μF	±10%, ±20%	10	0.95	TT32X475□100CT
Y5V	0805	2.2μF	-20/+80%	16	0.95	TT21F225Z160CT
		3.3μF	-20/+80%	10	0.95	TT21F335Z100CT
		4.7μF	-20/+80%	10	0.95	TT21F475Z100CT
		4.7μF	-20/+80%	16	0.95	TT31F475Z160CT
	1206	10μF	-20/+80%	10	0.95	TT31F106Z100CT
		10μF	-20/+80%	16	1.25	TT31F106Z160CT
		10μF	-20/+80%	10	0.95	TT32F106Z100CT
	1210	10μF	-20/+80%	10	0.95	TT32F106Z100CT

□ Please specify the capacitance tolerance code.

1. This series product is suited to reflow soldering process only.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Ultra-small 0201 Capacitors

■ HOW TO ORDER

0201	N	100	J	250	L	T
Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Inch (mm) 0201 (0603)	N=NP0 (C0G) B=X7R X=X5R S=X6S	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=4.7pF OR5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	C=±0.25pF D=±0.5pF J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 4R0=4 VDC 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC	L=Ag/Ni/Sn (for NP0 dielectric) C=Cu/Ni/Sn (for X7R, X5R, Y5V dielectric)	T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol	Paper tape	
		7" reel	13" reel
0201 (0603)	0.30±0.03 L	15K	-

Unit: pieces

■ CAPACITANCE RANGE

Size		0201	
Dielectric		NP0	
Rated Voltage (VDC)		16	25
0.5pF (0R5)			L
1.0pF (1R0)			L
1.2pF (1R2)			L
1.5pF (1R5)			L
1.8pF (1R8)			L
2.2pF (2R2)			L
2.7pF (2R7)			L
3.3pF (3R3)			L
3.9pF (3R9)			L
4.7pF (4R7)			L
5.6pF (5R6)			L
6.8pF (6R8)			L
8.2pF (8R2)			L
10pF (100)			L
12pF (120)			L
15pF (150)			L
18pF (180)			L
22pF (220)			L
27pF (270)			L
33pF (330)			L
39pF (390)			L
47pF (470)			L
56pF (560)	L	L	
68pF (680)	L	L	
82pF (820)	L	L	
100pF (101)	L	L	

Size		0201					
Dielectric		X7R			X5R		
Rated Voltage (VDC)		16V	25V	50V	6.3V	10V	16V
100pF (101)		L	L	L			
120pF (121)		L	L	L			
150pF (151)		L	L	L			
180pF (181)		L	L	L			
220pF (221)		L	L	L			
270pF (271)		L	L	L			
330pF (331)		L	L	L			
390pF (391)		L	L	L			
470pF (471)		L	L	L			
560pF (561)		L	L	L			
680pF (681)		L	L	L			
820pF (821)		L	L	L			
1,000pF (102)		L	L	L			
1,500pF (152)		L					L
2,200pF (222)		L					L
3,300pF (332)		L					L
4,700pF (472)		L					L
6,800pF (682)						L	
0.010μF (103)						L	
0.015μF (153)					L		
0.022μF (223)					L		
0.033μF (333)							
0.047μF (473)							
0.068μF (683)							
0.10μF (104)							

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "*" mark is expressed product also available for X6S dielectric.
3. The shadow cell is expressed that product is under development, please contact POEI local representative to inquire more information.

■ HOW TO ORDER

S2	42	N	100	J	302	L	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
S2=X1/Y2	42=1808 (4520) 43=1812 (4532)	N=NP0 (COG)	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 100=10x10 ⁰ =10pF	J=±5% K=±10%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 302=3000 VDC	L=Ag/Ni/Sn	B=Bulk T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		7" reel / Plastic tape
1808 (4520)	1.25±0.10	D	2k
	2.00±0.20	K	1k
1812 (4532)	1.25±0.10	D	1k
	2.00±0.20	K	1k

Unit: pieces

■ CAPACITANCE RANGE

Dielectric		NP0	
Rated voltage (VAC)		250	
Rated Voltage (VDC)		3000	
Size	1808	1812	
Capacitance	10pF (100)	D	
	12pF (120)	D	D
	15pF (150)	D	D
	18pF (180)	D	D
	22pF (220)	D	D
	27pF (270)	D	D
	33pF (330)	D	D
	39pF (390)	D	D
	47pF (470)	D	D
	56pF (560)	D	D
	68pF (680)	D	D
	82pF (820)	D	D
	100pF (101)	D	D
	120pF (121)	D	D
	150pF (151)	D	D
	180pF (181)	K	D
	220pF (221)	K	D
	270pF (271)	K	K
	330pF (331)		K
	390pF (391)		K
	470pF (471)		K

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

■ HOW TO ORDER

S3	42	N	100	J	202	L	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
S3=X2/Y3	42=1808 (4520) 43=1812 (4532)	N=NP0 (C0G) B=X7R	Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: R47=4.7pF OR5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	J=±5% K=±10%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 202=2000 VDC 302=3000 VDC	L=Ag/Ni/Sn	B=Bulk T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		7" reel / Plastic tape
1808 (4520)	1.25±0.10	D	2k
	2.00±0.20	K	1k
1812 (4532)	1.25±0.10	D	1k
	2.00±0.20	K	1k

Unit: pieces

Safety Certificated Capacitors X2/Y3

■ CAPACITANCE RANGE

NP0 Dielectric

Dielectric		NP0			
Size		1808		1812	
Rated voltage (VAC)		250		250	
Rated Voltage (VDC)		2000	3000	2000	3000
Capacitance	3.9pF (3R9)		D*		
	4.7pF (4R7)		D*		
	5.0pF (5R0)		D*		
	5.6pF (5R6)		D*		
	6.8pF (6R8)		D*		
	8.2pF (8R2)		D*		
	10pF (100)	D	D	D*	D*
	12pF (120)	D	D	D	D
	15pF (150)	D	D	D	D
	18pF (180)	D	D	D	D
	22pF (220)	D	D	D	D
	27pF (270)	D	D	D	D
	33pF (330)	D	D	D	D
	39pF (390)	D	D	D	D
	47pF (470)	D	D	D	D
	56pF (560)	D	D	D	D
	68pF (680)	D	D	D	D
	82pF (820)	D	D	D	D
	100pF (101)	D	D	D	D
	120pF (121)	D	D	D	D
	150pF (151)	D	D	D	D
	180pF (181)	D	K	D	D
	220pF (221)	D	K	D	D
	270pF (271)	D	K	D	K
	330pF (331)	D		D	K
	390pF (391)	K		D	K
	470pF (471)	K		D	K
	560pF (561)	K		D	
	680pF (681)	K		K	
	820pF (821)			K	
	1,000pF (102)			K	

"*" means it is only available for UL safety certificated.

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

X7R Dielectric

Dielectric		X7R			
Size		1808		1812	
Rated voltage (VAC)		250		250	
Rated Voltage (VDC)		2000	3000	2000	3000
Capacitance	150pF (151)	D			
	180pF (181)	D			
	220pF (221)	D			
	270pF (271)	D		D	
	330pF (331)	D		D	
	390pF (391)	D		D	
	470pF (471)	D		D	
	560pF (561)	D	K	D	
	680pF (681)	D	K	D	K
	820pF (821)	D	K	D	K
	1,000pF (102)	K	K	D	K
	1,200pF (122)	K		D	
	1,500pF (152)	K		D	
	1,800pF (182)	K		D	
	2,200pF (222)	K		D	
	2,700pF (272)			D	
	3,300pF (332)			K	
	3,900pF (392)			K	
	4,700pF (472)			K	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

High Q and Low ESR Capacitors

HOW TO ORDER



HH	15	N	100	G	500	L	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
HH= High Q/ Low ESR	15=0402 (1005) 18=0603 (1608)	N=NPO (COG)	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=4.7pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC	L=Ag/Ni/Sn	B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
0402	0.50±0.05	N	10K	20K
0603	0.80±0.07	S	4K	10K

Unit: pieces

ELECTRICAL CHARACTERISTICS

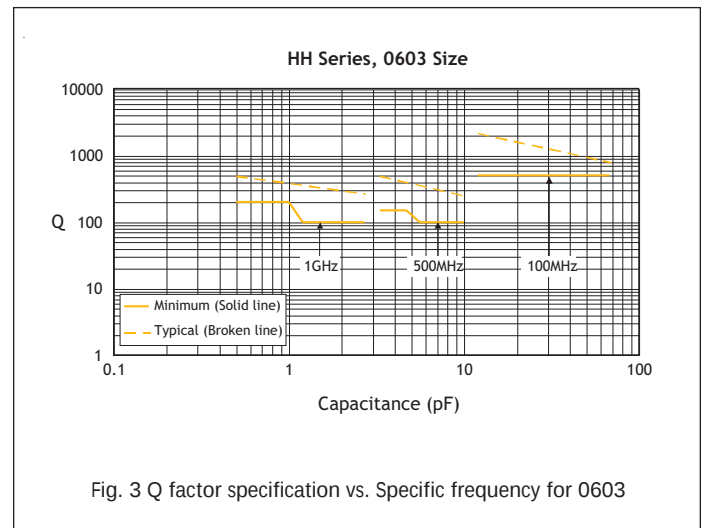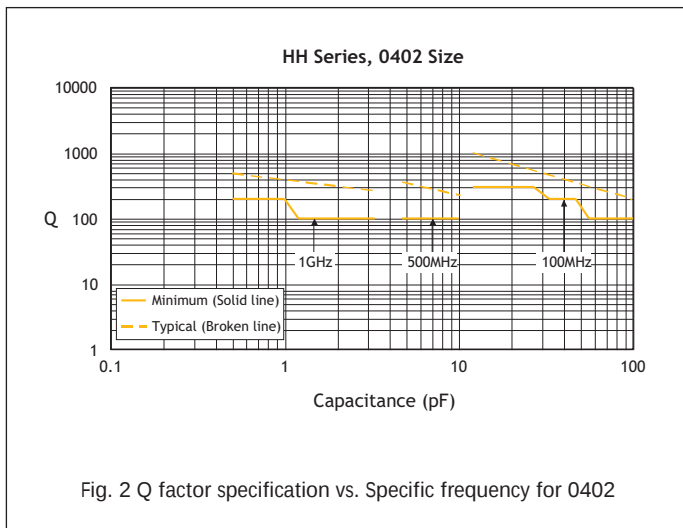

High Q and Low ESR Capacitors

■ CAPACITANCE RANGE

Dielectric		NPO					
Size		0402			0603		
Rated Voltage (VDC)		16	25	50	16	50	100
Capacitance	0.5pF (0R5)			N		S	S
	0.6pF (0R6)			N		S	S
	0.7pF (0R7)			N		S	S
	0.8pF (0R8)			N		S	S
	0.9pF (0R9)			N		S	S
	1.0pF (1R0)			N		S	S
	1.2pF (1R2)			N		S	S
	1.5pF (1R5)			N		S	S
	1.8pF (1R8)			N		S	S
	2.2pF (2R2)			N		S	S
	2.7pF (2R7)			N		S	S
	3.3pF (3R3)			N		S	S
	3.9pF (3R9)			N		S	S
	4.7pF (4R7)			N		S	S
	5.6pF (5R6)			N		S	S
	6.8pF (6R8)			N		S	S
	8.2pF (8R2)			N		S	S
	10pF (100)			N		S	S
	12pF (120)			N		S	S
	15pF (150)			N		S	S
	18pF (180)			N		S	S
	22pF (220)			N		S	S
	27pF (270)			N		S	S
	33pF (330)			N		S	S
	39pF (390)			N		S	S
	47pF (470)			N		S	S
	56pF (560)			N		S	S
	68pF (680)			N		S	S
	82pF (820)			N		S	S
	100pF (101)			N		S	S
	120pF (121)			N		S	S
	150pF (151)			N		S	S
	180pF (181)		N	N		S	S
	220pF (221)		N	N		S	S
	270pF (271)	N				S	S
	330pF (331)	N				S	S
	390pF (391)	N				S	S
	470pF (471)	N				S	S
	560pF (561)					S	
	680pF (681)					S	
	820pF (821)					S	
	1,000pF (102)					S	
	1,200pF (122)				S		
	1,500pF (152)				S		
	1,800pF (182)				S		
	2,200pF (222)				S		
	2,700pF (272)				S		
	3,300pF (332)				S		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

■ HOW TO ORDER



MW	15	N	100	G	500	L	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
MW=Microwave	15=0402 (1005) 18=0603 (1608)	N=NPO (C0J)	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=4.7pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	A=±0.05pF B=±0.1pF C=±0.25pF F=±1% G=±2% J=±5%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 500=50 VDC	L=Ag/Ni/Sn	B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
0402	0.50±0.05	N	10K	20K
0603	0.80±0.07	S	4K	10K

Unit: pieces

■ ELECTRICAL CHARACTERISTICS

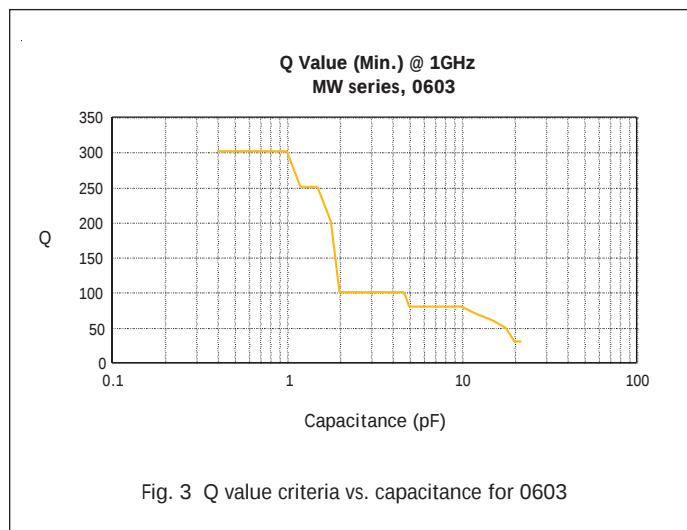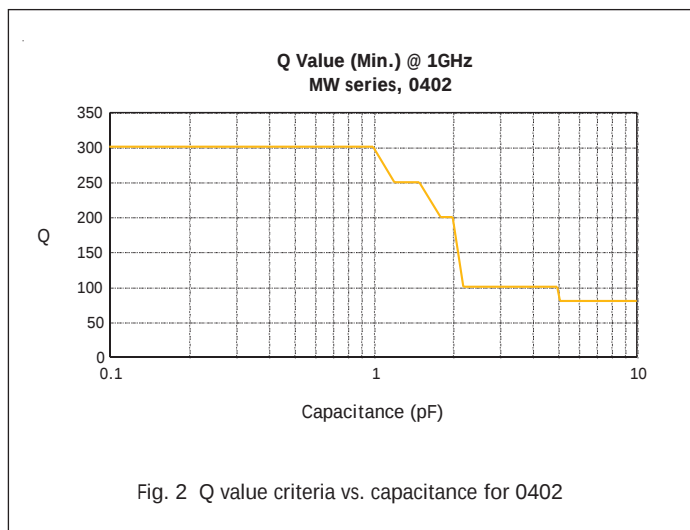

■ CAPACITANCE RANGE

Dielectric		NP0	
Size		0402	0603
Rated Voltage (VDC)		50	50
Capacitance	0.1pF (0R1)	N	
	0.2pF (0R2)	N	
	0.3pF (0R3)	N	
	0.4pF (0R4)	N	S
	0.5pF (0R5)	N	S
	0.6pF (0R6)	N	S
	0.7pF (0R7)	N	S
	0.8pF (0R8)	N	S
	0.9pF (0R9)	N	S
	1.0pF (1R0)	N	S
	1.2pF (1R2)	N	S
	1.5pF (1R5)	N	S
	1.8pF (1R8)	N	S
	2.0pF (2R0)	N	S
	2.2pF (2R2)	N	S
	2.7pF (2R7)	N	S
	3.0pF (3R0)	N	S
	3.3pF (3R3)	N	S
	3.9pF (3R9)	N	S
	4.0pF (4R0)	N	S
	4.7pF (4R7)	N	S
	5.0pF (5R0)	N	S
	5.6pF (5R6)	N	S
	6.0pF (6R0)	N	S
	6.8pF (6R8)	N	S
	7.0pF (7R0)	N	S
	8.0pF (8R0)	N	S
	8.2pF (8R2)	N	S
	9.0pF (9R0)	N	S
	10pF (100)	N	S
	12pF (120)		S
	15pF (150)		S
	18pF (180)		S
	22pF (220)		S

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Capacitor Arrays

HOW TO ORDER

Y	4C	3	B	103	K	500	C	T
Series	Cap. Nr.	Termination pitch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Y=Capacitor Array	4C=4xCap	3=0.03" pitch	N=NP0 (COG) B=X7R F=Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 103=10x10 ³ =10,000pF =10nF	J=±5% K=±10% M=±20% Z=+20/-80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 160=16 VDC 250=25 VDC 500=50 VDC	L=Ag/Ni/Sn (for NP0 dielectric) C=Cu/Ni/Sn (for X7R, Y5V dielectric)	T=7" reeled

PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
4 x 0603	0.80±0.10	B	4k	-

Unit: pieces

CAPACITANCE RANGE

Size		4 x 0603			
Dielectric		NP0	X7R		Y5V
Rated Voltage (VDC)		50	16	50	50
Capacitance	10pF (100)	B			
	15pF (150)	B			
	22pF (220)	B			
	33pF (330)	B			
	47pF (470)	B			
	68pF (680)	B			
	100pF (101)	B			
	150pF (151)	B			
	180pF (181)	B		B	
	220pF (221)	B		B	
	330pF (331)	B		B	
	470pF (471)	B		B	
	680pF (681)			B	
	1,000pF (102)			B	
	1,500pF (152)			B	
	2,200pF (222)			B	
	3,300pF (332)			B	
	4,700pF (472)			B	
	6,800pF (682)			B	
	0.010μF (103)			B	B
	0.015μF (153)		B		
	0.022μF (223)		B		B
	0.033μF (333)		B		
	0.047μF (473)		B		B
	0.068μF (683)		B		
	0.10μF (104)		B		B

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact POEI local representative.

Appendix I : Reliability Test Conditions and Requirements

NO.	Item	Test Condition	Requirements																																	
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.																																	
2.	Capacitance	Class I : NPO Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10%	* Shall not exceed the limits given in the detailed spec.																																	
3.	Q/ D.F. (Dissipation Factor)	Class II : X7R, X5R, Y5V Cap≤10μF, 1.0±0.2Vrms, 1KHz±10% Cap>10μF, 0.5±0.2Vrms, 120Hz±20%	NPO: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C X7R, X5R:																																	
			<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>2.5%</td><td>3.0%</td><td>All 0201;0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">3.5%</td><td>5.0%</td><td>0805≥1μF, 1210≥10μF</td></tr><tr><td>7.0%</td><td>0603≥0.33μF;TT series & Cap≥1μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">3.5%</td><td>5.0%</td><td>0402≥0.033μF;0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF</td></tr><tr><td>10%</td><td>TT series & Cap≥1μF</td></tr><tr><td>10V</td><td>5.0%</td><td>10.0%</td><td>TT series & Cap≥1μF;0805≥10μF</td></tr><tr><td>6.3V</td><td>10.0%</td><td>15.0%</td><td>0805≥22μF;1210≥100μF</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	2.5%	3.0%	All 0201;0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF	25V	3.5%	5.0%	0805≥1μF, 1210≥10μF	7.0%	0603≥0.33μF;TT series & Cap≥1μF	16V	3.5%	5.0%	0402≥0.033μF;0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF	10%	TT series & Cap≥1μF	10V	5.0%	10.0%	TT series & Cap≥1μF;0805≥10μF	6.3V	10.0%	15.0%	0805≥22μF;1210≥100μF					
			Rated vol.	D.F.≤	Exception of D.F.≤																															
			≥50V	2.5%	3.0%	All 0201;0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF																														
			25V	3.5%	5.0%	0805≥1μF, 1210≥10μF																														
					7.0%	0603≥0.33μF;TT series & Cap≥1μF																														
			16V	3.5%	5.0%	0402≥0.033μF;0603≥0.15μF; 0805≥0.68μF;1206≥2.2μF																														
					10%	TT series & Cap≥1μF																														
			10V	5.0%	10.0%	TT series & Cap≥1μF;0805≥10μF																														
			6.3V	10.0%	15.0%	0805≥22μF;1210≥100μF																														
Y5V:																																				
<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>5.0%</td><td>---</td><td>---</td></tr><tr><td>35V</td><td>7.0%</td><td>---</td><td>---</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">5.0%</td><td>7.0%</td><td>0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF</td></tr><tr><td>9.0%</td><td>0402≥0.068μF</td></tr><tr><td>9.0%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>16V (C<1.0μF)</td><td>7.0%</td><td>9.0%</td><td>0805≥4.7μF;1206≥10μF;1210≥22μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>9.0%</td><td>12.5%</td><td>---</td></tr><tr><td>10V</td><td>12.5%</td><td>---</td><td>---</td></tr><tr><td>6.3V</td><td>20.0%</td><td>---</td><td>---</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	5.0%	---	---	35V	7.0%	---	---	25V	5.0%	7.0%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF	9.0%	0402≥0.068μF	9.0%	0402≥0.068μF; 0603≥0.68μF	16V (C<1.0μF)	7.0%	9.0%	0805≥4.7μF;1206≥10μF;1210≥22μF	16V (C≥1.0μF)	9.0%	12.5%	---	10V	12.5%	---	---	6.3V	20.0%	---	---
Rated vol.	D.F.≤	Exception of D.F.≤																																		
≥50V	5.0%	---	---																																	
35V	7.0%	---	---																																	
25V	5.0%	7.0%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF																																	
		9.0%	0402≥0.068μF																																	
		9.0%	0402≥0.068μF; 0603≥0.68μF																																	
16V (C<1.0μF)	7.0%	9.0%	0805≥4.7μF;1206≥10μF;1210≥22μF																																	
16V (C≥1.0μF)	9.0%	12.5%	---																																	
10V	12.5%	---	---																																	
6.3V	20.0%	---	---																																	
4a.	Dielectric Strength	* To apply voltage (≤50V) 250%. * Duration : 1 to 5 sec. * Charge & discharge current less than 50mA. * To apply voltage : 100V ≥3 times V DC 200V ~ 300V ≥2 times V DC 500V ~ 999V ≥1.5 times V DC 1000V ~ 3000V ≥1.2 times V DC * Cut-off, set at 10mA * TEST= 15 sec. * RAMP=0	* No evidence of damage or flash over during test.																																	
4b.	Dielectric Strength (for X1/Y2 & X2/Y3)	* To apply 1500 VAC voltage. * Duration: 1 to 5 sec.	* No evidence of damage or flash over during test.																																	
5.	Insulation Resistance	To apply rated voltage for max. 120 sec.	≥10GΩ or RxC≥500Ω-F whichever is smaller.																																	
		Rated voltage: 100 ~ 500V	To apply rated voltage for 60 sec.	≥10GΩ																																
		Rated voltage: > 500V	To apply 500V for 60 sec.	≥10GΩ																																
6.	Temperature Coefficient	With no electrical load.																																		
		<table><tr><th>T.C.</th><th>Operating Temp</th></tr><tr><td>NPO (C0G)</td><td>-55~125°C at 25°C</td></tr><tr><td>NPO (C0J)</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr><tr><td>X5R</td><td>-55~85°C at 25°C</td></tr><tr><td>Y5V</td><td>-25~85°C at 20°C</td></tr></table>	T.C.	Operating Temp	NPO (C0G)	-55~125°C at 25°C	NPO (C0J)	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X5R	-55~85°C at 25°C	Y5V	-25~85°C at 20°C	<table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO (C0G)</td><td>Within ±30ppm/°C</td></tr><tr><td>NPO (C0J)</td><td>Within ±120ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr><tr><td>X5R</td><td>Within ±15%</td></tr><tr><td>Y5V</td><td>Within +30%/-80%</td></tr></table>	T.C.	Capacitance Change	NPO (C0G)	Within ±30ppm/°C	NPO (C0J)	Within ±120ppm/°C	X7R	Within ±15%	X5R	Within ±15%	Y5V	Within +30%/-80%									
T.C.	Operating Temp																																			
NPO (C0G)	-55~125°C at 25°C																																			
NPO (C0J)	-55~125°C at 25°C																																			
X7R	-55~125°C at 25°C																																			
X5R	-55~85°C at 25°C																																			
Y5V	-25~85°C at 20°C																																			
T.C.	Capacitance Change																																			
NPO (C0G)	Within ±30ppm/°C																																			
NPO (C0J)	Within ±120ppm/°C																																			
X7R	Within ±15%																																			
X5R	Within ±15%																																			
Y5V	Within +30%/-80%																																			
7.	Adhesive Strength of Termination	* Pressurizing force: 0201: 2N 0402 & 0603: 5N >0603: 10N * Test time: 10±1 sec.	* No remarkable damage or removal of the terminations.																																	
8.	Vibration Resistance	* Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.)	* No remarkable damage. * Cap change and Q/D.F.: To meet initial spec.																																	

Appendix I : Reliability Test Conditions and Requirements


NO.	Item	Test Condition	Requirements																																																																
9.	Solderability	* Solder temperature: 235±5°C * Dipping time: 2±0.5 sec.	95% min. coverage of all metalized area.																																																																
10.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NPO: within ±5.0% or ±0.5pF whichever is larger. X7R, X5R: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																																																																
11.	Resistance to Soldering Heat	* Solder temperature: 270±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in an eutectic solder. * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).	* No remarkable damage. * Cap change: NPO: within ±2.5% or ±0.25pF whichever is larger. X7R, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.																																																																
12.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table> * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	* No remarkable damage. * Cap change: NPO: within ±2.5% or ±0.25pF whichever is larger. X7R, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements.																																																	
Step	Temp. (°C)	Time (min.)																																																																	
1	Min. operating temp. +0/-3	30±3																																																																	
2	Room temp.	2~3																																																																	
3	Max. operating temp. +3/-0	30±3																																																																	
4	Room temp.	2~3																																																																	
13.	Humidity (Steady State)	* Test temp.: 40±2°C * Humidity: 90~95% RH * Test time: 500+24/-0hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).	* No remarkable damage. * Cap change: NPO: within ±5.0% or ±0.5pF whichever is larger. X7R, X5R: ≥10V, within ±12.5% 6.3V, within ±25% Y5V: within ±30% * Q/D.F. value: NPO: Cap≥30pF, Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C Cap<10pF; Q≥200+10C X7R, X5R: <table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>3.0%</td><td>6.0%</td><td>0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>25V</td><td>5.0%</td><td>10.0%</td><td>0805≥1μF, 1210≥10μF</td></tr><tr><td></td><td></td><td>14.0%</td><td>0603≥0.33μF</td></tr><tr><td>16V</td><td>5.0%</td><td>10.0%</td><td>0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF</td></tr><tr><td>10V</td><td>7.5%</td><td>15.0%</td><td>0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF</td></tr><tr><td>6.3V</td><td>15.0%</td><td>30.0%</td><td>0805≥10μF; 1210≥100μF</td></tr></table> Y5V: <table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>---</td><td>---</td></tr><tr><td>35V</td><td>10.0%</td><td>---</td><td>---</td></tr><tr><td>25V</td><td>7.5%</td><td>≤10.0%</td><td>0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF</td></tr><tr><td></td><td></td><td>≤12.5%</td><td>0402≥0.068μF</td></tr><tr><td>16V (C<1.0μF)</td><td>10.0%</td><td>≤12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>---</td><td>---</td></tr><tr><td>10V</td><td>15.0%</td><td>---</td><td>---</td></tr><tr><td>6.3V</td><td>30.0%</td><td>---</td><td>---</td></tr></table> * I.R.: ≥10V 1GΩ or 50Ω-F whichever is smaller. 6.3V, 10Ω-F	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	25V	5.0%	10.0%	0805≥1μF, 1210≥10μF			14.0%	0603≥0.33μF	16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF	10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF	6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	7.5%	---	---	35V	10.0%	---	---	25V	7.5%	≤10.0%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF			≤12.5%	0402≥0.068μF	16V (C<1.0μF)	10.0%	≤12.5%	0402≥0.068μF; 0603≥0.68μF	16V (C≥1.0μF)	12.5%	---	---	10V	15.0%	---	---	6.3V	30.0%	---	---
Rated vol.	D.F.≤	Exception of D.F.≤																																																																	
≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																																																
25V	5.0%	10.0%	0805≥1μF, 1210≥10μF																																																																
		14.0%	0603≥0.33μF																																																																
16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF																																																																
10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF																																																																
6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF																																																																
Rated vol.	D.F.≤	Exception of D.F.≤																																																																	
≥50V	7.5%	---	---																																																																
35V	10.0%	---	---																																																																
25V	7.5%	≤10.0%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF																																																																
		≤12.5%	0402≥0.068μF																																																																
16V (C<1.0μF)	10.0%	≤12.5%	0402≥0.068μF; 0603≥0.68μF																																																																
16V (C≥1.0μF)	12.5%	---	---																																																																
10V	15.0%	---	---																																																																
6.3V	30.0%	---	---																																																																

Appendix I : Reliability Test Conditions and Requirements

NO.	Item	Test Condition	Requirements																													
14.	Humidity Load (Damp Heat)	* Test temp.: 40±2°C * Humidity: 90~95%RH * Test time: 500+24/-0 hrs. * To apply voltage: rated voltage (Max. 500V) * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).	* No remarkable damage.																													
			* Cap change: NPO: within ±7.5% or ±0.75pF whichever is larger. X7R, X5R: ≥10V, within ±12.5% 6.3V, with ±25% Y5V: ≥10V, within ±30% 6.3V, within +30 to -40%																													
			* Q/D.F. value: NPO: Cap≥30pF, Q≥200; Cap<30pF, Q≥100+10/3C X7R, X5R:																													
			<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>3.0%</td><td>6.0%</td><td>0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td></tr><tr><td>25V</td><td>5.0%</td><td>10.0% 14.0%</td><td>0805≥1μF, 1210≥10μF 0603≥0.33μF</td></tr><tr><td>16V</td><td>5.0%</td><td>10.0%</td><td>0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF</td></tr><tr><td>10V</td><td>7.5%</td><td>15.0%</td><td>0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF</td></tr><tr><td>6.3V</td><td>15.0%</td><td>30.0%</td><td>0805≥10μF; 1210≥100μF</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF	25V	5.0%	10.0% 14.0%	0805≥1μF, 1210≥10μF 0603≥0.33μF	16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF	10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF	6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF					
			Rated vol.	D.F.≤	Exception of D.F.≤																											
			≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																										
			25V	5.0%	10.0% 14.0%	0805≥1μF, 1210≥10μF 0603≥0.33μF																										
			16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF																										
			10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF, TT series & Cap≥1μF																										
			6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF																										
Y5V:																																
<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>---</td><td>---</td></tr><tr><td>35V</td><td>10.0%</td><td>---</td><td>---</td></tr><tr><td>25V</td><td>7.5%</td><td>10.0% 12.5%</td><td>0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF</td></tr><tr><td>16V (C<1.0μF)</td><td>10.0%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>---</td><td>---</td></tr><tr><td>10V</td><td>15.0%</td><td>---</td><td>---</td></tr><tr><td>6.3V</td><td>30.0%</td><td>---</td><td>---</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	7.5%	---	---	35V	10.0%	---	---	25V	7.5%	10.0% 12.5%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF	16V (C<1.0μF)	10.0%	12.5%	0402≥0.068μF; 0603≥0.68μF	16V (C≥1.0μF)	12.5%	---	---	10V	15.0%	---	---	6.3V	30.0%	---	---
Rated vol.	D.F.≤	Exception of D.F.≤																														
≥50V	7.5%	---	---																													
35V	10.0%	---	---																													
25V	7.5%	10.0% 12.5%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF																													
16V (C<1.0μF)	10.0%	12.5%	0402≥0.068μF; 0603≥0.68μF																													
16V (C≥1.0μF)	12.5%	---	---																													
10V	15.0%	---	---																													
6.3V	30.0%	---	---																													
* I.R.: ≥10V, 500MΩ or 25Ω-F whichever is smaller. 6.3V, 5Ω-F																																
15.	High Temperature Load (Endurance)	* Test temp.: NPO, X7R: 125±3°C X5R, Y5V: 85±3°C * To apply voltage: (1) 6.3V or C≥10μF (for X7R, X5R): 150% of rated voltage. (2) 6.3V<V<500V and C<10μF (for X7R, X5R): 200% of rated voltage. (3) 500V: 150% of rated voltage. (4) V≥630V: 120% of rated voltage. (Max. 3600V) * Test time: 1000+24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).	* No remarkable damage.																													
			* Cap change: NPO: within ±3.0% or ±0.3pF whichever is larger. X7R, X5R: ≥10V, within ±12.5% 6.3V, with ±25% Y5V: ≥10V, within ±30% 6.3V, within +30 to -40%																													
			* Q/D.F. value: NPO: Cap≥30pF, Q≥350 10pF≤Cap<30pF, Q≥275+2.5C Cap<10pF, Q≥200+10C X7R, X5R:																													
			<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>3.0%</td><td>6.0%</td><td>0603≥0.047μF; 0805≥0.18μF, 1206≥0.47μF</td></tr><tr><td>25V</td><td>5.0%</td><td>10.0% 14.0%</td><td>0805≥1μF, 1210≥10μF 0603≥0.33μF</td></tr><tr><td>16V</td><td>5.0%</td><td>10.0%</td><td>0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF</td></tr><tr><td>10V</td><td>7.5%</td><td>15.0%</td><td>0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF TT series & Cap≥1μF</td></tr><tr><td>6.3V</td><td>15.0%</td><td>30.0%</td><td>0805≥10μF; 1210≥100μF</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF, 1206≥0.47μF	25V	5.0%	10.0% 14.0%	0805≥1μF, 1210≥10μF 0603≥0.33μF	16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF	10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF TT series & Cap≥1μF	6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF					
			Rated vol.	D.F.≤	Exception of D.F.≤																											
			≥50V	3.0%	6.0%	0603≥0.047μF; 0805≥0.18μF, 1206≥0.47μF																										
			25V	5.0%	10.0% 14.0%	0805≥1μF, 1210≥10μF 0603≥0.33μF																										
			16V	5.0%	10.0%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF																										
			10V	7.5%	15.0%	0402≥0.056μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF TT series & Cap≥1μF																										
			6.3V	15.0%	30.0%	0805≥10μF; 1210≥100μF																										
Y5V:																																
<table><tr><th>Rated vol.</th><th>D.F.≤</th><th colspan="2">Exception of D.F.≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>---</td><td>---</td></tr><tr><td>35V</td><td>10.0%</td><td>---</td><td>---</td></tr><tr><td>25V</td><td>7.5%</td><td>10.0% 12.5%</td><td>0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF</td></tr><tr><td>16V (C<1.0μF)</td><td>10.0%</td><td>12.5%</td><td>0402≥0.068μF; 0603≥0.68μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>---</td><td>---</td></tr><tr><td>10V</td><td>15.0%</td><td>---</td><td>---</td></tr><tr><td>6.3V</td><td>30.0%</td><td>---</td><td>---</td></tr></table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	7.5%	---	---	35V	10.0%	---	---	25V	7.5%	10.0% 12.5%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF	16V (C<1.0μF)	10.0%	12.5%	0402≥0.068μF; 0603≥0.68μF	16V (C≥1.0μF)	12.5%	---	---	10V	15.0%	---	---	6.3V	30.0%	---	---
Rated vol.	D.F.≤	Exception of D.F.≤																														
≥50V	7.5%	---	---																													
35V	10.0%	---	---																													
25V	7.5%	10.0% 12.5%	0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF 0402≥0.068μF																													
16V (C<1.0μF)	10.0%	12.5%	0402≥0.068μF; 0603≥0.68μF																													
16V (C≥1.0μF)	12.5%	---	---																													
10V	15.0%	---	---																													
6.3V	30.0%	---	---																													
* I.R.: ≥10V, 1GΩ or 50Ω-F whichever is smaller. 6.3V, 10Ω-F																																

☐ Constructions

No.	Name	NP0/X7R	X7R/X5R/Y5V
①	Ceramic material	BaTiO ₃ based	
②	Inner electrode	AgPd alloy	Ni
③	Termination	Inner layer	Ag
④		Middle layer	Ni
⑤		Outer layer	Sn

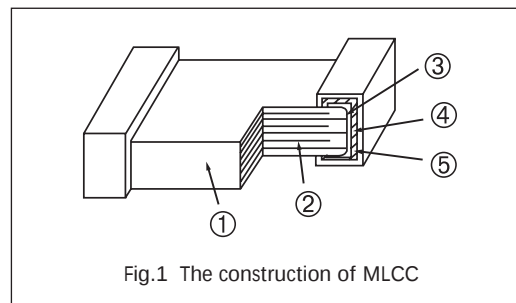

☐ Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- Don't store products in a corrosive environment such as sulfide, chloride gas, or acid. It may cause oxidization of electrode, which easily be resulted in poor soldering.
- To store products on the shelf and avoid exposure to moisture.
- Don't expose products to excessive shock, vibration, direct sunlight and so on.

☐ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

