
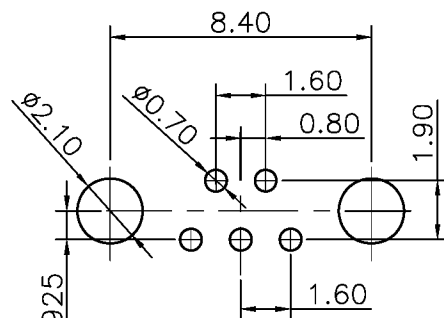
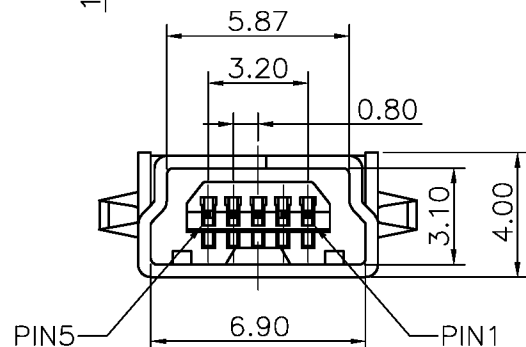
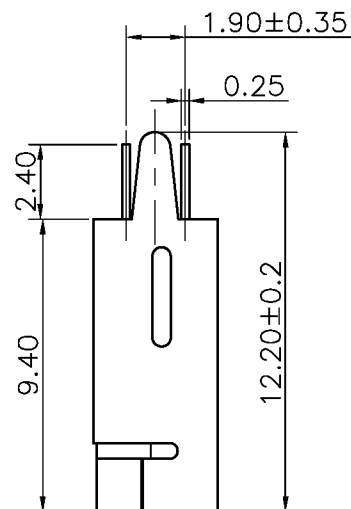


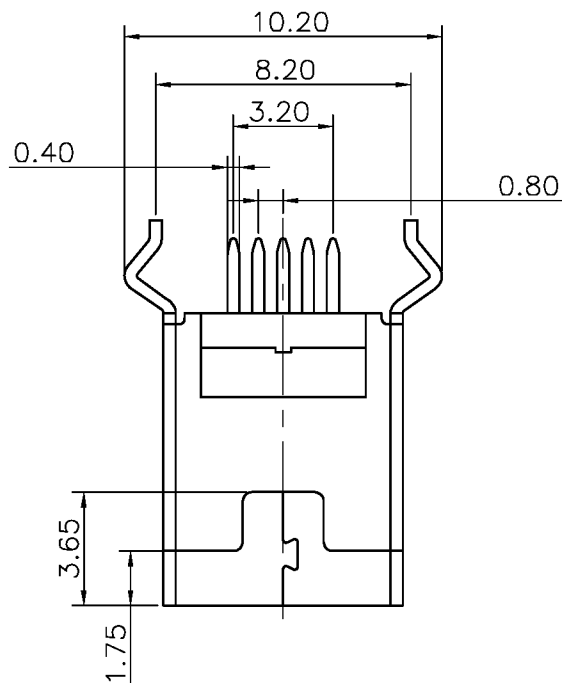

RECOMMENDED PCB LAYOUT
TOL.:±0.05

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUN. 11'12
B		REDRAW	JAN. 08' 19

1.MATERIAL:

INSULATOR: Hi-TEMPERATURE PLASTIC,UL 94V-0,
COLOR:BLACK
TERMINAL: COPPER ALLOY
SHELL: COPPER ALLOY

2.PLATING:

TERMINAL: GOLD FLASH PLATING ON CONTACT AREA,
AND TIN ON SOLDER AREA
SHELL: 40u" NICKEL UNDERPLATED ON ALLOVER

3.SPECIFICATIONS

INSULATION RESISTANCE: 100MΩ min.AT DC 500V DC
WITHSTANDING VOLTAGE: 100V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 50mΩ max. AT 10mA/20mV max
OPERATING TEMP.RANGE: -40°C - +85°C

TOLERANCE UNLESS OTHERWISE SPECIFIED		
LINEAR	ANGLE	
X. ±	X° ±	
.X ± 0.35	.X° ±	
.XX ± 0.25	.XX° ±	
.XXX±	.XXX° ±	
APPD		
CHKD		
DRAW	Z	JAN. 08' 2019



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
Mini USB 5P B Type
Female Straight Dip

CPART NO.

PART NO.
MUDSB05FTKNN

CAD NO.
F:\PDF\USB\USB-0076

SHEET
1 OF 1

圖面編號:GTKSD2964-B(1)