





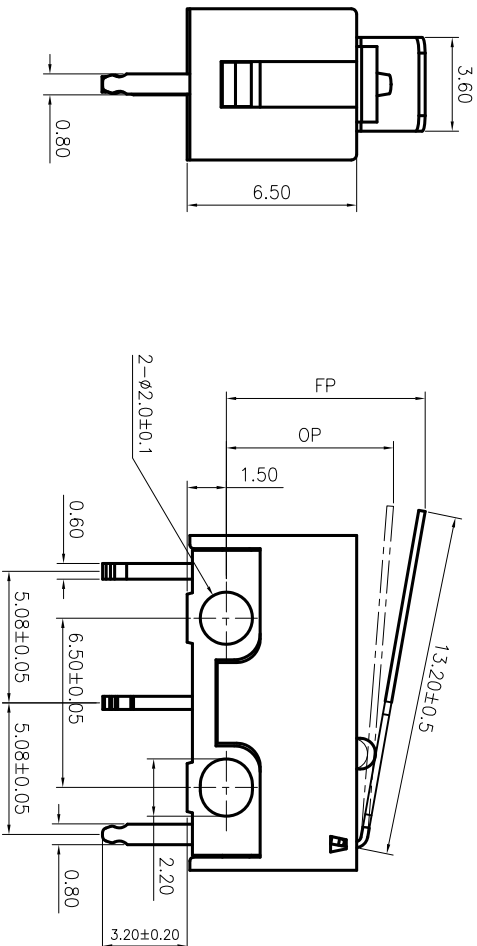

CAD FILE:

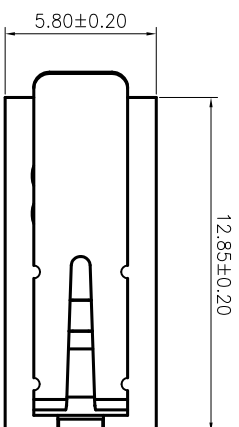

P. C. B MOUNTING HOLE DIMENSIONS



| | |
|----------------------------------|-----------------------|
| Operating Force | 30 ± 15gf |
| Release Force | 5 gf min |
| Operating Position | 7.00 ± 0.80mm |
| Free Position | 8.30 ± 0.80mm |
| Contact Resistance | 100mΩ Max. |
| Insulation Resistance | 100MΩ Min. 500VDC |
| Dielectric Voltage | AC 500V 60 sec. |
| Operating Life | 100,000 cycles |
| Electronics Life | 10,000 cycles |
| Rating | 1 (0.5) A 125/250V AC |
| Operating Temperature Rangeonics | -25 to 85°C |

| | | | | |
|-----|----------------|--------------------|------|--------|
| 9 | STEEL KNOB | SUS | 1 | / |
| 8 | TERMINAL (NG) | SILVER PLATE BRASS | 1 | / |
| 7 | TERMINAL (NO) | SILVER PLATE BRASS | 1 | / |
| 6 | TERMINAL (COM) | SILVER PLATE BRASS | 1 | / |
| 5 | BASE | PBT | 1 | / |
| 4 | CONTACT | Ag ALLOY | 1 | / |
| 3 | KNOB | PBT | 1 | / |
| 2 | MOVABLE PLATE | COPPER BERYLLIUM | 1 | / |
| 1 | COVER | PBT | 1 | / |
| NO. | PARTS | MATERIALS | Q'TY | FINISH |

| | |
|----------------------------|-------|
| TOLERANCE UNLESS SPECIFIED | |
| WITHIN 1.5mm : ±0.1mm | A |
| OVER 1.5mm : ±0.2mm | DATE |
| TITLE : MICRO SWITCH | |
| UNIT : mm | |
| DRWG NO.: MX-1382-F91 | |
| DESCRIPTIONS OF REVISION | |
| APPD. | APPD. |

MODEL: MX-1382-F91

SCALE: 1:1

WEALTH METAL FACTORY LTD.

| | | |
|-------|-----|-------------|
| DWN. | 陈远锋 | 2016-Dec-13 |
| CHK'D | 黄炳仲 | 2016-Dec-13 |
| APPD. | 刘勇刚 | 2016-Dec-13 |