


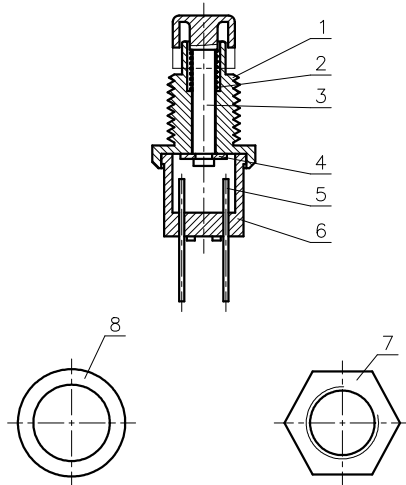


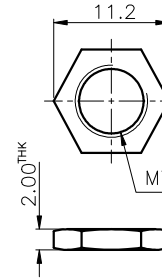
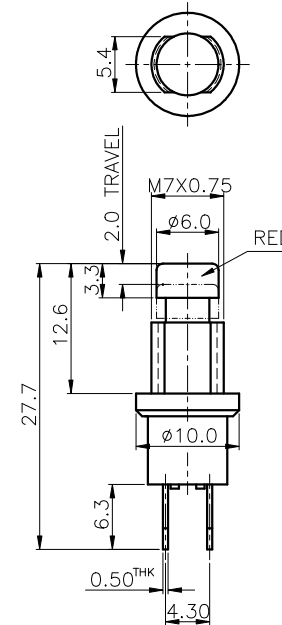



REVISION

NO.	PARTICULAR	BY.	DATE
-----	------------	-----	------



SCHEMATIC

SPRING WASHER
(1PCS)M7 NUT
(1PCS)

General Tolerance(m m)		
Decimal	.X	± 0.2
	.XX	± 0.1
	.XXX	± 0.05
Angle	$\pm 2^\circ$	

RoHS Compliance

8	R-104X074X010	SPRING WASHER	1	1.0 ^{THK} C.R.S	
7	YN-070X112X020-075	M7 NUT	1	2.0 ^{THK} C.R.S	
6	TB-PB11D01-01	TERMINAL BASE	1	POM	
5	T-PB11D01	TERMINAL	2	0.5 ^{THK} BRASS PLATE	
4	C-CP16	CONTACT PLATE	1	0.5 ^{THK} BRASS PLATE	
3	K-PB11D01	KNOB	1	POM	
2	0-33X295X430(5)H	SPRING	1	SWC WIRE	
1	S-PB11D02-01	SHELL	1	Zn ALLOY	
NO.	PARTS NO.	PARTS NAME	QTY.	MATERIAL	REMARK

ISSUED	SPECIFICATION (INITIAL)	TITLE: PUSH BUTTON SWITCH(^{PUSH} ON)				
	RATING: DC 50V 0.5A	MODEL NO: PB-11D02-T(H1)R-00-#350				
	CONTACT RESISTANCE: MAX. 30mΩ					
	INSULATION RESISTANCE: 500MΩ AT 500V DC	UNIT: m m	DWN	LIU	29.10.26	
	WITHSTAND VOLTAGE: AC 500V FOR 1 MIN		CHK'D			
	OPERATION FORCE: 200±150g	SCALE: 2 : 1	APPD.			
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)					
BY:	PROMOTIVE INDUSTRIAL CO., LTD. HONG KONG				DRWG NO: 960574-02	REV. A
DATE:						