


	 DEGSON ELECTRONICS CO., LTD.
 THIROANGLE PROJECTION	NAME PC 2.5

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	HW	05/07/06'
△		增加UL刻字	CSX	03/26/07'
△		品名、料号增加环保标示“(H)”	LJH	12/10/07'
△		增加VDE刻字及参数	Zengy	08/07/08'

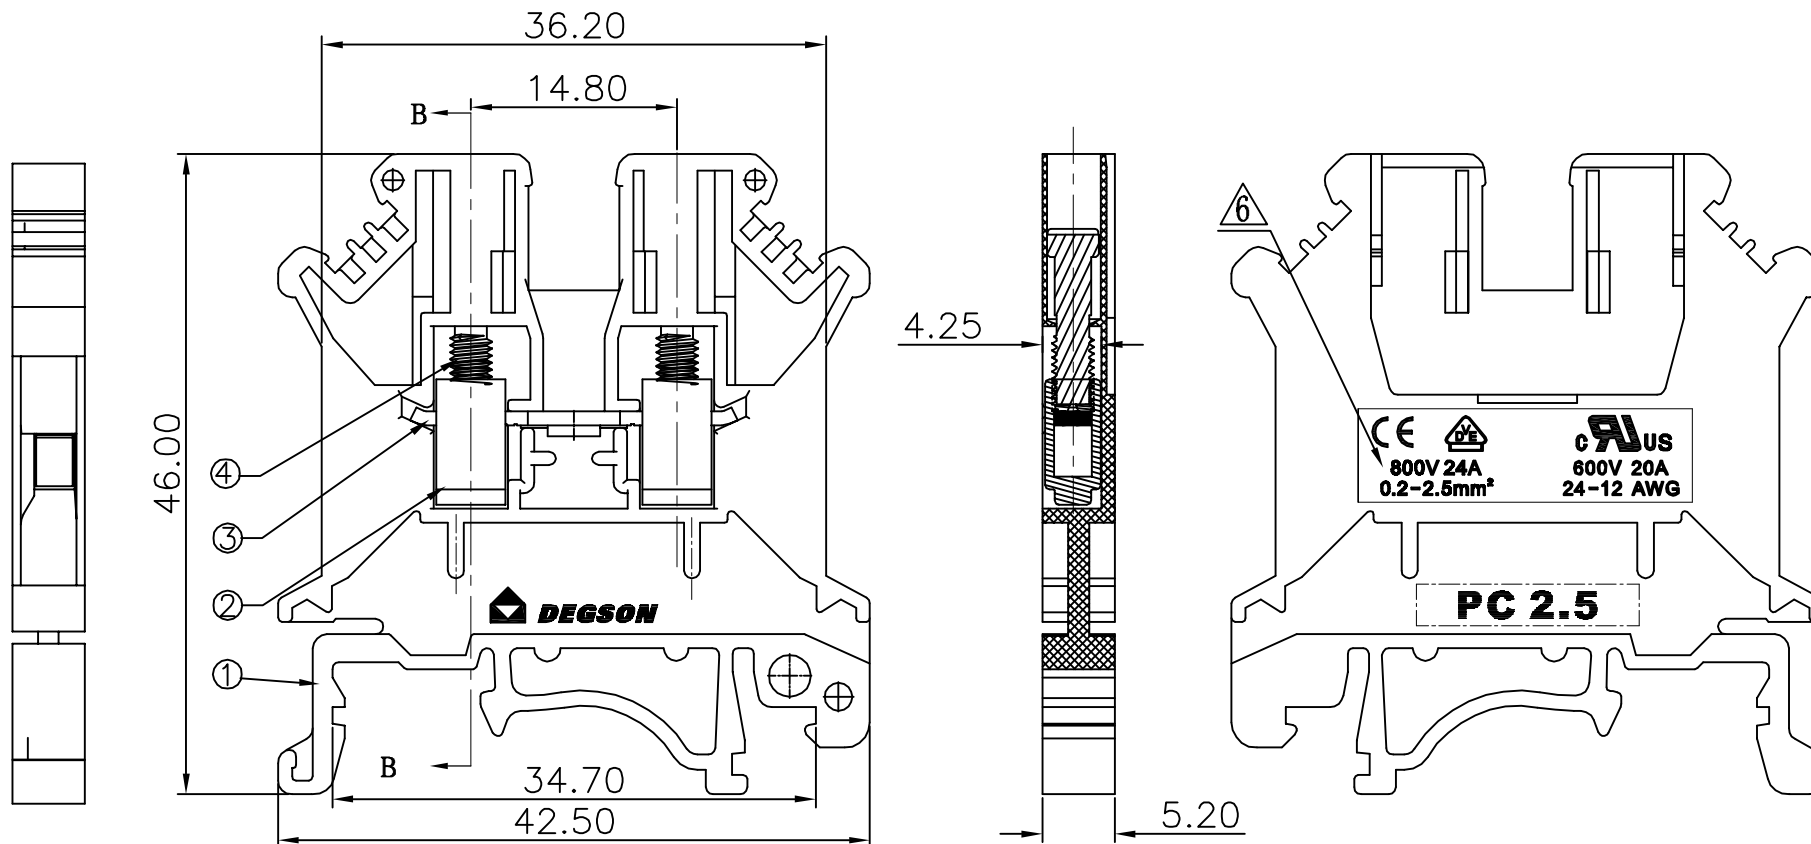

Notes:

1. Rated voltage/current:UL 600V/20A
VDE 800V/24A
2. Operation temperatures:-40℃~+105℃
3. Withstanding Voltage:AC3000V/1Min
4. Insulation Resistance:5000MΩ/DC1000V
5. Wire Range:24~12AWG, 0.2~2.5mm²
6. Max. Torque Value:M3, 5.1kgf.cm
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	PC 4 -Screw	S000001060(H)	2	Brass	Ni Plated
3	PC 2.5 -Contact	6004B00010(H)	1	Copper	SnCe Plated
2	PC 2.5 -Brass Cage	X000000880(H)	2	Brass	Ni Plated

SECTION B-B

1	PC 2.5-Housing	6004A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 07/16/'05	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME PC2.5-01P-1Y-00A(H) DRAWING NO. PC2.5-E01 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	ANGLES ± 1°	G.E :		
	THIRD ANGLE PROJECTION	FINISH :	SCALE :		