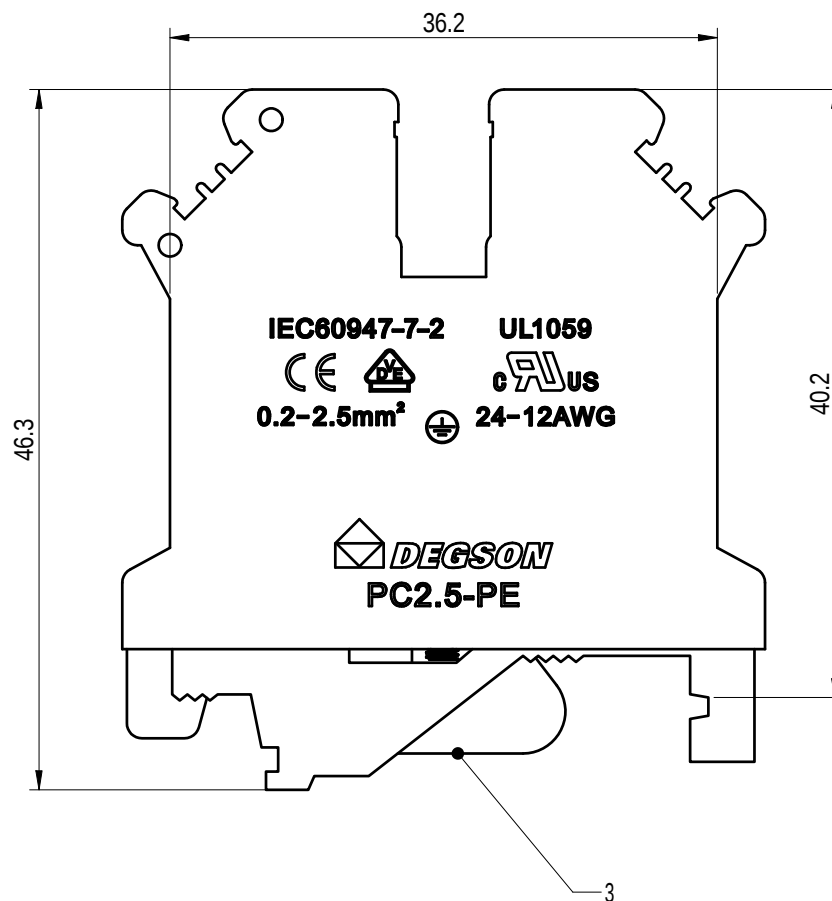


UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过电压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~12/ 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.2/01P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~-+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

 DEGSON			MATERIAL: / /		SURFACE/COLOR: / /	
APPD: 彭敏 2023. 07. 10			MAT NO./REV: / /		MAT STATUS: 批量	
CHKD: 高卫国 2023. 07. 10			NAME PC2. 5-PE-01P-1Y-00Z (H)			
DRFT: 叶旭迪 2023. 07. 10						
DRAWING NO. /			TYPE CUSTOMER DRAWING		DRAWING STATUS work	
SCALE 2:1			SHEET 1/1			

00	/	/	叶旭迪	2023.07.10
REV	ECN	DESCRIPTION	DRFT	DATE