

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 30A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 24~10AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	32A

2.Torque value : M3 , 0.5N·m





3.Wire range : 0.2~4mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.2mm, Poles : N=01P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						0.1/10
To	Over	To	Over	To	Over	To	Over	
6	10	10	24	30	60	100	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

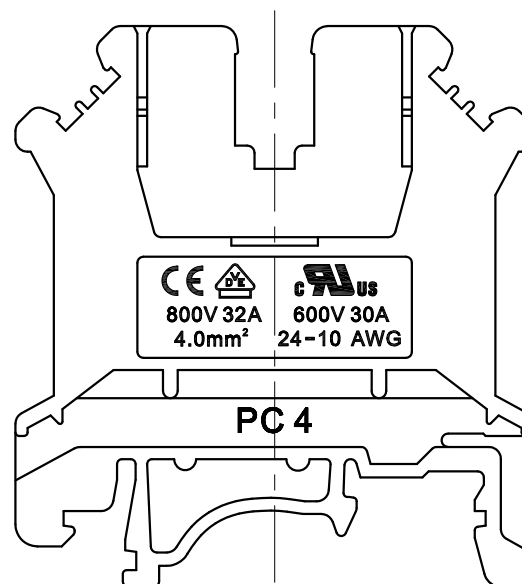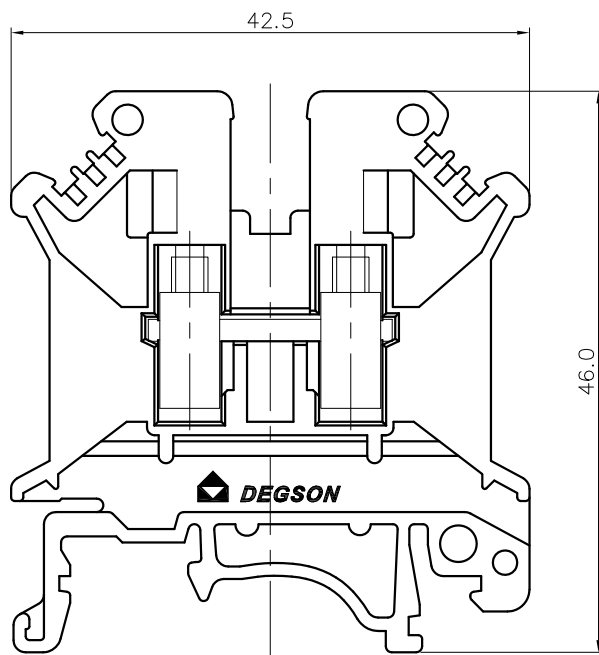

PC4 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)
(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/			NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/			NAME:		
	CHKD:	/			PC4-01P-1Y-00A(H)		
	DRFT:	/			TITLE: CUSTOMER DRAWING	REV	D0
		DRAWING NO.:				SHEET	1/1
		MM (INCH)				SCALE	1:1
		DO NOT SCALE DRAWING					