

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Torque value : M4 , 10.53Lb.in

2.Wire range : 24~10AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

2.Torque value : M4 , 1.2N·m

3.Wire range : 0.2~6mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 8.20mm, Poles : N=01P

3.Stripping length : 9~10mm

4.Operating temperature: -40°C~+105°C




5.Undimensioned tolerances:


Pitch range in mm			Nominal dimension range in mm				0.1/10	
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

PC6-PE - 01P - 1Y - 00A (H)

(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

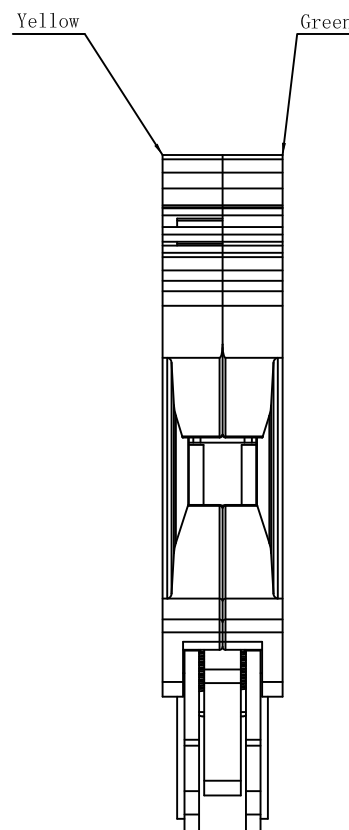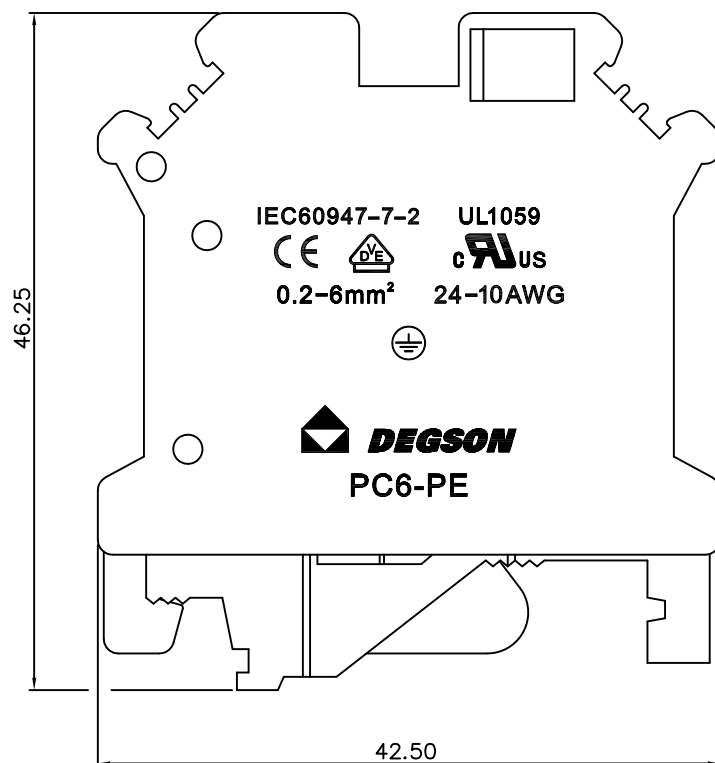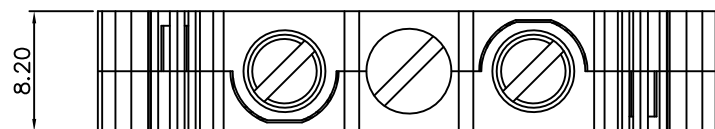

DETACHED LISTS	PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/	NAME: PC6-PE-01P-1Y-00A(H)			
	CHKD:	/				
	DRFT:	/	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1	
			 MM (INCH)	DO NOT SCALE DRAWING		SCALE 1:1