

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Torque value : M3 , 4.43Lb.in

2.Wire range : 24~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV

2.Torque value : M3 , 0.5N·m

3.Wire range : 0.2~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 5.20mm, Poles : N=01P


3.Stripping length : 7~8mm


4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm				Nominal dimension range in mm				0.1/10
TO	Over	Over	TO	TO	Over	Over	Over	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

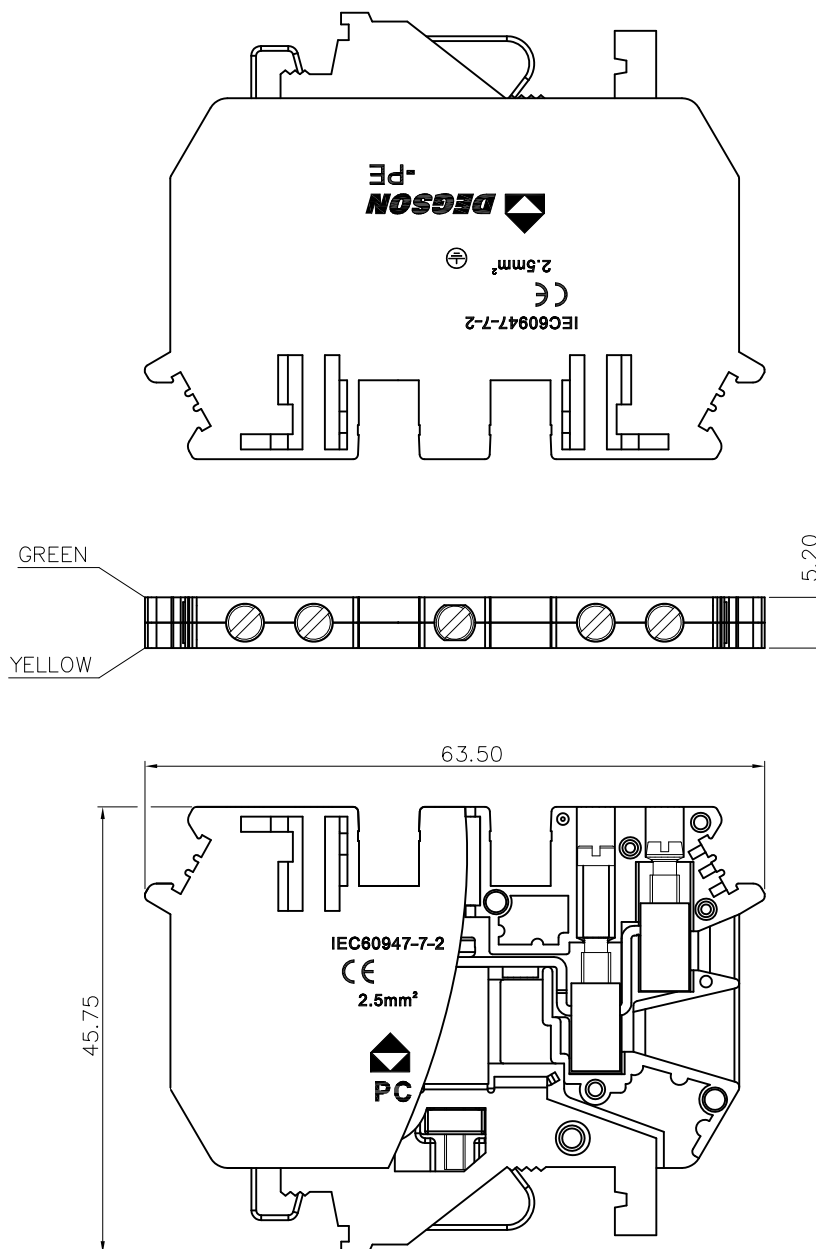

DETACHED LISTS	PART NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: /	NAME: PCDK2.5-PE-01P-1Y-00A(H)		
	CHKD: /	TITLE: CUSTOMER DRAWING		
	DRFT: /	REV DO		
 THIRD ANGLE PROJECTION	DRAWING NO.: /		SHEET	1/1
	MM (INCH)		SCALE	1:1