
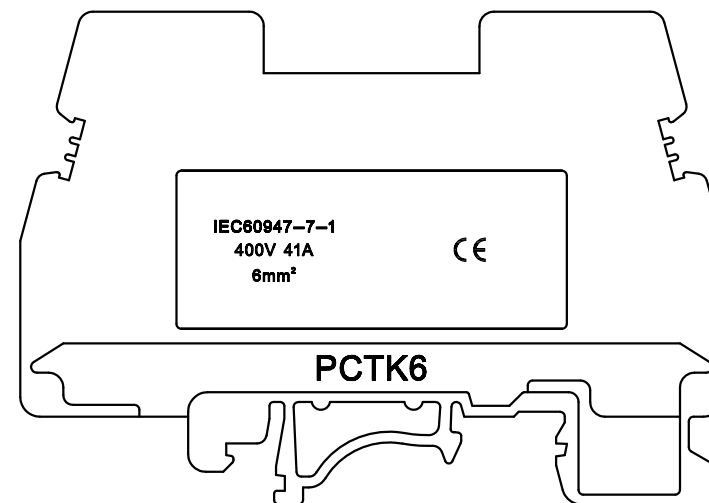
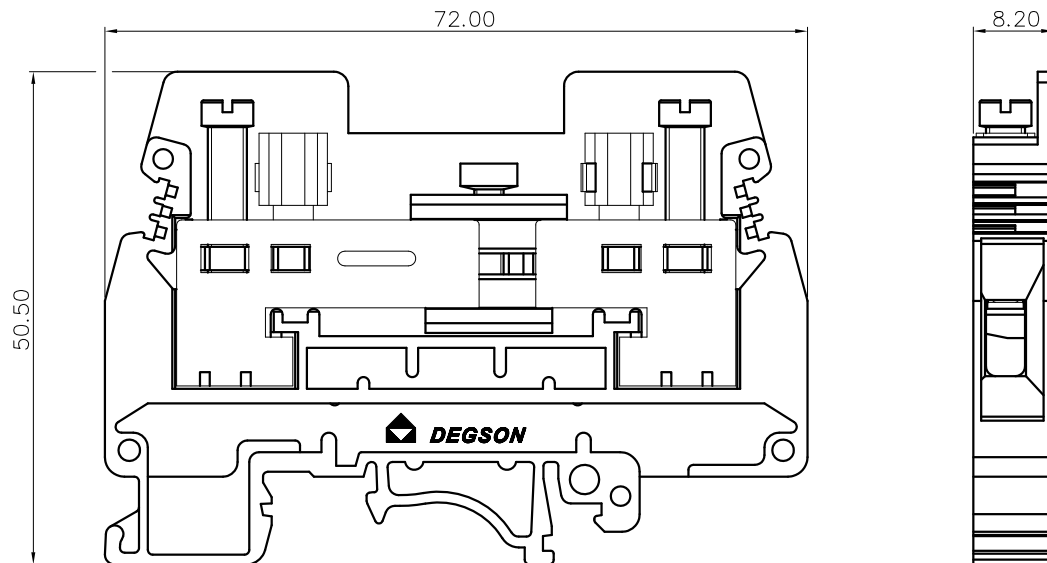


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE



PCTK6

PCTK6 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 40A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M4 , 10.53Lb.in
- 4.Wire range : 26~10AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	400 V
Rate current(A)	41 A

- 2.Torque value : M4 , 1.2N·m
- 3.Wire range : 0.5~6mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.20mm, Poles : N=01P
- 3.Stripping length : 12~13mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: PCTK6-01P-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
		THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING		SHEET	1/1
						SCALE		1:1	