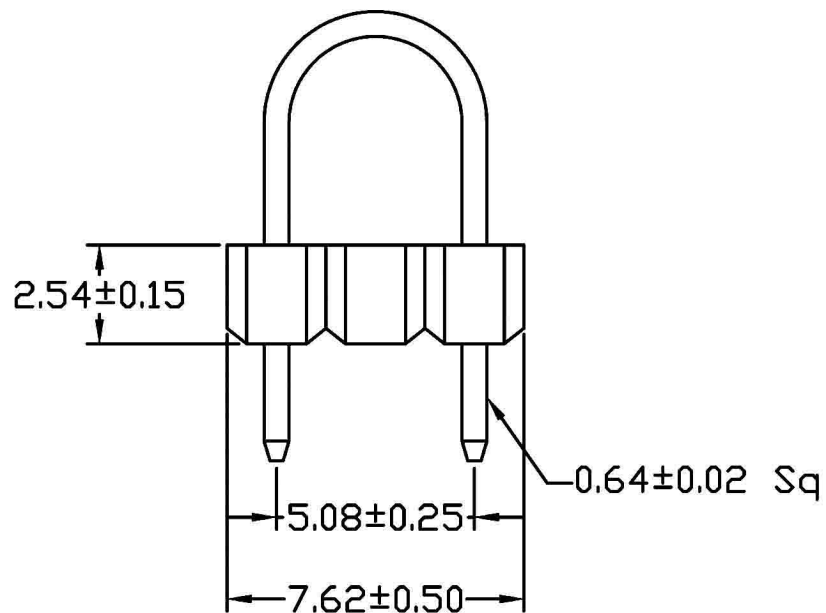
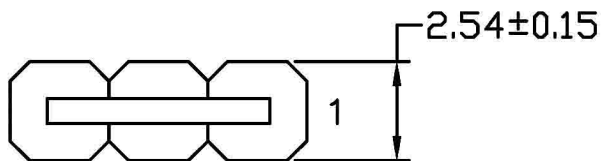


RECOMMENDED P. C. B. LAYOUT

RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL. 25'08
B		MODIFY P/N	DEC.12'11

SPECIFICATIONS

Current Rating:

3 Amp

Insulator resistance:

5000 Megohms Min.

Contact Resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40° ~ +105°C

Contact Material:

Brass

Insulator Material:


High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold or Tin plated

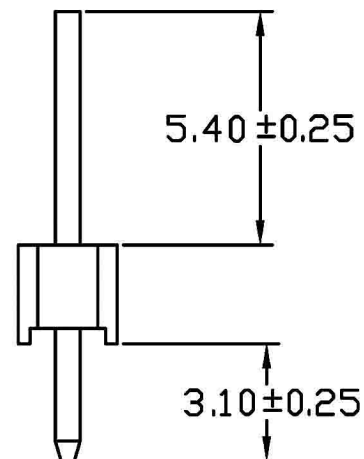

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX ±	.XXX° ±

APPD	
CHKD	
DRAW	Z

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
Pin Header

CPART NO.

PART NO.
PHSS03G(T)10-U-LF-01

CAD NO. I642
F:\PDF\PH\PH-0413

SHEET
1 OF 1

圖面編號:GTKSD2534-B(1)