



Dimensional Information:

Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60




RoHS COMPLIANT

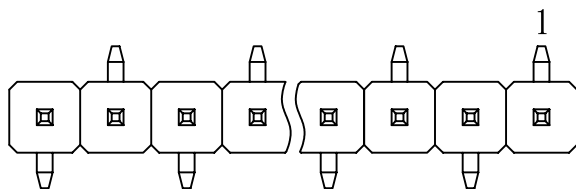


R TYPE

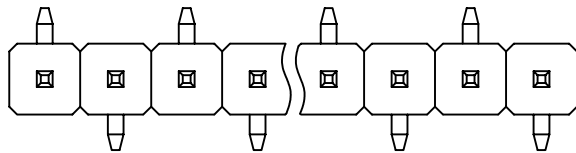


L TYPE

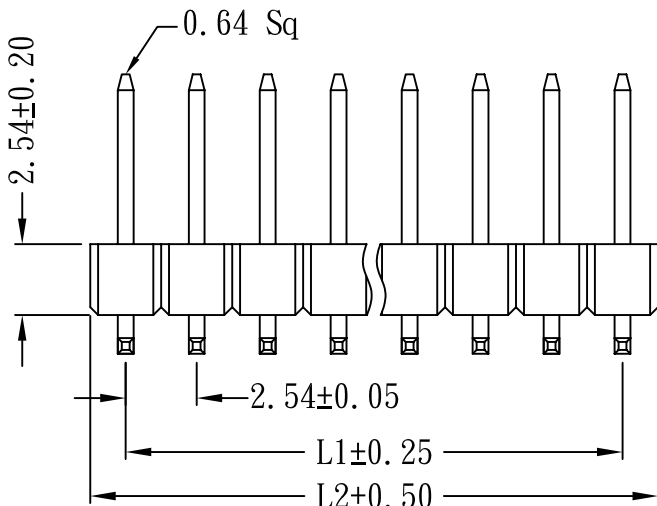

Recommended P.C. Board

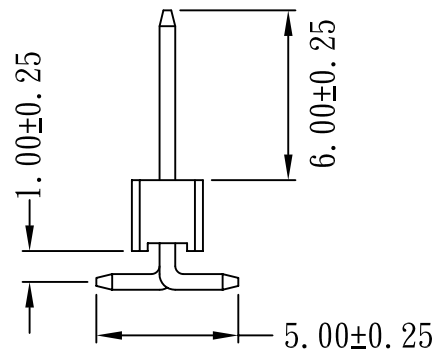

SPECIFICATIONS
 Current Rating:
 3 Amps
 Voltage Rating:
 230V
 Insulator resistance:
 5000 Megohms Min.
 Contact Resistance:
 20m ohms Max.
 Dielectric withstanding:
 AC 500V/minute.
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 Brass
 Insulator Material:
 Nylon-6T Polyester UL94V-0
 Color:Black.
 Finish:
 Gold Plated.
 Packing:
 Bag or Tube

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.		
LINEAR		ANGLE					
X. ±		X° ±	UNITS	TITLE 2.54MM PIN HEADER SINGLE ROW SMT TYPE	PART NO. PHSS**G5*-LF(-TUBE)		
.X ± 0.38		.X° ±	MM		CAD NO. I642		SHEET
.XX ± 0.25		.XX° ±			F:\Drw\PH\PH-0070		1 OF 1
.XXX±		.XXX° ±	SCALE	CPART NO.	圖面編號:GTKSD0683-G(1)		
APPD			SIZE A4				
CHKD							
DRAW	Z.	JUL. 30' 2013					

圖面編號:GTKSD0683-G(1)