



Dimensional

Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

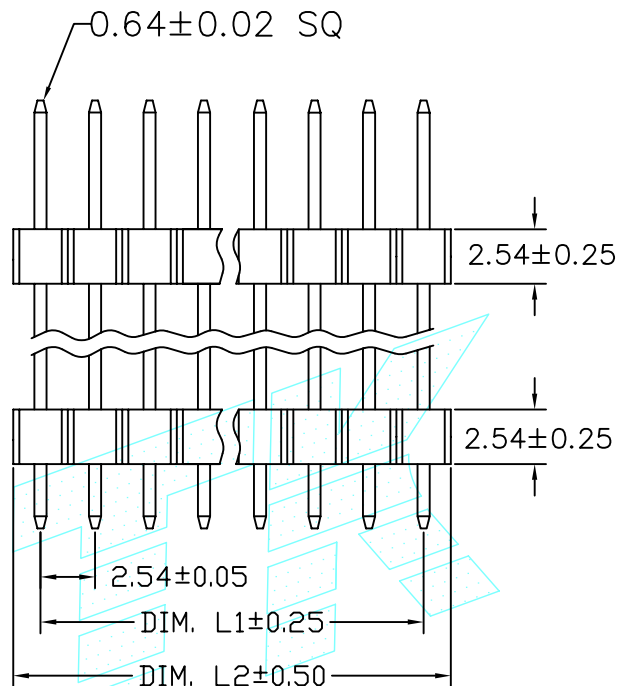

Recommended
P.C.Board
Hole Layout



RoHS COMPLIANT

REV.	ECN NO.	DESCRIPTION	DATE
A		RELEASE	SEP. 26' 08
B		MODIFY P/N	APR. 11' 11

SPECIFICATIONS

Current Rating:
3 Amps

Insulator resistance:
5000 Megohms Min.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40°C ~ +105°C

Contact Material:
Brass

Insulator Material:
Polyester UL94V-0

Insulator Color:
Black

Finish:
Gold Flash Plated

P/N CODE	DIM. M
A0	10±0.25
E0	15±0.25
L0	20±0.25

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINEAR	ANGLE
X. ±	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX ±	.XXX° ±
APPD	
CHKD	
DRAW	Z.



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
2.54mm Pin Header

CPART NO.

PART NO.
PHSS**G10-6030**

CAD NO. I642
F:\Drw\PH\PH-0419

SHEET
1 OF 1

圖面編號:GTKGS1815-B(1)