


Dimensional

Cir- cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

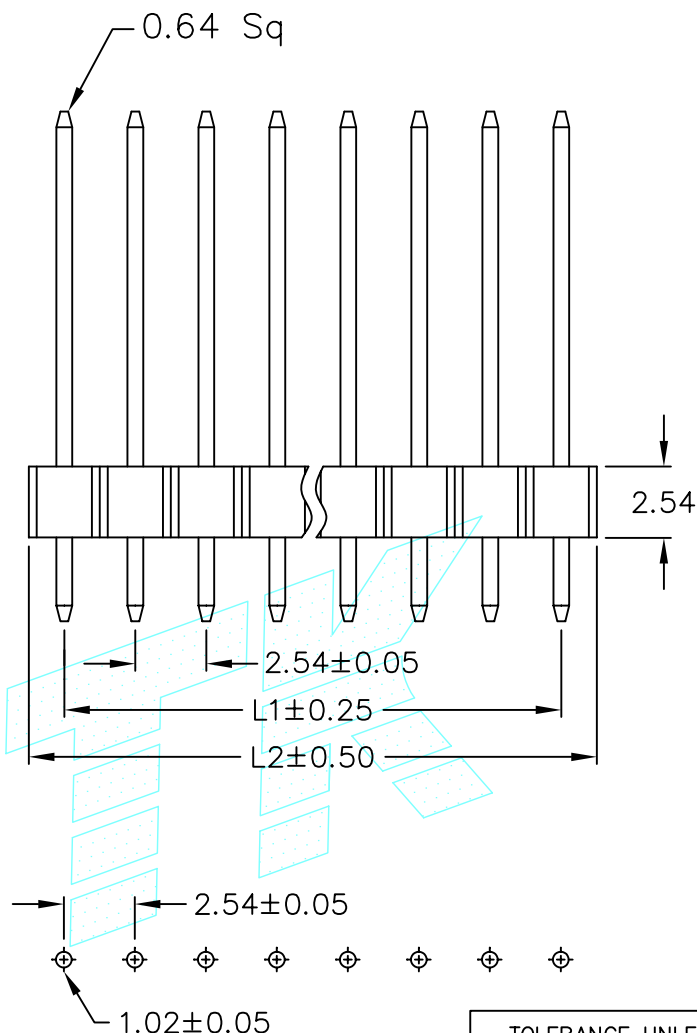

Recommended P.C.Board
Hole Layout

RoHS COMPLIANT

SPECIFICATIONS

Current Rating:

3 Amps

Insulator resistance:

5000 Megohms Min.

Dielectric withstanding:

AC 500 V

Voltage:

AC 250 V

Operating Temperature:

-40°C ~ +105°C

Contact Material:

Brass

Insulator Material:

High Temperature Thermoplastic
+Glass Fiber UL94V-0

Color:Black

Finish:

Standard:Gold flash

TOLERANCE UNLESS
OTHERWISE SPECIFIED

LINEAR	ANGLE
X. ±	X° ±
.X ± 0.38	.X° ±
.XX ± 0.25	.XX° ±
.XXX±	.XXX°±

APPD	
CHKD	
DRAW	Z.
	MAR. 14' 2011

PROJECTION



UNITS

MM

SCALE

SIZE

A4



GOLD-TEK ELECTRIC CO., LTD.

TITLE
PITCH: 2.54MM
PIN HEADER
SINGLE ROW

CPART NO

PART NO.

PHSS**G10-A530-LF

CAD NO. I642

F:\Drw\PH\PH-0393

SHEET

1 OF 1

圖面編號: GTKGS1750-B(1)