

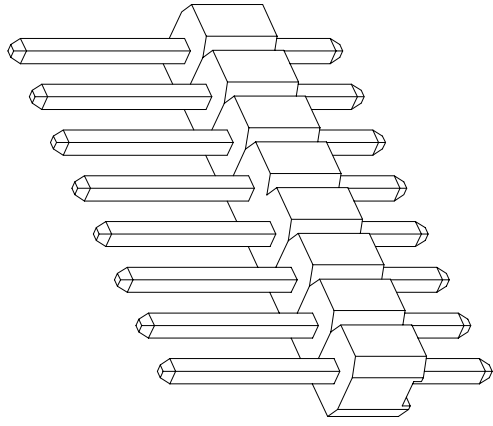


Dimensional & Ordering Information:

Cir-cuits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

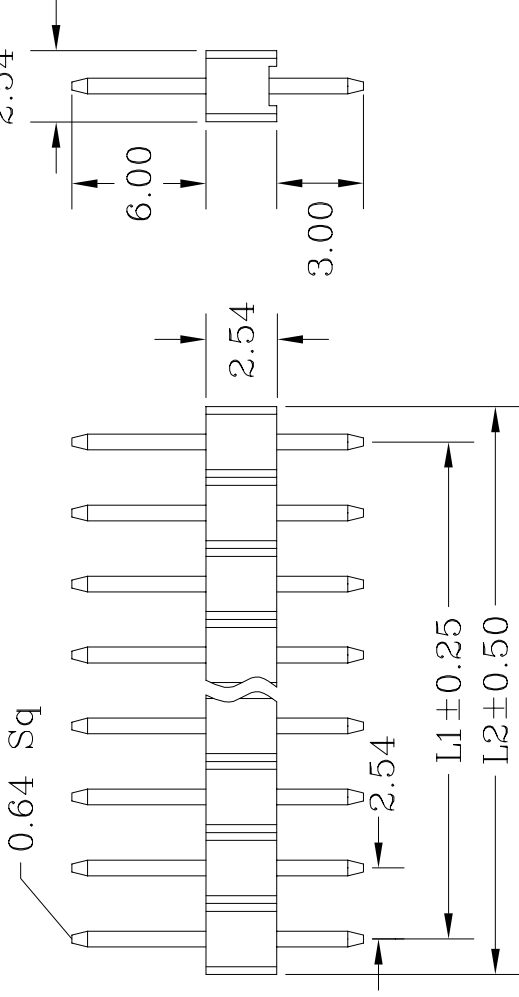

Recommended
P.C.Board
Hole Layout



APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Mate with Mini Jumper and P.C.Board connectors e.g.

SPECIFICATIONS

Current Rating:
3 Amps
Insulator resistance:
5000 Megohms Min.
Dielectric withstanding:
AC 500 V
Voltage:
AC 250 V
Operating Temperature:
-40° - +105°C
Contact Material:
Brass
Insulator Material:
Standard:P.B.T
Finish:
Gold flash



TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	UNITS
X. ±	X° ±	MM
.X ± 0.38	.X° ±	SCALE
.XX ± 0.25	.XX° ±	SIZE
.XXX ±	.XXX° ±	A4
APPD		
CHKD		
DRAW	Tao.Tao.	JUL.05.2002

TITLE
PIN HEADER
PITCH:2.54MM
CPART NO

GOLD-TEK ELECTRIC CO., LTD.

PART NO. PHSS**G10
CAD NO. I642
F:\Drw\PH\PH0060

SHEET 1 OF 1
圖面編號:GTKSD0652-A(1)

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	JUL.05.02