


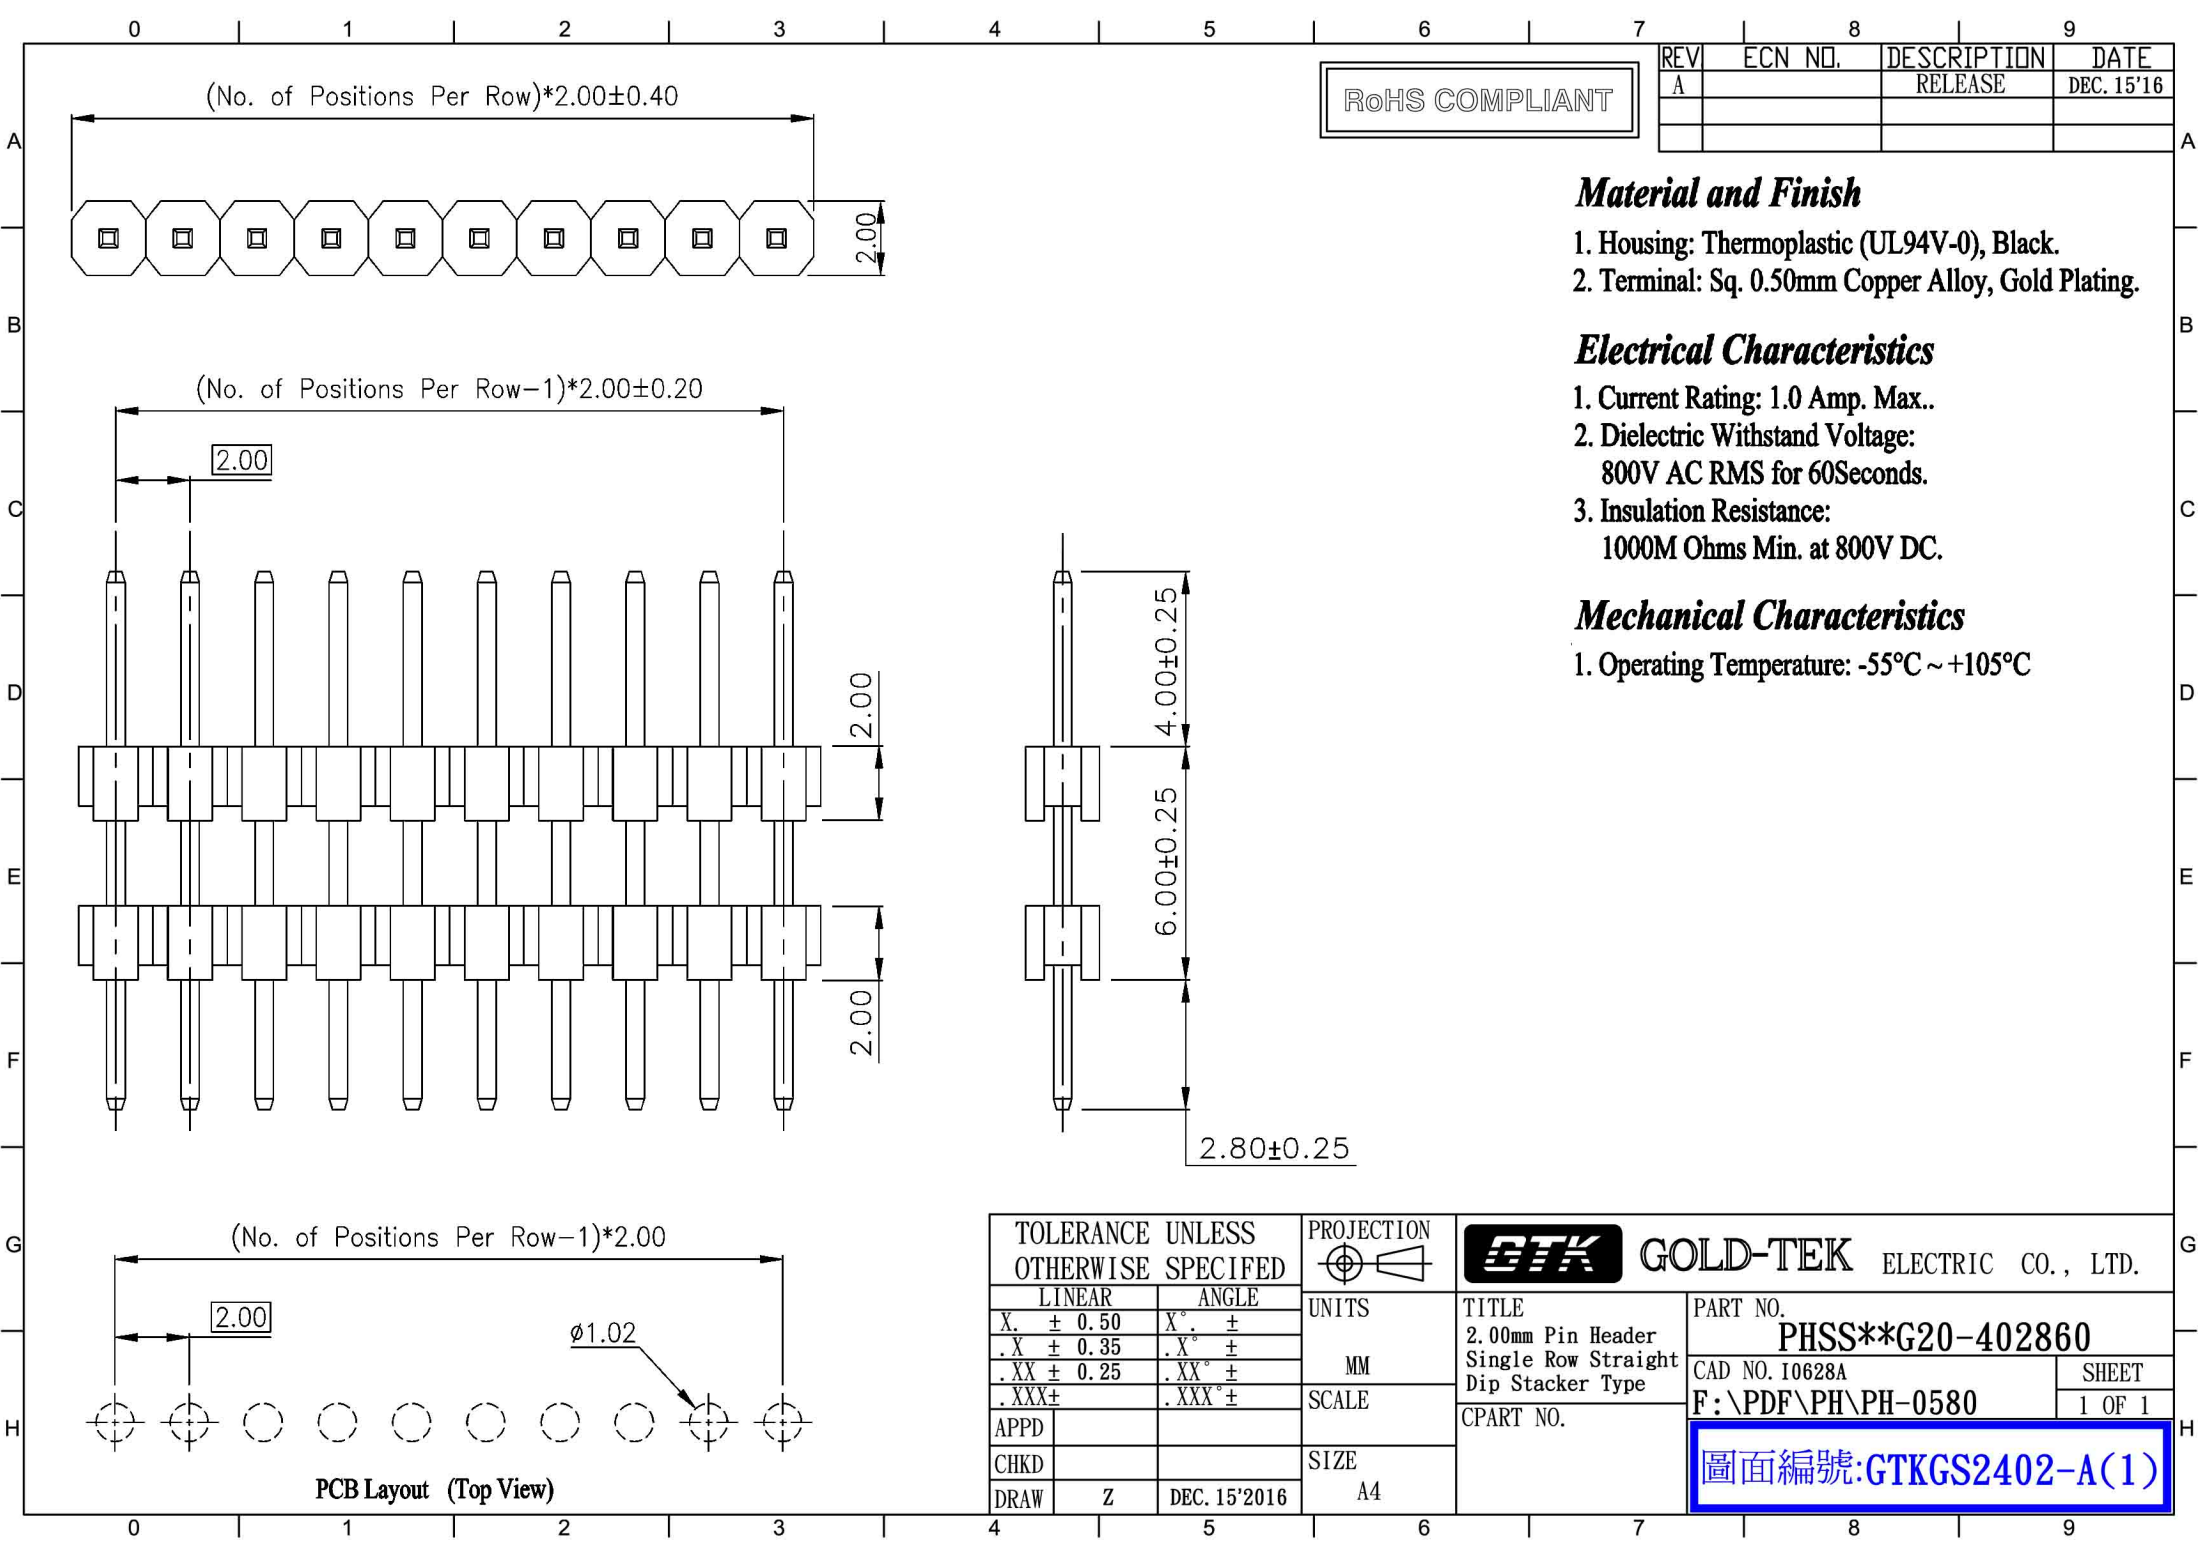

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	DEC. 15'16

RoHS COMPLIANT

Material and Finish

- 1. Housing: Thermoplastic (UL94V-0), Black.
- 2. Terminal: Sq. 0.50mm Copper Alloy, Gold Plating.

Electrical Characteristics

- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 800V DC.

Mechanical Characteristics

- 1. Operating Temperature: -55°C ~ +105°C

TOLERANCE UNLESS OTHERWISE SPECIFIED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X. ± 0.50	X° ±		MM		2.00mm Pin Header	
.X ± 0.35	.X° ±		SCALE		Single Row Straight	
.XX ± 0.25	.XX° ±		SIZE		Dip Stacker Type	
.XXX±	.XXX° ±		A4		CPART NO.	
APPD					PART NO.	
CHKD					PHSS**G20-402860	
DRAW	Z	DEC. 15'2016			CAD NO. I0628A	
					SHEET 1 OF 1	
					F:\PDF\PH\PH-0580	
					圖面編號:GTKGS2402-A(1)	