

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或, 否则禁止转让、复制、利用、交流本文件的内容。 侵权者将承担法律责任。 未用型号和外专利的所有权利。

FOR-1755 Rev.1.3

2



3

4

5




6

Technical requirements:	
Rated Voltage/Current	72V/120A
Insulate Resistance	≥500MΩ
Withstanding Voltage	Power 3500V AC,Signal 1500AC
Contact Resistance	Power ≤1mΩ,Signal ≤10mΩ
Ingress Protection	IP67(mated)
Insertion/Pullout Times	3,000 Times
Operating temperature(°C)	-40℃→+105℃
Terminal	Soldering
Wire range(mm)	21.2mm

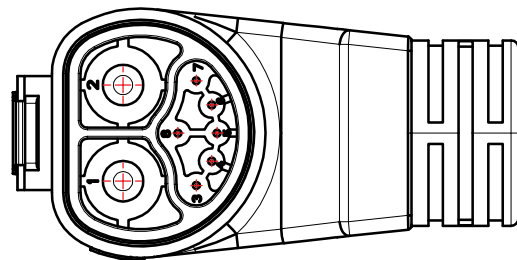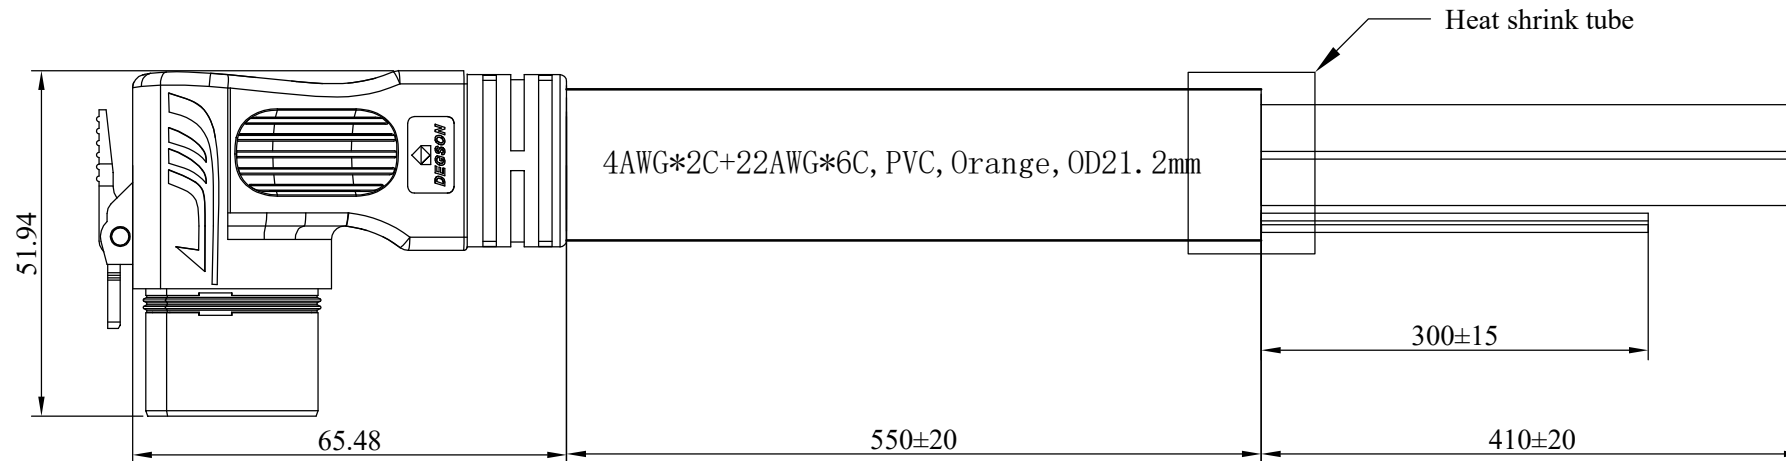

Wiring cable		
NO.	Color	Spec.
1	RED	Power line4AWG
2	BLACK	Power line4AWG
3	Signal pin	CUT
4	Signal pin	CUT
5	GREEN	Signal line22AWG
6	Signal pin	CUT
7	YELLOW	Signal line22AWG
8	Signal pin	CUT

REV/	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL:		SURFACE/COLOR:				
		MAT NO./REV: /		MAT STATUS:				
APPD:		NAME RM-EBBH-2002-M-L960-00A (H)						
CHKD:	Eric							
DRFT:	Andy	DRAWING NO.		TYPE		DRAWING STATUS	SCALE 1:1	SHEET 1/1
 A4 								

1

2

3

4

5

6