
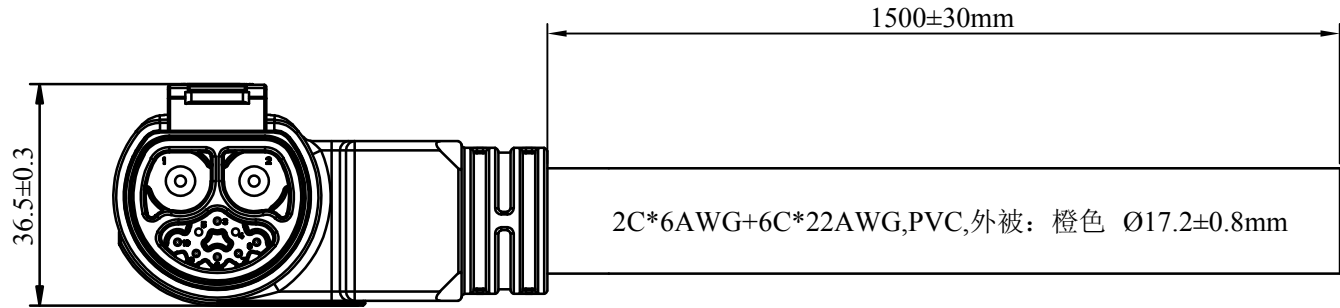


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经授权复制或传播本文件内容，或未经许可使用或传播本文件内容，均属于侵权行为，公司将依法追究法律责任。 未经授权复制或传播本文件内容，均属于侵权行为，公司将依法追究法律责任。

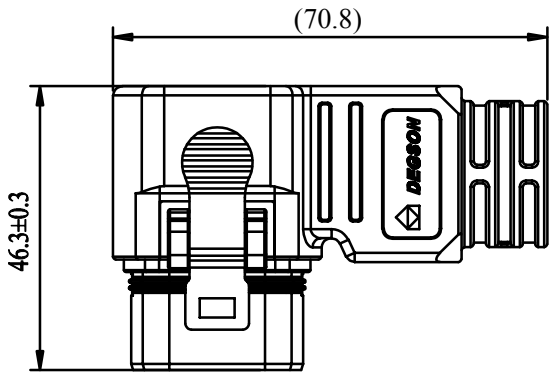

尺寸公差(mm)					线束长度尺寸公差 (mm)					0290
0	>30	>60	>100	>150	0	50	150	300	>1000	
~30	~60	~100	~150		~50	~150	~300	~1000		±1°
±0.2	±0.3	±0.5	±0.7	±1.0	±5	±10	±15	±20	±3%	
技术要求/Technical requirements:										
额定电压/Rated Voltage/Current							72V /80A			
绝缘电阻/Insulate Resistance							≥100MΩ			
耐压/Withstanding Voltage							500V AC			
防护等级/Ingress Protection							IP67			
插拔寿命/Insertion/Pullout Times							3,000 Times			
使用温度范围/Operating temperature(°C)							-40℃~+105℃			
接线方式/Terminal							电源: 压接, 信号: 焊接			
导线外径范围/Wire range(mm)							Φ17.2±0.8mm			

10	蓝色	22AWG
9	绿色	22AWG
8	黄色	22AWG
7	白色	22AWG
6	灰色	22AWG
5	空	空
4	空	空
3	橙色	22AWG
2	黑色	6AWG
1	红色	6AWG
Conn1	Colour	线材规格
Pin out		

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL: 材质		SURFACE: 表面处理	
APPD:		MAT NO./REV:		/ 版本	
CHKD:		NAME		MAT STATUS: 物料状态	
DRFT: 李鹏飞		2023-10-18		RM-EBBH-2006-M-L1500-03A(H)	
DRA		DRAWING NO.		TYPE	
A4		图号		图纸类型	
DRA		DRAWING STATUS		SCALE	
A4		图纸状态		1:1	
A4		SHEET		1/1	

1

2

3

4

5

6