



RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	AUG. 28' 19

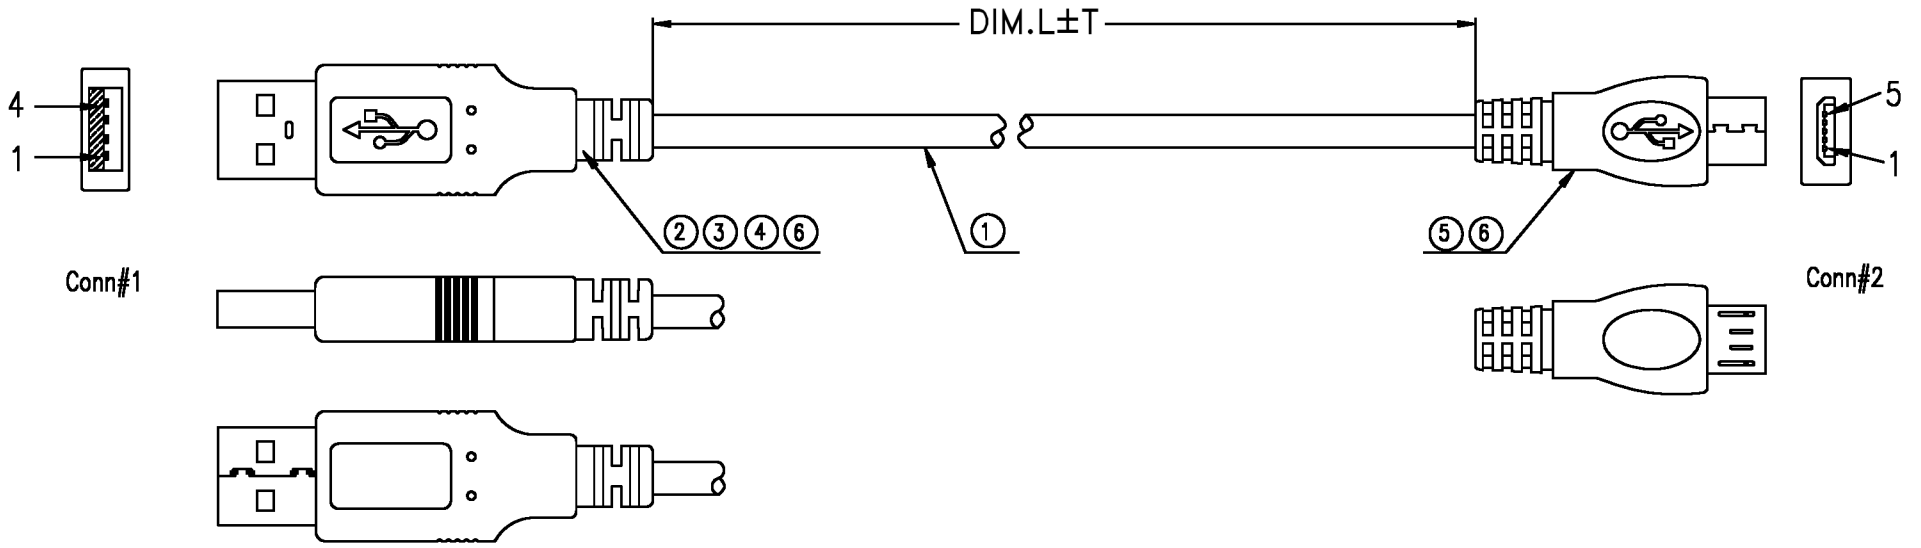

Pin Assignment

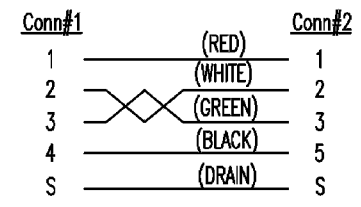

PART NO.1	DIM.L±T
RMIUB05MUA04M0007-01	220±20
RMIUB05MUA04M0010-01	300±20
RMIUB05MUA04M0028-01	850±30
RMIUB05MUA04M0030-01	900±30
RMIUB05MUA04M0033-01	1000±30

Item	Name	Specifications	QTY	UNIT
6	OVER MOLD	PVC 50P, Black	14	G
5	CONNECTOR	USB2.0 Micro B Type, Male, Contact: Gold Flash, Insulator: Black Color	1	PCS
4	BACK SHELL	Back Shell, Nickel Plating, USB 4P Male	1	PCS
3	FRONT SHELL	Front Shell, Nickel Plating, USB 4P Male	1	PCS
2	CONNECTOR	USB2.0 A Type, 4P, Male, Contact: Gold Flash, Insulator: White Color	1	PCS
1	CABLE	UL2725(#28x1P+#28x2C+ADB), OD:3.5mm, Jacket:Black Color, REV: 2.0	1060.0	MM

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION
LINEAR	ANGLE	
X. ±	X° ±	
.X ±	.X° ±	UNITS
.XX ±	.XX° ±	MM
.XXX±	.XXX° ±	SCALE
APPD		SIZE
CHKD		A4
DRAW	Z	AUG. 28' 2019

GTK GOLD-TEK ELECTRIC CO., LTD.

TITLE: USB 4P AM to Micro USB 5P BM Cable (Rev.:2.0)
 CPART NO.

PART NO. RMIUB05MUA04M***-01
 CAD NO. SHEET 1 OF 1
 F:\PDF\RC-A\RC-A0789

圖面編號:GTKSD3429-A(1)