




RML-17 Series



Product features

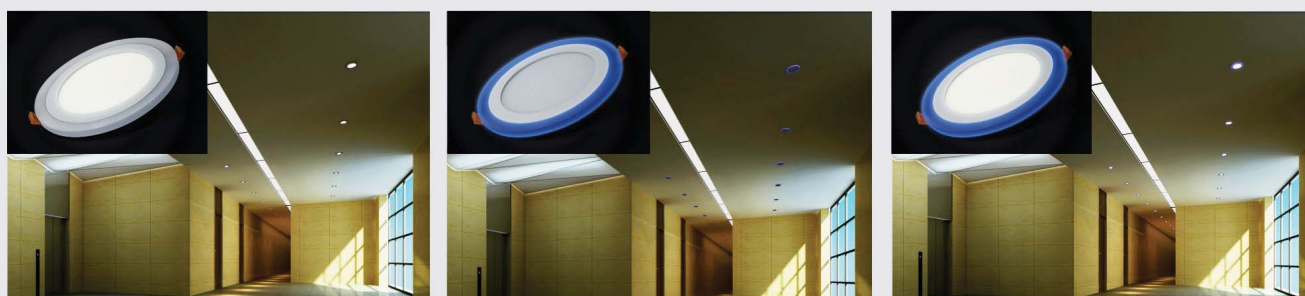

Power First : White



Power Second : Blue Light



Power Third : White&Blue Light



Rear cover: the rear cover is made of 0.8mm-thick iron, with two spraying processes of matte white and fine sand white; the spraying is uniform and the overall texture is exceptional.



Driver: low-voltage constant-current intelligent IC driver is used, which is of integrated design and made of the imported PC material, with dust prevention, compression resistance and high temperature resistance. Ambient temperature for working: -20°C-85°C.



Power line: silica gel is used externally, and it has the joint lock ring design which is easy for installation and disassembly. Pure copper core line is used internally, which has a small resistance, with resistance to bend, flame retardancy, and resistance to high temperature and aging.




Clips: and silicone case: it is made of the superior stainless steel, with strong elasticity, accurate bending angle and corrosion resistance, which is not easy to damage and is high in use security. Silica gel is adopted for jump ring jacket.

RML-17 Series

Applications

- Convention Center
- Hotels
- Boutiques
- Bussiness Center
- Museums
- Home
- Offices
- Hospitals
- Leisure Space. Etc

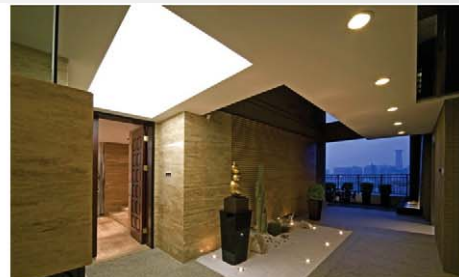

Part number system

$\frac{\text{RML-17}}{\text{X1}}$ - $\frac{2\text{C}}{\text{X2}}$ $\frac{\text{PL}}{\text{X3}}$ $\frac{\text{R}}{\text{X4}}$ - $\frac{14\text{W}}{\text{X5}}$ - $\frac{65\text{K}}{\text{X6}}$

X1=Series

X2=Number of color

2C=2 Colors

X3=Product Type

DL=Down light

PL=Panel Light

X4=Shape

R=Round type

SQ=Square type

X5=Rated Power

14W=14 Watts

X6=Color temperature



30K=3000K

40K=4000K

57K=5700K

65K=6500K

Dimensions

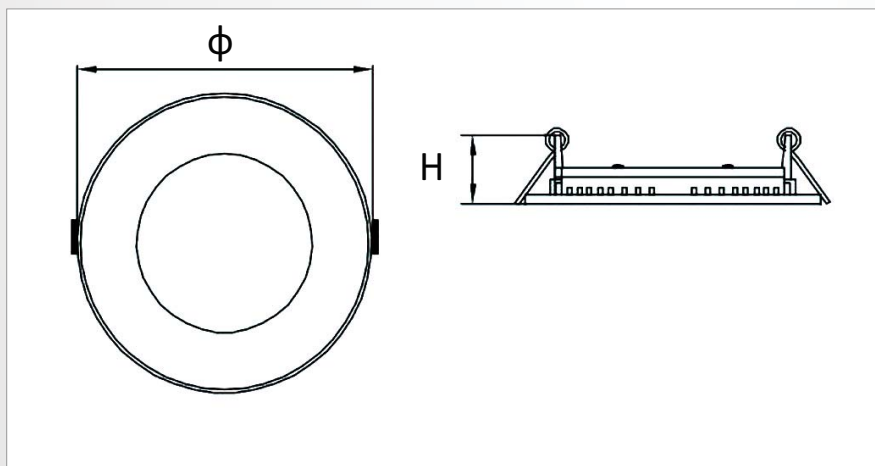

RML-17 Series

Specifications

Power factor:	≥0.9
Power-Supply Efficiency:	≥88%
Color rendering index:	RA≥75
Using Temperature:	-20°C - 50°C
View angle :	120 °

Rated Power	Part No.	Luminous Flux	Color of light	Color temperature	Current	Dimensions (φxH)	Hole dimension	Size
6+1W	RML-17-2CPLR-7W-30K	390 Lm	Warm White	3000 K	Output 1:300 mA/12-25 Vdc Output 2:300 mA/3-5 Vdc	φ143x30 mm.	φ110 mm.	4.5 inch
	RML-17-2CPLR-7W-40K		Neutral White	4000 K				
	RML-17-2CPLR-7W-65K		Daylight	6500 K				
12+2W	RML-17-2CPLR-14W-30K	880 Lm	Warm White	3000 K	Output 1:300 mA/25-45 Vdc Output 2:300 mA/12-25 Vdc	φ193x30 mm.	φ168 mm.	6.5 inch
	RML-17-2CPLR-14W-40K		Neutral White	4000 K				
	RML-17-2CPLR-14W-65K		Daylight	6500 K				